




OVS

OVERLAND VEHICLE SYSTEMS

Ruff Rax Roof Rack Noise Reducer Strip Instructions

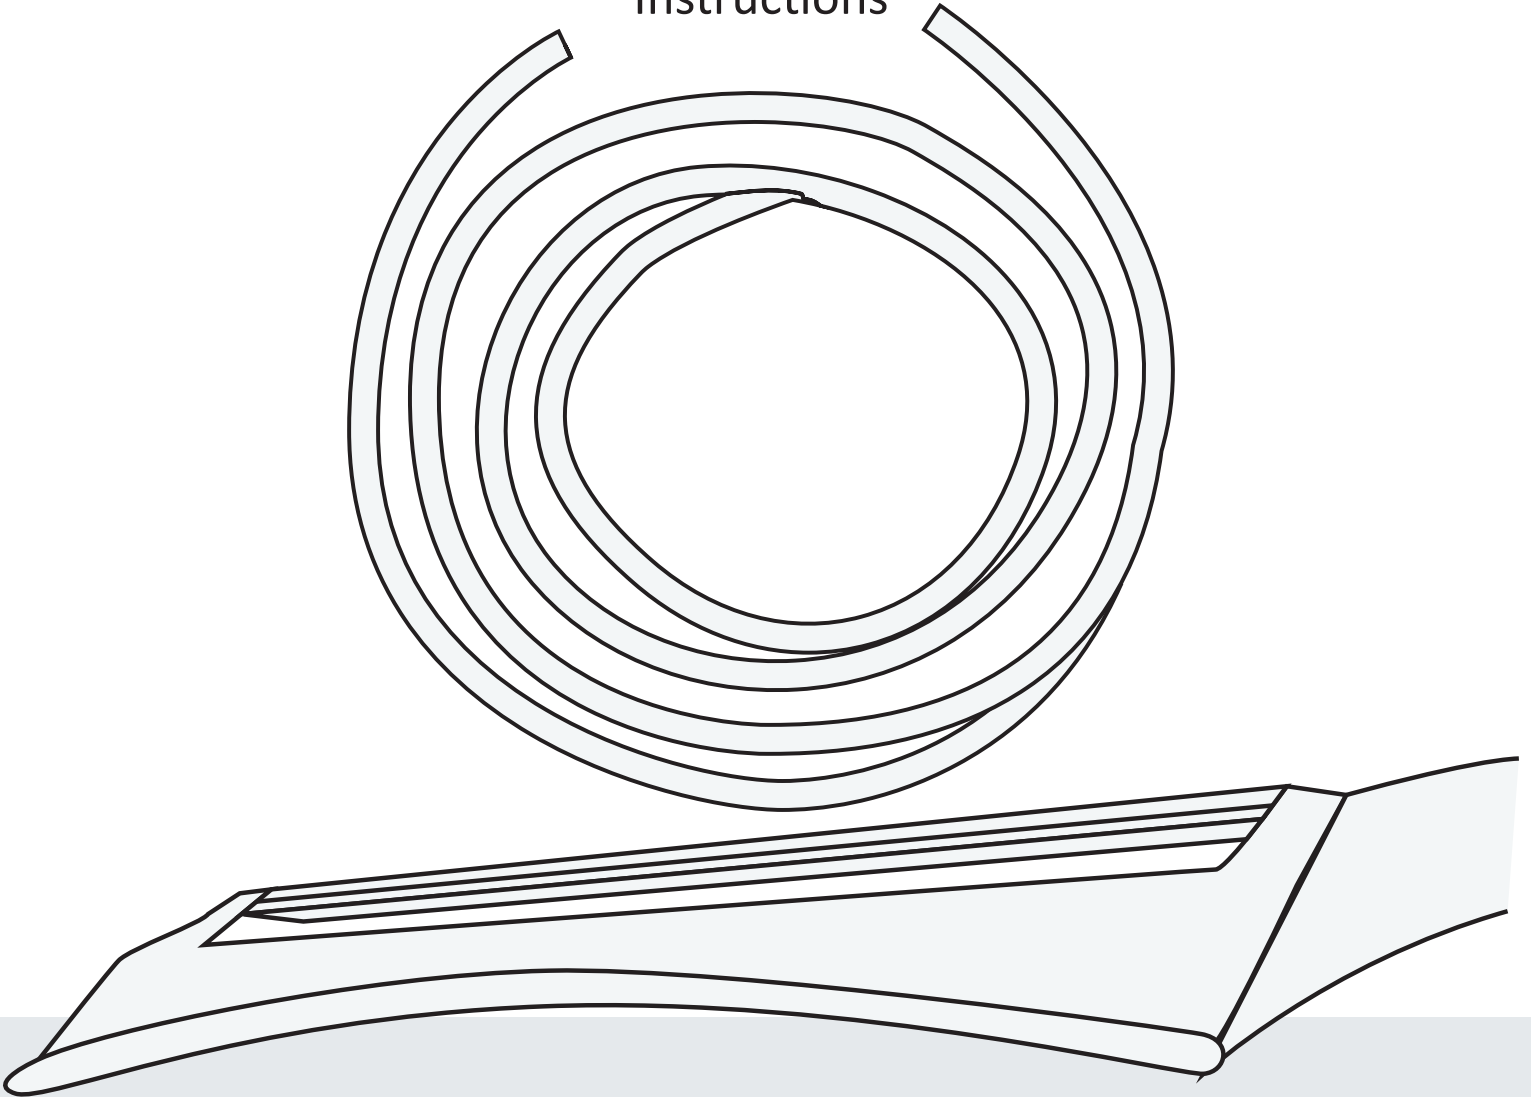


**CAREFULLY READ INSTRUCTIONS PRIOR
TO THE FIRST USE OF THE RUFF RAX
NOISE REDUCER STRIPS**

Ruff Rax Noise Reducer Strip

SET-UP & CARE INSTRUCTIONS

TOOLS NEEDED

QTY	Tool
1	Tin Snips or Wire Cutters

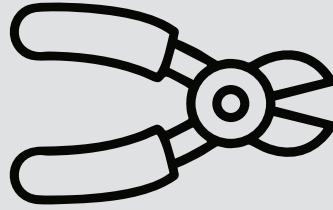


INSTALLATION

1

Cut to size


Measure the required length along the front fascia. Using tin snips or wire cutters, trim the piece cleanly to the correct size. Remove any sharp edges after cutting.

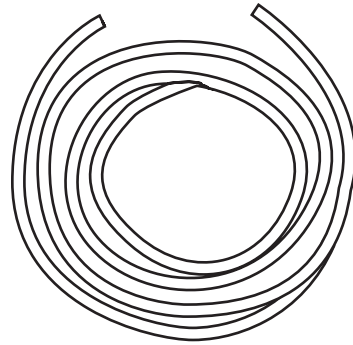

2

Mount to Front Fascia

Position the cut piece against the fascia and align it with the mounting points. Secure it, ensuring it sits flush and straight across the front surface.

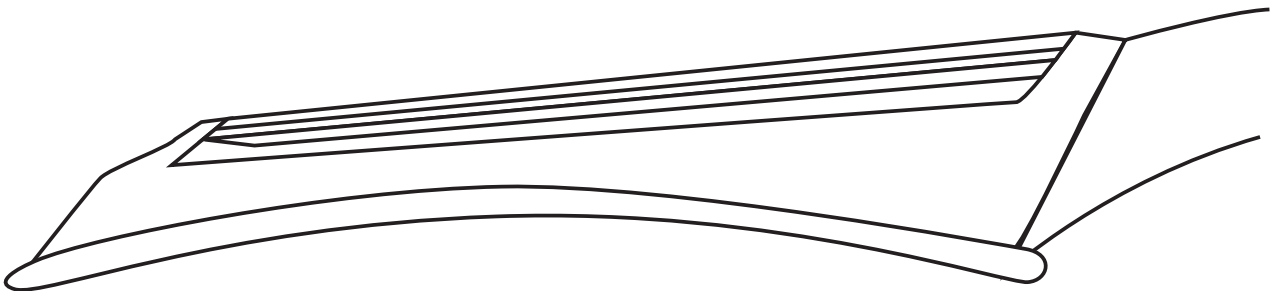

Ruff Rax Noise Reducer Strip

SET-UP & CARE INSTRUCTIONS



WARNINGS

- Always ensure the noise reducer is securely installed before driving.
- Do not use if any part is damaged, cracked, or excessively worn.
- This product reduces wind noise but will not eliminate it completely.
- Noise levels may vary depending on your vehicle, roof rack, and driving speed
- Improper installation may cause increased noise or product detachment.
- Keep all components away from moving parts of the vehicle.
- Exposure to extreme weather conditions may affect product lifespan—inspect regularly.
- Do not modify the product, as this may affect performance and safety.



DO YOU NEED OUR HELP?



CUSTOMER SUPPORT 833-226-4863



SALES@OVERLANDVEHICLESYSTEMS.COM

WANT TO SHOW US YOUR RIG?
CHECK OUT OUR SOCIAL!

@overlandvehiclesystems



APRIL 2026