For using AS-300.

Before operating your AS-300, please read this manual thoroughly and keep it for future reference.

NIPPON VIDEO SYSTEM accepts no liability whatever for incidental damages arising out of the use or inability to use the product, including, but not limited to, damage to the camera, etc., corruption or loss of data, lost business revenue or suspension of business operations.

NIPPON VIDEO SYSTEM accepts no liability whatever for damages arising from improper use not conforming to the instructions in the instruction manuals.

## ■Features

- ·Compact zoom demand for a camera/LANC camera made in the companies, SONY, CANON, JVC KENWOOD.
- ·Compatible with Panasonic camera.
- ·Compatible with CANON new camera protocol.
- •Distinguishes automatically the camera connected by the remote control cable.

# ■Use

### Installation:

Loosen the clamp, put the pan bar of tripod in between the main body and the clamp, and tighten it.

#### Connection:

Connect the REMOTE connector( $2.5\phi$  jack) of the main body with the camera by the  $2.5\phi$  plug cable supplied.


### · Operation:

ZOOM knob:

When the knob is turned to right (T=TELE), the lens becomes to TELE (for zoom in), and when turned to left (W=WIDE), it becomes to WIDE angle (for zoom out). REC button:

When the button is pushed, REC starts. When pushed once again, REC stops.

# ■Dimensions / Functions

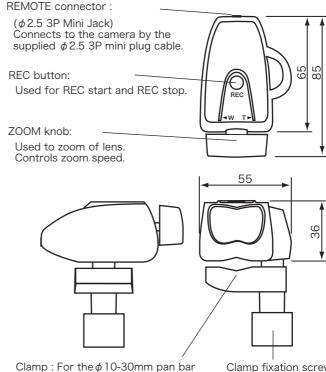

Clamp fixation screw

# ■Specifications

Support	SONY, CANON, JVC KENWOOD camera/LANC camera CANON new camera protocol Panasonic camera	
INPUT/OUTPUT	REMOTE connector	2.5 φ 3P Mini Jack
	ZOOM knob	Control the zoom speed of lens
	REC button	Video recording activation
GENERAL	Cable	$2.5\phi$ 3P Mini Plug Cable 510mm
	Clamp	10-30 <i>ϕ</i>
	Size(WxHxD)	55 x 36 x 85 mm (Main body)
	Weight	0.1 kg (Including Clamp)
Accessories	$2.5\phi$ 3P Mini Plug Cable (Length : 510mm)	
	Operating Instructions	