

HSI high speed interface



www.renishaw.com/hsi


Specification

Principal application	The HSI processes signals from RENCACE™ or standard hard-wired probes and converts them into machine outputs, which are then transmitted to the CNC control.
Transmission type	Hard-wired
Probes per system	One
Compatible probes	MP250, LP2, TS27R, TS34 and RP3
Supply voltage	11 Vdc to 30 Vdc
Supply current	40 mA @ 12 V, 23 mA @ 24 V
Output signal	Probe Status Voltage-free solid-state relay (SSR) output, configurable normally open or normally closed.
Input/output protection	Supply protected by resettable fuse. Outputs protected by overcurrent protection circuit.
Diagnostic LEDs	Error, status and probe type. Connection provided for remote device (LED or buzzer).
Probe vibration filter	A trigger delay circuit (8 ms) helps to reduce false triggers caused by machine vibration
Mounting	DIN rail mounting. Alternative mounting using screws.
Operating temperature	+5 °C to +55 °C (+41 °F to +131 °F)


For further information and the best possible application and performance support please contact Renishaw or visit

www.renishaw.com/hsi

HSI dimensions

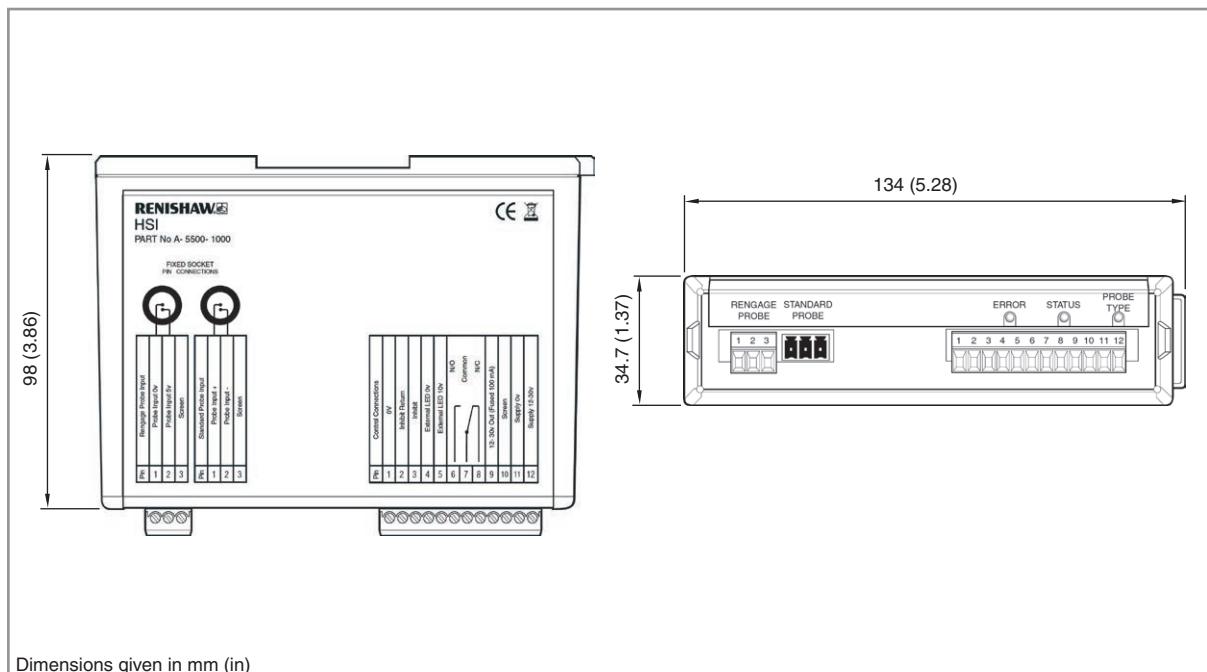

Typical HSI system

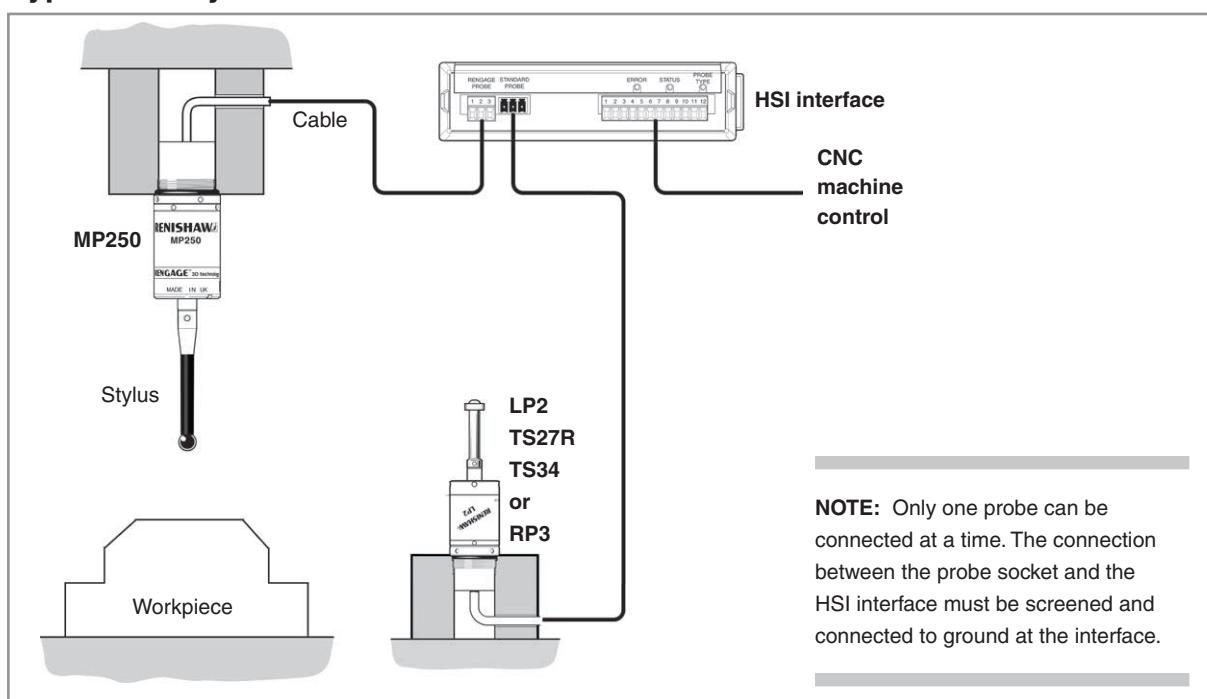

Spare parts and accessories

A full range of spare parts and accessories is available.
 Please contact Renishaw for a full list.

**For worldwide contact details, please visit our
 main website at www.renishaw.com/contact**

RENISHAW HAS MADE CONSIDERABLE EFFORTS TO ENSURE THE CONTENT OF THIS DOCUMENT IS CORRECT AT THE DATE OF PUBLICATION BUT MAKES NO WARRANTIES OR REPRESENTATIONS REGARDING THE CONTENT. RENISHAW EXCLUDES LIABILITY, HOWSOEVER ARISING, FOR ANY INACCURACIES IN THIS DOCUMENT.

