

AerPPC Lite

13inch / 15inch Fanless Elegant Panel PC



FEC

PP-1453 (13")

PP-1455 (15")

New generation fanless Panel PC in 13" & 15" with innovative features, high & reliable quality and state of the art designs.

FEC proudly present better and lighter Panel PC featuring new Intel® processor AerPPC Lite PP-1453 & PP-1455. It is beautifully designed with multiple innovative features for modern business. In the new era of mobility, this slim & light system is extremely easy to be integrate with brand new AerTab AT-1450 as well as other FEC terminals and peripherals.

Add-on Devices

All AerPPC Lite add-on devices use a USB interface for reliable, simple installation and maintenance.



PP-1453

PP-1455

Features



Cross OS Platform (Windows / Android).




With same MB, it is easy integrating and setting AerPPC Lite & AerTab to comprehensive and flexible solutions.



Efficient cable management in dual-hinge stand.



Dual-hinge stand in black and silver color.

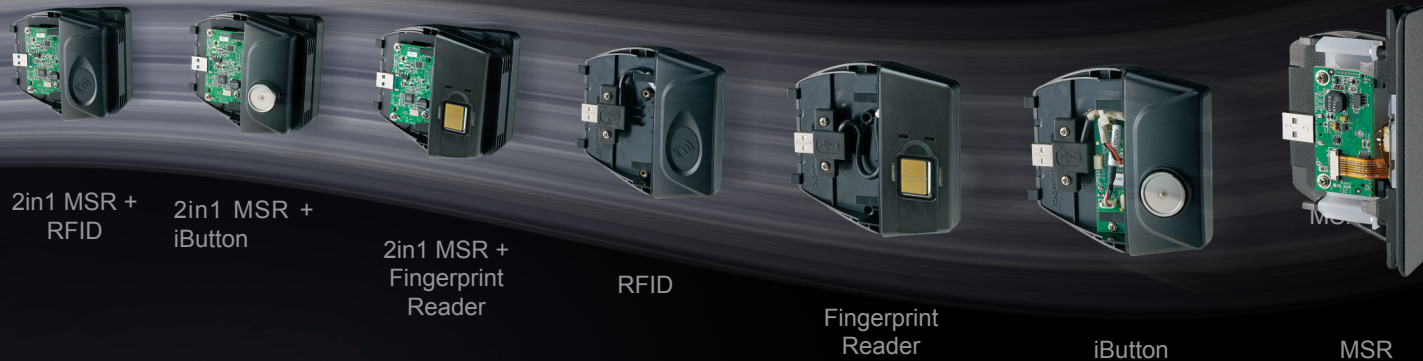

Peripherals



Built-in Wi-Fi and Bluetooth.



Integrated Customer Display



Integrated AerArm 12inch Display



Standard base optional



Tiny foot print, ultra slim profile, foldable dual-hinge stand for outstanding space saving.

Customer Display	2nd Display
<p>VFD</p> <p>LCM</p>	
<ul style="list-style-type: none"> • Various Customer Display Options 	<ul style="list-style-type: none"> • Choose from 12" or 13.3" or 15" • Optional Touch Support (all sizes) • Optional USB Hub and Audio Support

Model	PP-1453		PP-1455	
Processor	Intel Cherry Trail Quad Core Atom X5 Z8300 1.44G (TurboBoost to 1.84G)			
System Memory	LPDDR3 2G	LPDDR3 4G	LPDDR3 2G	LPDDR3 4G
Power Supply	12V 90W adaptor / 12V 150W adaptor (Optional)			
Built-in Storage	eMMC 32G (for Android)	eMMC 64G (for Windows)	eMMC 32G (for Android)	eMMC 64G (for Windows)
Connection	Wifi 802.11b / g / n 2.4Ghz; Bluetooth 4.0			
Speaker	2 x 2W Speakers			
Construction	Aluminum Die-casting + Plastic			
Touch LCD Display				
Size / Resolution	13.3" TFT-LED / 1366 X 768		15" TFT-LED / 1024 X 768	
Brightness (Backlight Type) & Touch Screen	220 cd/m2 (LED); 5-Wire Resistive Touch		350 cd/m2 (LED); 5-Wire Resistive Touch / Projected Capacitive Touch	
I/O Ports				
USB Port	5 x External (1 x USB 3.0, 3 x USB 2.0, 1 x Side USB 2.0)			
Cash Drawer Port	1 x RJ11 (12V Default / 24V with Type B I/O Only)			
LAN Port	1 x RJ45 LAN			
Video Port	1 x HDMI			
Audio	1 x Line-Out (Option)			
DC Power	1 x Input 12V DC			
Optional I/O Board (Factory Install Only)				
Type A	1 x Power USB 12V / 3 x RJ45 COM / 1 x DC 12V Output			
Type B	1 x Power USB 24V / 3 x RJ45 COM / 1 x DC 12V Output			
Supported OS				
Windows	N/A	Windows 10	N/A	Windows 10
Android	Android 5.1	N/A	Android 5.1	N/A
Dimensions & Weight				
Product (W x H x D)	13inch: 340 (W) x 290 (H) x 220 (D) mm, 3.3 Kg / 15inch: 360 (W) x 330 (H) x 220 (D) mm, 3.7 Kg			
Carton (W x H x D)	13inch: 480 (W) x 460 (H) x 320 (D) mm, 5 Kg / 15inch: 480 (W) x 460 (H) x 320 (D) mm, 5.2 Kg			
Operation Conditions				
Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)			
Storage Temperature	-20°C ~ 60°C (-4°F ~ 130°F)			

*Specifications are subject to change without notice.