
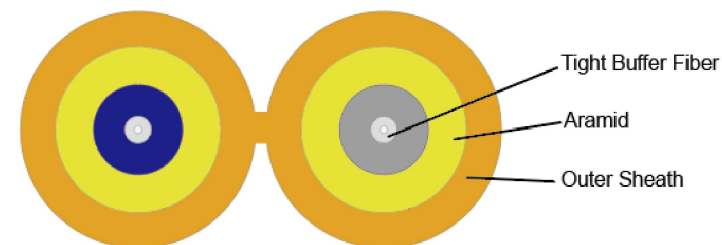


REV.	LOCATION	DATE	DESCRIPTION

LC/UPC -ST/UPC Patch Cord SM OS2 Duplex 2.0mm LSZH Yellow

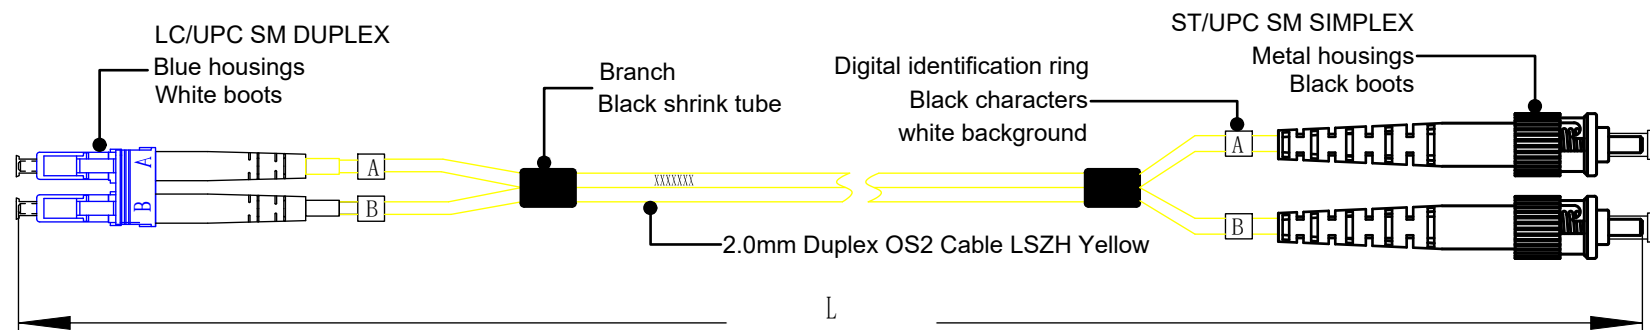

Cable Structure

PART NO.	CABLE LENGTH
FL-LCST-OS2 -01M	1 Meter
FL-LCST-OS2 -02M	2 Meter
FL-LCST-OS2 -03M	3 Meter
FL-LCST-OS2 -04M	4 Meter
FL-LCST-OS2 -05M	5 Meter
FL-LCST-OS2 -06M	6 Meter
FL-LCST-OS2 -07M	7 Meter
FL-LCST-OS2 -08M	8 Meter
FL-LCST-OS2 -09M	9 Meter
FL-LCST-OS2 -10M	10 Meter
FL-LCST-OS2 -15M	15 Meter
FL-LCST-OS2 -20M	20 Meter
FL-LCST-OS2 -25M	25 Meter
FL-LCST-OS2 -30M	30 Meter

Fiber Type	SM OS2
Attenuation Coefficient	1310nm $\leq$ 0.34dB/km 1550nm $\leq$ 0.24dB/km
Length Error	
L $\leq$ 10m, Δ L(length error):0 $\leq$ Δ L $\leq$ 10cm	
L $>$ 10m, Δ L(length error):0 $\leq$ Δ L $\leq$ 1%*L	

Type	LC	ST	Optical Fiber Type	SM OS2
Specification	UPC	UPC	Optical Fiber Specification	9/125um
Performance	IL	$\leq$ 0.30dB	Operating temperature(°C)	-25 $\sim$ +70
	RL	$\geq$ 50dB	Storage temperature(°C)	-25 $\sim$ +70
Material	LSZH		Wavelength(nm)	1310/1550
Colour	Yellow		Diameter of cable(mm)	2.0*4.0
Unit	mm	Ver.	D1	
Unit	1:1	Date		
Page	1/1	Drawing by		
Material:		Drawing by		
		Drawing by		

