



MPO/PC -MPO/PC Patch Cord MM OM4 12 Core 3.0mm LSZH Aqua

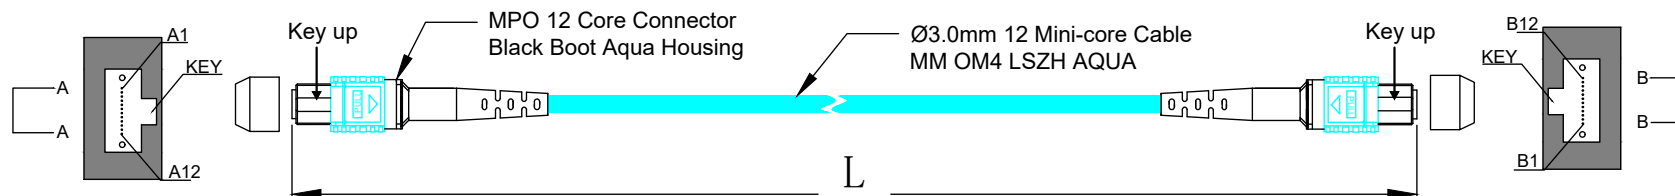

A		B
Pin No.	Fiber colour	Pin No.
1	Blue	12
2	Orange	11
3	Green	10
4	Brown	9
5	Gray	8
6	White	7
7	Red	6
8	Black	5
9	Yellow	4
10	Violet	3
11	Pink	2
12	Aqua	1

Polarity for 12 fibers

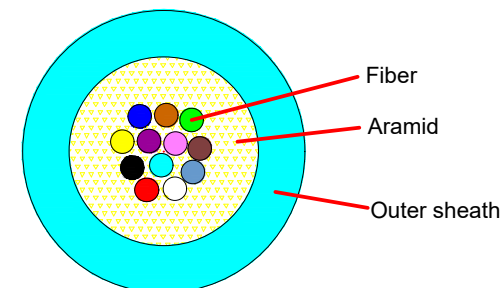

Cable Structure

PART NO.	CABLE LENGTH
FL-MPMP-OM4-01M	1 Meter
FL-MPMP-OM4-02M	2 Meter
FL-MPMP-OM4-03M	3 Meter
FL-MPMP-OM4-05M	5 Meter
FL-MPMP-OM4-10M	10 Meter
FL-MPMP-OM4-15M	15 Meter
FL-MPMP-OM4-30M	30 Meter

Fiber Type	MM OM4
Attenuation Coefficient	850nm≤3.0dB/km 1300nm≤1.0dB/km
Length Error	
L≤10m, ΔL(length error):0≤ΔL≤10cm	
L>10m, ΔL(length error):0≤ΔL≤1%*L	

Type	MPO	MPO	Optical Fiber Type	MM OM4
Specification	PC	PC	Optical Fiber Specification	50/125um
Performance	IL	≤0.70dB	Operating temperature(°C)	-25~+70
	RL	≥25dB	Storage temperature(°C)	-25~+70
Material	LSZH		Wavelength(nm)	850/1300
Colour	Aqua		Diameter of cable(mm)	3.0
Unit	mm	Ver.	D1	 Build It Bigger. Build It Faster. Build It Sooner.
Unit	1:1	Date		
Page	1/1	Drawing by		
Material:		Drawing by		