



OASIS INTERNATIONAL



AQUA POINTE™

SPORTS BOTTLE FILLER

MWSMG8SBF, MWSMG12SBF, MWSMG12SBF

Suggested Specification

Model MWSMG8SBF shall deliver 8.0 gph of 50°F water at 90°F ambient and 80°F inlet water. Model MWSMG12SBF shall deliver 12.0 gph of 50°F water at 90°F ambient and 80°F inlet water. Model MWSMG8SBF is a non-refrigerated Bottle Filler and delivers ambient water. Unit shall be mechanically activated. Unit shall include carbon filtration for taste, odor, and chlorine removal. Key AquaPointe bottle filler molded components contain Freshield, WHICH UTILIZES a silver-based antimicrobial compound that reduces the growth of micro-organisms and mildew to protect the surfaces from discoloration, odors and degradation. Basin shall be designed to eliminate splashing and standing water. Cooling system shall use R-134a refrigerant.

Model

MWSMG8SBF delivers 8.0 gallons of chilled water per hour

MWSMG12SBF delivers 12.0 gallons of chilled water per hour

MWSMG8SBF is a non-refrigerated bottle filler.

Standard Features

- > Built-in 100 micron strainer stops particles before they enter the waterway
- > Waterways are Lead-free in Materials & Construction
- > Heavy Duty steel frame
- > High Efficiency cooling tank and coil
- > Refrigerant R-134a
- > Mechanically activated push button

Finishes

- > Standard cabinet finish: Brushed Stainless Steel
- > Optional cabinet finish: Regency Bronze

Installation

- > Prior to installing, consult with local, state and federal codes for proper mounting height
- > Shipped with complete instructions and wall mounting bracket
- > Removable front panels allow for easy access to filtration and refrigeration unit



Freshield



SURFACE MOUNT

Doesn't need a cut-out for the unit to mount in the wall, only a small cut-out for the water line.

Options (at additional cost)

- Ultra Violet filtration

ADA Compliant for reach ranges. These models meet guidelines for children's (ages 5 and up) accessibility providing the floor to button height is less than 40 inches and proper clear floor space is provided for frontal approach.

Components in this fountain are lead free as defined by the Safe Drinking Water Act Amendments of 1986, and the Lead Contamination Control Act of 1988.

Product Certified to NSF/ANSI Standard 61, Annex G (weighted average lead content of $\leq 0.25\%$) and is in compliance with California's Health & Safety Code Section 116875 (commonly known as AB1953). The Green Filter has been tested to ANSI / NSF standards 42 not by NSF.

Models covered by this specification comply with all known Plumbing Codes. Listed by Underwriters' Laboratories to U.S. and Canadian standards.

Note: chiller units sold with these models must be remotely located, as they do not fit into the housing of the unit, or inside the wall cavity of a typical stud wall



Oasis International Product
Certified by NSF to
NSF/ANSI Standard 61, G


Model	50° F Drinking Water 90° F Ambient Air Temp*		115 Volts, 60 HZ			Cabinet Color Finish	Net Wt. Approx.
	Rated Capacity GPH	Base Rate GPH	Compr. HP	Full Load Amps	Rated Watts		
MWSMSBF						Yes	36 Lbs.
MWSM8SBF	8.0	8.0	1/5	4.6	340	Yes	80 Lbs.
MWSM12SBF	12.0	12.0	1/5	8.7	620	Yes	80 Lbs.

*Industry Standard Rating Condition 80° F inlet water temperature.

Specifications subject to change without notice

OASIS™ SPORTS BOTTLE FILLER MODEL MWMSG8BF, MWMSG8SBF, MWMSG12SBF

TRIM BEZEL INSTALLATION

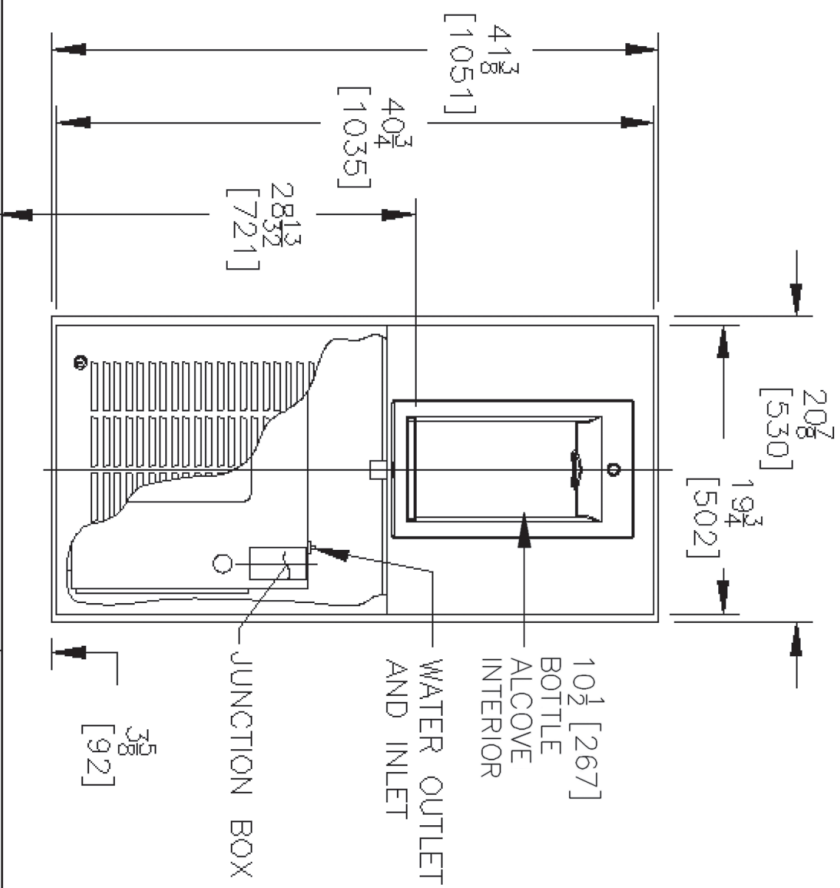


NOTES:

1. RECOMMENDED ADULT HEIGHT INSTALLATION SHOWN. ADJUST VERTICAL DIMENSIONS AS REQUIRED TO COMPLY WITH FEDERAL, STATE AND LOCAL CODES.
2. STOP VALVE, TRAP, PIPE CONNECTOR TO WASTE LINE NOT PROVIDED.
3. ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS.



ROUGHING-IN AND DIMENSIONAL DRAWING

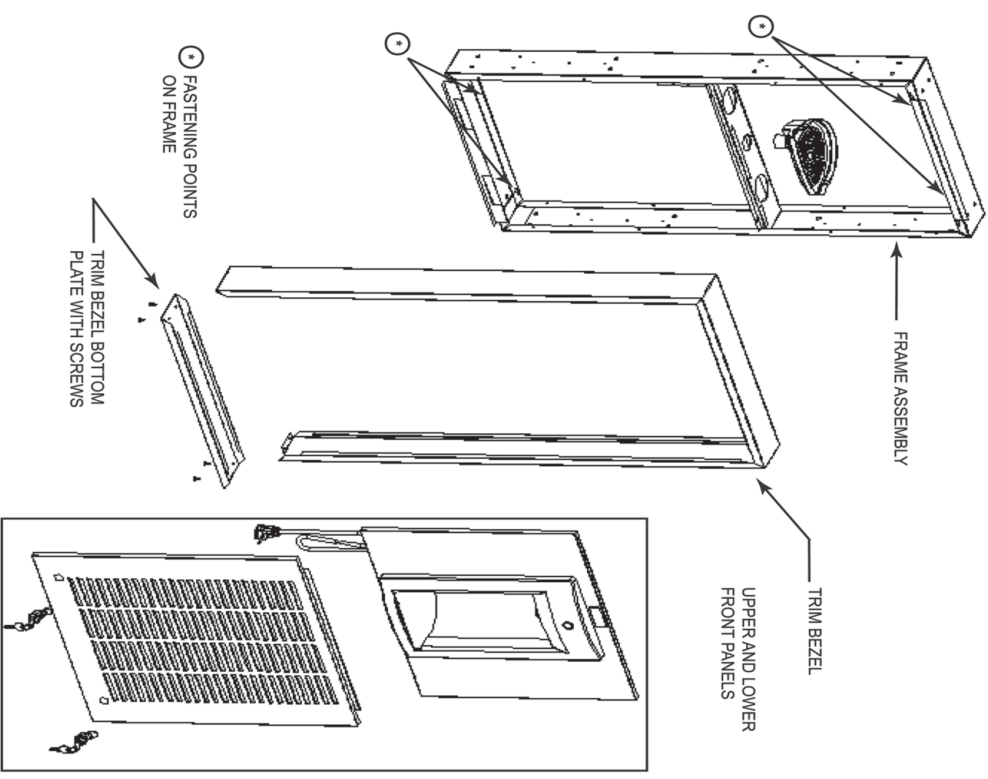

- INSTALL FRAME ASSEMBLY TO A FLAT SURFACE. USE APPROPRIATE FASTENING HARDWARE (NOT INCLUDED). REFER TO THE FIRST TWO PAGES OF THIS INSTRUCTION PACKAGE FOR CORRECT INSTALLATION HEIGHT.
- REMOVE BOTTOM PLATE FROM TRIM BEZEL (4 SCREWS).
- INSTALL TRIM BEZEL TO FRAME ASSEMBLY AND REPLACE BOTTOM PLATE WITH SCREWS.
- INSTALL DRAIN ASSEMBLY, SNAP BUSHINGS AND ANY OTHER ACCESSORIES INCLUDED WITH THIS KIT.
- INSTALL UPPER AND LOWER FRONT PANEL.