

[Log in](#)

Cisco Catalyst 9300 Series Switches Data Sheet

Updated: October 9, 2025

[Bias-Free Language](#)



Take advantage of limited-time promotions and offers on Cisco Catalyst Switching.

Upgrade now and enjoy the savings.

Built to reimagine connection, reinforce security, and redefine experience

Cisco Catalyst™ 9300 Series Switches are Cisco's lead stackable enterprise access switching platform and, as part of the Catalyst 9000 family, are built to transform your network to handle a hybrid world where the workplace is anywhere, endpoints could be anything, and applications are hosted all over the place.

The Catalyst 9300 Series, including the Catalyst 9300X models, continues to shape the future with continued innovation that helps you reimagine connections, reinforce security and redefine the experience for your hybrid workforce, big or small. With Catalyst 9300 Series switches, you choose how you want to manage your network – on-premises, virtual, or from the cloud.

The many industry firsts of the Catalyst 9300 Series include:

- **Up to 1 TB of stacking bandwidth:** With Cisco StackWise-1T, Catalyst 9300 Series switches are the industry's highest-density stacking bandwidth solution with the most flexible uplink architecture.
- **Flexible and dense uplink offerings** with 100 Gigabit Ethernet (G), 40G, 25G, Multigigabit, 10G, and 1G modular uplinks.
- **Mixed stacking with backward compatibility:** Stack your Catalyst 9300X fiber switches with Catalyst 9300 and Catalyst 9300X Multigigabit switches, bringing stackable high-speed fiber to the access layer.
- **Highest number of Multigigabit ports:** With standalone and StackWise-1T, Catalyst 9300X models enable 48 Multigigabit ports in standalone mode and 448 Multigigabit ports with an 8-member stack.
- **Highest 90W UPOE+ density:** Enable your OT/IT needs with up to 48 ports of 90W Cisco UPOE+ in

standalone mode or 384 ports of 90W UPOE+ with an 8-member stack.

- **StackPower with backward compatibility:** Enable power resiliency with higher power budgets in a mixed Catalyst 9300 and Catalyst 9300X stack.
- **100G IPsec in hardware:** Built on the Cisco® Unified Access Data Plane (UADP) 2.0sec Application-Specific Integrated Circuit (ASIC), the Catalyst 9300X models come with 100G line-rate IPsec to enable various options for new edge connectivity.
- **Secure tunnel connectivity:** With the new edge, the Catalyst 9300X enables secure connections to secure internet gateways, cloud service providers, and site-to-site connectivity using IPsec tunnels with 256-bit Advanced Encryption Standard encryption (AES-256) and speeds up to 100G.
- **Enhanced application hosting:** With twice the capacity and additional RAM, Intel® QuickAssist Technology (QAT), and 2x 10G AppGig ports, the Catalyst 9300X models can host multiple Cisco Signed performance-savvy applications.
- **ThousandEyes enabled:** Enable end-to-end visualization of the path from campus/branch to clouds/data center with Cisco ThousandEyes® Network and Application Synthetics (included with Cisco DNA Advantage licenses).
- **Cisco ASAc firewall enabled:** Using application hosting, Cisco Adaptive Security Virtual Appliance (ASAc) and stateful inspection of traffic can be seamlessly added to existing networks without any additional hardware.
- **Cloud management:** Migrate Catalyst 9300 Series switches to the Cisco Meraki® dashboard to unlock centralized management and monitoring of devices while retaining advanced features like a cloud-hosted command-line interface terminal. Learn more.
- **Investment protection:** Catalyst 9300X redundant fans and power supplies, data stack, and StackPower cables are backward compatible with the Catalyst 9300 Series.

The Foundation of Software-Defined Access

Advanced persistent security threats. The exponential growth of Internet of Things (IoT) devices. Mobility everywhere. Cloud adoption. All of these require a network fabric that integrates advanced hardware and software innovations to automate, secure, and simplify customer networks. The goal of this network fabric is to enable customer revenue growth by accelerating the rollout of business services.

The Cisco Networking Cloud with Software-Defined Access (SD-Access) is the network fabric that powers business. It is an open and extensible, software-driven architecture that accelerates and simplifies your enterprise network operations. The programmable architecture frees your IT staff from time-consuming, repetitive network configuration tasks so they can focus instead on innovation that positively transforms your business. SD-Access enables policy-based automation from edge to cloud with foundational capabilities that include:

- Simplified device deployment
- Unified management of wired and wireless networks

- Network virtualization and segmentation
- Group-based policies
- Context-based analytics

Cisco Catalyst, Cisco DNA, and Meraki software

Cisco Catalyst, Cisco DNA, and Meraki software subscriptions offer a valuable and flexible way to buy software for the access layer, WAN, and data center domains. At each stage in the product lifecycle, Cisco Catalyst, Cisco DNA, and Meraki software helps make buying, managing, and upgrading your network and infrastructure software easier. Cisco software provides:

- Flexible licensing models to smoothly distribute customers' software spending over time.
- Investment protection for software purchases through software services-enabled license portability.
- Access to updates, upgrades, and new technology from Cisco through CiscoSoftware Support Service (SWSS).
- Lower cost of entry with the new Cisco Catalyst Software Subscription for Switching support model.
- Choose what management model works best for you – on-premises, virtual, or in the cloud.
- Access to end-to-end network visibility with Cisco Spaces, service assurance through Cisco ThousandEyes Network and Application Synthetics, and Cisco ASAc firewall (with Cisco Catalyst and Cisco DNA Advantage licenses).

Cisco Catalyst 9300 Series Switches let you manage your entire switching structure as a single, converged component. With one management system, whether on-premises or in the cloud, and one policy for wired and wireless networks, they offer an efficient way to provide more secure access.

Product overview

Product highlights

- Highest wireless scale for Wi-Fi 6 and 802.11ac Wave 2 access points supported on a single switch with select models.
- Catalyst 9300 and Catalyst 9300L/LM models are based on the Cisco UADP 2.0 ASIC with programmable pipeline and micro-engine capabilities, along with template-based, configurable allocation of Layer 2 and Layer 3 forwarding, Access Control Lists (ACLs), and Quality-of-Service (QoS) entries.
- Catalyst 9300X models are based on UADP 2.0sec ASIC, which adds line-rate support for crypto, including 100G hardware-based IPsec.
- x86 CPU complex with 8 GB memory, 16 GB of flash, and an external USB 3.0 SSD pluggable storage slot (delivering up to 240 GB of storage with an optional SSD drive) to host containers. Catalyst 9300X models support 16 GB of memory.

- USB 2.0 slot to load system images and set configurations.
- Up to 1 Tbps of local stackable switching bandwidth with the Catalyst 9300X models.
- Deeper buffer and higher scale model options for rich multimedia content delivery applications.
- Flexible and dense uplink offerings with 100G, 40G, 25G, Multigigabit, 10G, and 1G as fixed or modular uplinks.
- Easy transition from 40G to 100G and 10G to 25G with dual-rate optics.
- Flexible downlink options with 25G, 10G and 1G copper and fiber as well as the densest Multigigabit links.
- With a mix of copper (1G up to 10G) and fiber (1G up to 25G) supported in a single stack, multiple flexible deployment scenarios are enabled, including 2-tier, 3-tier, and hybrid architectures.
- Leading Power over Ethernet (PoE) capabilities with up to 384 ports of PoE per stack, PoE+, and 288 ports of high-density IEEE 802.3bt-90W UPOE+ and 60W Cisco UPOE®.
- Intelligent power management with Cisco StackPower technology, providing power stacking among members for power redundancy. StackPower pools the power supplies across the stack to be used for redundancy and supplemental power purposes.
- Line-rate, hardware-based Flexible NetFlow (FNF), delivering flow collection of up to 128,000 flows with select models.
- IPv6 support in hardware, providing wire-rate forwarding for IPv6 networks.
- Dual-stack support for IPv4/IPv6 and dynamic hardware forwarding table allocations, for ease of IPv4-to-IPv6 migration.
- Support for both static and dynamic Network Address Translation (NAT) and Port Address Translation (PAT).
- IEEE 802.1ba Audio Video Bridging (AVB) built in to provide a better audio and video experience through improved time synchronization and QoS.
- Precision Time Protocol (PTP; IEEE 1588v2) provides accurate clock synchronization with sub-microsecond accuracy, making it suitable for distribution and synchronization of time and frequency over the network.
- Cisco IOS® XE, a modern operating system for the enterprise with support for model-driven programmability, including NETCONF, RESTCONF, YANG, on-box Python scripting, streaming telemetry, container-based application hosting, and patching for critical bug fixes. The OS also has built-in defenses to protect against runtime attacks.
- End-to-end visualization of the path from campus/branch to clouds/data center with Cisco ThousandEyes Network and Application Synthetics (included with a Cisco Catalyst and Cisco DNA Advantage license).
- Fully managed Meraki cloud customers can take advantage of the power of Catalyst 9300 switching in their Meraki cloud through the cloud-management service.
- **SD-Access:** Cisco Catalyst 9300 Series Switches form the foundational building block for SD-Access, Cisco's lead enterprise architecture:

- Policy-based automation from edge to cloud.
- Simplified segmentation and micro-segmentation, with predictable performance and scalability.
- Automation through Cisco Catalyst Center and Meraki dashboard.
- Policy handled through the Cisco Identity Services Engine (ISE).
- Network assurance provided through Cisco Catalyst Center and Meraki dashboard.
- Faster launch of new business services and significantly improved issue resolution time.
- Plug and Play (PnP) enabled: A simple, secure, unified, and integrated offering to ease new branch or campus device rollouts or updates to an existing network.
- Advanced security
 - **Encrypted Traffic Analytics (ETA):** Uses the power of machine learning to identify and take action against threats or anomalies in your network, including malware detection in encrypted traffic (without decryption) and distributed anomaly detection.
 - Support for AES-256 with the powerful MACsec 256-bit encryption algorithm available on all models.
 - **Trustworthy solutions:** Hardware-anchored Secure Boot and Secure Unique Device Identification (SUDI) support for PnP, to verify the identity of the hardware and software.

Platform details

Switch models and configurations

Table 1. Product family configurations

Model	Modular uplinks and speeds	Stacking bandwidth support	Multigigabit density	Cisco StackPower	Hardware-based IPsec	App hostin capac
-------	----------------------------	----------------------------	----------------------	------------------	----------------------	------------------

Model	Modular uplinks and speeds	Stacking bandwidth support	Multigigabit density	Cisco StackPower	Hardware-based IPsec	App hosting capacity
Catalyst 9300X	10G, 25G, 40G, Multigigabit, and 100G	Stackwise-1T (480G when stacking with a Catalyst 9300 model)	48x 10G	✓ (larger power budget)	Up to 100G IPsec *	✓ (2x hosting resources compared to Catalyst 9300 models)
Catalyst 9300	10G, 25G, 40G and Multigigabit	Stackwise-480	48x 5G and 24x 10G	✓	X	✓
Catalyst 9300L	X	Stackwise-320	12x 10G	X	X	✓
Catalyst 9300LM	X	Stackwise-320	8x 10G	X	X	✓

*Need to order HSEC key for IPsec feature.

The Cisco Catalyst 9300 Series consists of 19 modular uplink switch models and 14 fixed uplink switch models.



Figure 1.

Cisco Catalyst 9300 Series Switches

Table 2 lists port scale and power details for the Cisco Catalyst 9300 Series models.

Table 2. Cisco Catalyst 9300 Series switch configurations

Model	Total 10/100/1000, Multigigabit copper or SFP fiber	Uplink configuration	Default AC power supply
Modular uplink models			
C9300X-48HX	48 ports Cisco UPOE+, 48x 10G Multigigabit (10G/5G/2.5G/1G/100M) with 90W UPOE+	Modular uplinks	1100W AC
C9300X-48TX	48 ports data, 48x 10G Multigigabit (10G/5G/2.5G/1G/100M)	Modular uplinks	715W AC
C9300X-48HXN	48 ports Cisco UPOE+, 8x 10G Multigigabit (10G/5G/2.5G/1G/100M) + 40x 5G Multigigabit (5G/2.5G/1G/100M)	Modular uplinks	1100W AC
C9300X-24HX	24 ports Cisco UPOE+, 24x 10G Multigigabit (10G/5G/2.5G/1G/100M)	Modular uplinks	1100W AC
C9300X-12Y	12 ports 25G/10G/1G SFP28	Modular uplinks	715W AC
C9300X-24Y	24 ports 25G/10G/1G SFP28	Modular uplinks	715W AC

Model	Total 10/100/1000, Multigigabit copper or SFP fiber	Uplink configuration	Default AC power supply
C9300-24T	24 ports data	Modular uplinks	350W AC
C9300-48T	48 ports data	Modular uplinks	350W AC
C9300-24P	24 ports PoE+	Modular uplinks	715W AC
C9300-48P²	48 ports PoE+ ENERGY STAR certified	Modular uplinks	715W AC
C9300-24U	24 ports Cisco UPOE	Modular uplinks	1100W AC
C9300-48U	48 ports Cisco UPOE	Modular uplinks	1100W AC
C9300-24UX	24 ports Multigigabit Cisco UPOE (10G/5G/2.5G/1G/100M)	Modular uplinks	1100W AC
C9300-48UXM²	48 ports Cisco UPOE, 36 ports 100M/1G/2.5G + 12 ports Multigigabit (10G/5G/2.5G/1G/100M) ENERGY STAR [®] certified	Modular uplinks	1100W AC
C9300-48UN	48 port 5Gbps Multigigabit UPOE ports (5G/2.5G/1G/100M)	Modular uplinks	1100W AC

Model	Total 10/100/1000, Multigigabit copper or SFP fiber	Uplink configuration	Default AC power supply
C9300-24UB	24 port Cisco UPOE	Modular uplinks	1100W AC
C9300-24UXB	24 ports Multigigabit Cisco UPOE (10G/5G/2.5G/1G/100M)	Modular uplinks	1100W AC
C9300-48UB	48 ports Cisco UPOE	Modular uplinks	1100W AC
C9300-24H	24 ports Cisco UPOE+	Modular uplinks	1100W AC
C9300-48H	48 ports Cisco UPOE+	Modular uplinks	1100W AC
C9300-24S	24 ports 1G SFP	Modular uplinks	715W AC
C9300-48S	48 ports 1G SFP	Modular uplinks	715W AC
Fixed uplink models			
C9300L-24T-4G	24 ports data	4x 1G fixed uplinks	350W AC
C9300L-24T-4X	24 ports data	4x 10G/1G fixed uplinks	350W AC

Model	Total 10/100/1000, Multigigabit copper or SFP fiber	Uplink configuration	Default AC power supply
C9300L-48T-4G	48 ports data	4x 1G fixed uplinks	350W AC
C9300L-48T-4X	48 ports data	4x 10G/1G fixed uplinks	350W AC
C9300L-24P-4G	24 ports PoE+	4x 1G fixed uplinks	715W AC
C9300L-24P-4X	24 ports PoE+	4x 10G/1G fixed uplinks	715W AC
C9300L-48P-4G	48 ports PoE+	4x 1G fixed uplinks	715W AC
C9300L-48P-4X	48 ports PoE+	4x 10G/1G fixed uplinks	715W AC
C9300L-48PF-4G	48 ports PoE+	4x 1G fixed uplinks	1100W AC
C9300L-48PF-4X	48 ports PoE+	4x 10G/1G fixed uplinks	1100W AC
C9300L-24UXG-4X	24 ports Cisco UPOE, 8 ports Multigigabit (10G/5G/2.5G/1G/100M) + 16 ports 1G (1G/100M/10M)	4x 10G/1G fixed uplinks	1100W AC

Model	Total 10/100/1000, Multigigabit copper or SFP fiber	Uplink configuration	Default AC power supply
C9300L-24UXG-2Q	24 ports Cisco UPOE, 8 ports Multigigabit (10G/5G/2.5G/1G/100M) + 16 ports 1G (1G/100M/10M)	2x 40G fixed uplinks	1100W AC
C9300L-48UXG-4X	48 ports Cisco UPOE, 12 ports Multigigabit (10G/5G/2.5G/1G/100M) + 36 ports 1G (1G/100M/10)	4x 10G/1G fixed uplinks	1100W AC
C9300L-48UXG-2Q	48 ports Cisco UPOE, 12 ports Multigigabit (10G/5G/2.5G/1G/100M) + 36 ports 1G (1G/100M/10M)	2x 40G fixed uplinks	1100W AC
C9300LM-48UX-4Y	48 port Cisco UPOE, 8 port 10G Multigigabit (10G/5G/2.5G/1G/100M) + 40 port 1G (1G/100M/10M)	4x 25G fixed uplinks	1000W AC ¹
C9300LM-48U-4Y	48 ports 1G (1G/100M/10M) with Cisco UPOE	4x 25G fixed uplinks	1000W AC ¹
C9300LM-24U-4Y	24 ports 1G (1G/100M/10M) with Cisco UPOE	4x 25G fixed uplinks	600W AC ¹
C9300LM-48T-4Y	48 ports 1G (1G/100M/10M) Data	4x 25G fixed uplinks	600W AC ¹

¹C9300LM models use different power supplies compared to the Catalyst 9300, 9300X, and 9300L models.

²ENERGY STAR certified model.

Network modules

Cisco Catalyst 9300 Series Switches (C9300X and C9300 SKUs) support optional network modules for uplink ports (Figures 2 and 3). These field-replaceable network modules with 25G and 40G speeds in the Cisco Catalyst 9300 Series enable greater architectural flexibility and infrastructure investment protection by allowing a nondisruptive migration from 10G to 25G and beyond. The default switch configuration does not include the network module. When you purchase the switch, you can choose from the network modules described in Table 3.

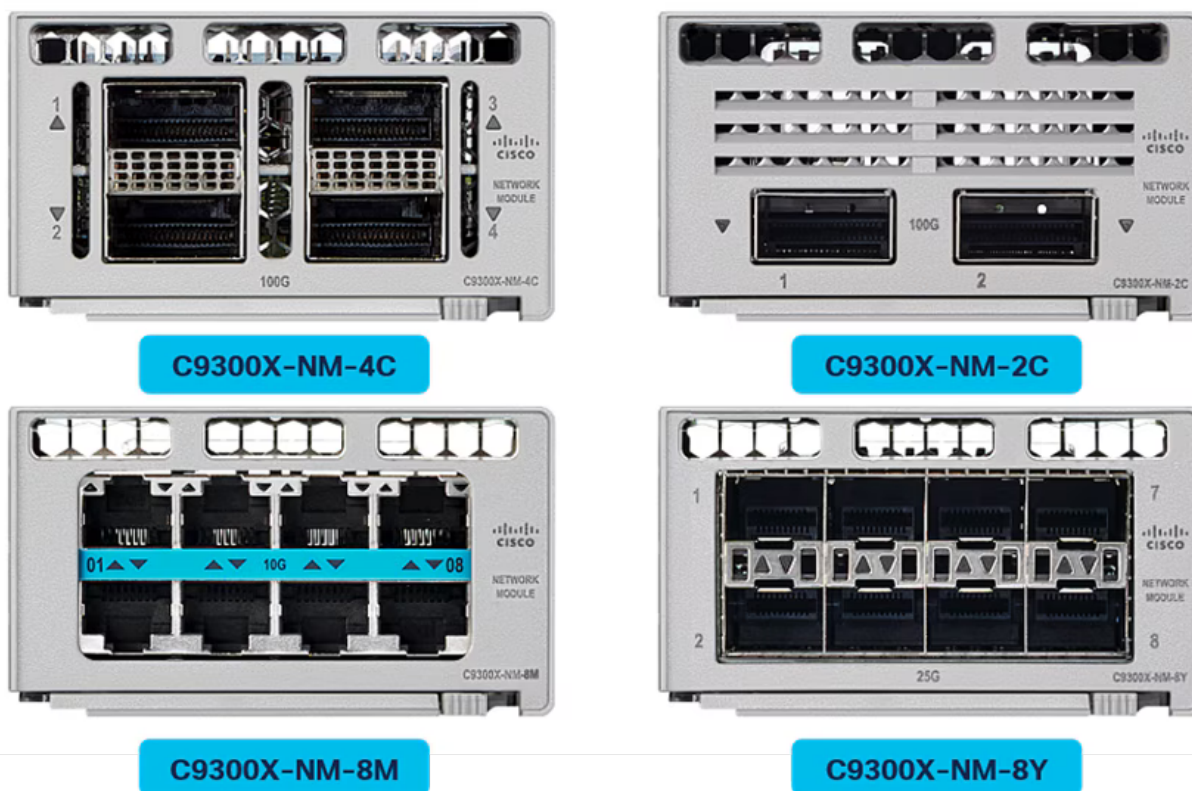


Figure 2.

Cisco Catalyst 9300X network modules



Figure 3.

Cisco Catalyst 9300 Series network modules

Table 3. Network module numbers and descriptions

Network module	Description
C9300X-NM-8M**	Catalyst 9300X 8x 10G/1G Multigigabit Network Module
C9300X-NM-8Y**	Catalyst 9300X 8x 25G/10G/1G Network Module
C9300X-NM-2C**	Catalyst 9300X 2x 100G/40G Network Module
C9300X-NM-4C*	Catalyst 9300X 4x 100G/40G Network Module
C9300-NM-4G	Catalyst 9300 Series 4x 1G Network Module
C9300-NM-4M	Catalyst 9300 Series 4x Multigigabit Network Module
C9300-NM-8X	Catalyst 9300 Series 8x 10G/1G Network Module
C9300-NM-2Q	Catalyst 9300 Series 2x 40G Network Module
C9300-NM-2Y	Catalyst 9300 Series 2x 25G/10G/1G Network Module

*C9300X-NM-4C is compatible only with the C9300X-48HX, C9300X-48TX, and C9300X-24Y models.

**The number of network module ports is limited when a C9300X-NM-xx is used with the C9300X-48HXN models.

Please note: Catalyst 3850 and Catalyst 9300 network modules are supported on the Catalyst 9300 models. Catalyst 9300X network modules are supported only on the Catalyst 9300X models.

For additional details, please read the Cisco Catalyst 9000 Switching Platform FAQ: <https://www.cisco.com/c/dam/en/us/products/collateral/switches/catalyst-9300-series-switches/nb-09-cat-9k->

faq-cte-en.pdf.

Power supplies

Cisco Catalyst 9300 Series Switches support dual redundant power supplies. The switches ship with one power supply by default, and the second power supply can be purchased when the switch is ordered or at a later time. If only one power supply is installed, it should always be in power supply bay #1. The switches also ship with three field-replaceable fans. Power supplies are common across the Catalyst 9300 Series.



Figure 4.

Cisco Catalyst 9300 Series dual redundant power supplies

Table 4 lists the different power supplies available in these switches and available PoE power.

Table 4. Power supply models

Model	Primary power supply	Default or upgrade	Available PoE	With 350W secondary PS	With 715W secondary PS	With 1100W secondary PS
C9300X-48HX	PWR-C1-1900WAC-P	Upgrade	1390W	1740W	2105W	2490W
	PWR-C1-1100WAC-P	Default	590W	940W	1305W	1690W

Model	Primary power supply	Default or upgrade	Available PoE	With 350W secondary PS	With 715W secondary PS	With 1100W secon PS
	P					
C9300X-48TX	PWR-C1-715WAC-P	Default	No PoE	No PoE	No PoE	No Po
C9300X-48HXN	PWR-C1-1900WAC-P	Upgrade	1490W	1840W	2205W	2590V
	PWR-C1-1100WAC-P	Default	690W	1040W	1405W	1790V
C9300X-24HX	PWR-C1-1900WAC-P	Upgrade	1535W	1885W	2160W*	2160V
	PWR-C1-1100WAC-P	Default	735W	1085W	1450W	1835V
C9300X-24Y	PWR-C1-715WAC-P	Default	No POE	No PoE	No PoE	No Po
C9300X-12Y	PWR-C1-715WAC-P	Default	No PoE	No PoE	No PoE	No Po

Model	Primary power supply	Default or upgrade	Available PoE	With 350W secondary PS	With 715W secondary PS	With 1100V secon PS
C9300-48H	PWR-C1-1900WAC-P	Upgrade	1622W	1972W	2337W	2722V
	PWR-C1-1100WAC-P	Default	822W	1172W	1537W	1922V
C9300-24H	PWR-C1-1900WAC-P	Upgrade	1630W	1980W	2160W*	2160V
	PWR-C1-1100WAC-P	Default	830W	1180W	1545W	1930V
C9300-48UN	PWR-C1-1900WAC-P	Upgrade	1445W	1795W	2160W	2545V
	PWR-C1-1100WAC-P	Default	645W	995W	1360W	1745V
C9300-48UXM	PWR-C1-1900WAC-P	Upgrade	1290W	1640W	2005W	2880V
	PWR-	Default	490W	840W	1205W	1590V

Model	Primary power supply	Default or upgrade	Available PoE	With 350W secondary PS	With 715W secondary PS	With 1100V secon PS
	C1-1100WAC-P					
C9300-24UX	PWR-C1-1900WAC-P	Upgrade	1360W	1440W*	1440W*	1440V
	PWR-C1-1100WAC-P	Default	560W	910W	1275W	1440V
C9300-48U	PWR-C1-1900WAC-P	Upgrade	1622W	1800W**	1800W**	1800V
	PWR-C1-1100WAC-P	Default	822W	1172W	1537W	1800V
C9300-24U	PWR-C1-1900WAC-P	Upgrade	1440W*	1440W*	1440W*	1440V
	PWR-C1-1100WAC-P	Default	830W	1180W	1152W	1440V

Model	Primary power supply	Default or upgrade	Available PoE	With 350W secondary PS	With 715W secondary PS	With 1100W secon PS
C9300-48P	PWR-C1-1100WAC-P	Upgrade	822W	1172W	1440W*	1440V
	PWR-C1-715WAC-P	Default	437W	787W	1152W	1440V
C9300-24P	PWR-C1-1100WAC-P	Upgrade	720W*	720W*	720W*	720W
	PWR-C1-715WAC-P	Default	445W	720W*	720W*	720W
C9300-48T	PWR-C1-350WAC-P***	Default	No PoE	No PoE	No PoE	No Po
C9300-24T	PWR-C1-350WAC-P***	Default	No PoE	No PoE	No PoE	No Po
C9300-48S	PWR-C1-715WAC-P	Default	No PoE	No PoE	No PoE	No Po

Model	Primary power supply	Default or upgrade	Available PoE	With 350W secondary PS	With 715W secondary PS	With 1100W secon PS
C9300-24S	PWR-C1-715WAC-P	Default	No POE	No POE	No PoE	No Po
C9300-48UB	PWR-C1-1100WAC-P	Default	822W	1172W	1537W	1800V
C9300-24UB	PWR-C1-1100WAC-P	Default	830W	1180W	1440W*	1440V
C9300-24UXB	PWR-C1-1100WAC-P	Default	560W	910W	1275W	1440V

Model	Primary power supply	Default or upgrade	Available PoE power	With 350W secondary PS	With 715W secondary PS	Wi 11 se PS
C9300L-24T-4G	PWR-C1-350WAC-P	Default	No PoE	No PoE	No PoE	No

Model	Primary power supply	Default or upgrade	Available PoE power	With 350W secondary PS	With 715W secondary PS	With 1100W secondary PS
C9300L-24T-4X	PWR-C1-350WAC-P	Default	No PoE	No PoE	No PoE	No PoE
C9300L-48T-4G	PWR-C1-350WAC-P	Default	No PoE	No PoE	No PoE	No PoE
C9300L-48T-4X	PWR-C1-350WAC-P	Default	No PoE	No PoE	No PoE	No PoE
C9300L-24P-4G	PWR-C1-715WAC-P	Default	505W	720W*	720W*	720W*
C9300L-24P-4X	PWR-C1-715WAC-P	Default	505W	720W*	720W*	720W*
C9300L-48P-4G	PWR-C1-715WAC-P	Default	505W	855W	1220W	1400W
C9300L-48P-4X	PWR-C1-715WAC-P	Default	505W	855W	1220W	1400W

Model	Primary power supply	Default or upgrade	Available PoE power	With 350W secondary PS	With 715W secondary PS	With 1100W secondary PS
C9300L-48PF-4G	PWR-C1-1100WAC-P	Default	890W	1240W	1440W	1440W
C9300L-48PF-4X	PWR-C1-1100WAC-P	Default	890W	1240W	1440W	1440W
C9300L-24UXG-4X	PWR-C1-1100WAC-P	Default	880W	1230W	1440W	1440W
C9300L-24UXG-2Q	PWR-C1-1100WAC-P	Default	722W	1072W	1440W	1440W
C9300L-48UXG-4X	PWR-C1-1100WAC-P	Default	675W	1025W	1390W	1710W
C9300L-48UXG-2Q	PWR-C1-1100WAC-P	Default	675W	1025W	1390W	1710W

* Limited by port number and port rating (e.g., 24 PoE+ 30W ports = 720W).

** Limited by design.

*** Upgrade options for 715W and 1100W PSUs are available.

Model	Primary power	Default or	Available PoE	With 600W AC	With 715W DC	With 1000W DC
-------	---------------	------------	---------------	--------------	--------------	---------------

	supply	upgrade	power	secondary PS	secondary PS	secc PS
C9300LM-48UX-4Y	PWR-C6-1KWAC	Default	790W	1390W	1505W	1790W
C9300LM-48U-4Y	PWR-C6-1KWAC	Default	790W	1390W	1505W	1790W
C9300LM-24U-4Y	PWR-C6-1KWAC	Upgrade	820W	1420W	1440W*	1440W
	PWR-C6-600WAC	Default	420W	1020W	1135W	1420W
C9300LM-48T-4Y	PWR-C6-600WAC	Default	No PoE	No PoE	No PoE	No PoE

* Limited by port number and port rating (e.g. 24x 60W UPOE ports = 1440W).

Stacking

Cisco Catalyst 9300 Series Switch models are designed for stacking as a single virtual switch, enabling customers to have a single management plane and control plane for up to 448 access ports.



Figure 5.

Cisco Catalyst 9300 Series modular uplink models stack (C9300/C9300X SKUs) and fixed uplink models

stack
(C9300L SKUs).

Table 5 lists the supported stacking options.

Table 5. Supported stacking options

Model	Stacking support	Stacking bandwidth support	Optional stacking hardware	Number of members	Supported stack members
C9300X SKUs	StackWise-1T	1 Tbps	StackWise cable	8	Stacks with other Catalyst 9300X models at StackWise-1T speeds with same license level Stacks with C9300 SKUs at StackWise-480 speeds with same license level
C9300 SKUs	StackWise-480	480 Gbps	StackWise cable	8	Other C9300 SKUs with same license level C9300 higher-scale SKUs only stack with other like higher-scale models
C9300L SKUs	StackWise-320	320 Gbps	C9300L-STACK-KIT Or C9300L-STACK-KIT2	8	Stacks with other Catalyst 9300L and 9300LM models with same license level

Model	Stacking support	Stacking bandwidth support	Optional stacking hardware	Number of members	Supported stack members
C9300LM SKUs	StackWise-320	320 Gbps	C9300L-STACK-KIT2	8	Stacks with other Catalyst 9300L and 9300LM models with same license level

Mixed stacking between Catalyst 9300X and Catalyst 9300 models are supported at StackWise-480 speeds.

Mixed stacking between Catalyst 9300 and Catalyst 9300X and Catalyst 9300 higher-scale models (C9300-24UB, C9300-24UXB, C9300-48UB) is **not supported**. You cannot stack fixed uplink models (C9300L SKUs) with modular uplink models (C9300 SKUs) or other Catalyst switches, such as the Cisco Catalyst 3850 and 3650 Series. Any combination of Catalyst 9300 Series models can form a stack. Separately, any combination of Catalyst 9300L models can form a stack.

Catalyst 9300 Series higher-scale SKUs (C9300-24UB, C9300-24UXB, C9300-48UB) need to be stacked with other higher-scale models.

StackWise cables that are available to configure stacking with Catalyst 9300 Series modular uplink models (C9300X and C9300 SKUs) come in lengths of 0.5m, 1m, and 3m.

The optional StackWise-320 kit for Catalyst 9300 Series fixed uplink models (C9300L and 9300LM SKUs) consists of two stack adapters and a stacking cable. The default stacking cable is 0.5m, but options of 1m and 3m are also available. Table 6 lists the stacking accessories.

Table 6. Stacking accessories

Model	Description
STACK-T1-50CM	Data stack 50 cm (cable option with C9300 and C9300X SKUs)
STACK-T1-1M	Data stack 1m (cable option with C9300 and C9300X SKUs)

Model	Description
STACK-T1-3M	Data stack 3m (cable option with C9300 and C9300X SKUs)
C9300L-STACK-KIT	Stack kit for C9300L SKUs only: Two data stack adapters and one data stack cable
STACK-T3-50CM	Data stack 50cm cable (default cable with C9300L Stack Kit)
STACK-T3-1M	Data stack 1m cable (cable option with C9300L Stack Kit)
STACK T3-3M	Data stack 3m cable (cable option with C9300L Stack Kit)
C9300L-STACK-KIT2	Stack kit for C9300LM and C9300L SKUs: Two data stack adapters and one data stack cable
STACK-T3A-50CM	Data stack 50cm cable (default cable with C9300L Stack Kit2)
STACK-T3A-1M	Data stack 1m cable (cable option with C9300L Stack Kit2)
STACK T3A-3M	Data stack 3m cable (cable option with C9300L Stack Kit2)



Figure 6.

Cisco Catalyst 9300 Series fixed uplink models with optional stack kit

Fan

Cisco Catalyst 9300 Series Switches also come with three field-replaceable fans and support (N+1) redundancy. Table 7 lists the fan module part number.

Table 7. Fan module

Model	Description
FAN-T2=	Fan module

Performance and scalability

Performance and scalability metrics for the Cisco Catalyst 9300 Series are provided in Table 8.

Performance specifications

Table 8. Performance specifications

Description	Catalyst 9300X modular uplink models	Catalyst 9300 modular uplink models	Catalyst 9300 higher-scale models	Catalyst 9300L/LM fixed uplink models
Total number of MAC addresses	32,000	32,000	64,000	32,000
Total number of IPv4 routes (ARP plus learned routes)	39,000 (24,000 direct routes and 15,000 indirect routes)	32,000 (24,000 direct routes and 8000 indirect routes)	112,000 (48,000 direct routes and 64,000 indirect routes)	32,000 (24,000 direct routes and 8000 indirect routes)

Description	Catalyst 9300X modular uplink models	Catalyst 9300 modular uplink models	Catalyst 9300 higher-scale models	Catalyst 9300L/LM fixed uplink models
IPv6 routing entries	19,500	16,000	56,000	16,000
Multicast routing scale	8,000	8,000	16,000	8,000
QoS scale entries	4,000	5,120	18,000	5,120
ACL scale entries	8,000	5,120	18,000	5,120
Packet buffer per SKU	16-MB buffer for 48-port 5G Multigigabit, 24- port 10G Multigigabit and 12-port fiber 32-MB buffer for 48-port 10G Multigigabit and 24-port fiber	16-MB buffer for 24- or 48- port Gigabit Ethernet models 32-MB buffer for 24- and 48- port Multigigabit	32-MB buffer for 24-and 48- port Gigabit Ethernet models 64-MB buffer for 24-port Multigigabit model (24UXB)	16-MB buffer for 24- and 48- port Gigabit Ethernet models
FNF entries	64,000 flows on 48-port 5G Multigigabit and 24-port 10G Multigigabit and 12-port fiber 128,000 flows on 48-port 10G	64,000 flows on 24-and 48-port Gigabit Ethernet models 128,000 flows on 24-port Multigigabit	128,000 flows on 24-and 48- port Gigabit Ethernet models 256,000 flows on 24-port Multigigabit	64,000 flows on 24-and 48-port Gigabit Ethernet models

Description	Catalyst 9300X modular uplink models	Catalyst 9300 modular uplink models	Catalyst 9300 higher-scale models	Catalyst 9300L/LM fixed uplink models
	Multigigabit and 24-port fiber			
DRAM	16 GB	8 GB	8 GB	8 GB
Flash	16 GB	16 GB	16 GB	16 GB
VLAN IDs	4094	4094	4094	4094
PVST Instances	300	300	300	300
STP virtual ports (port* VLANs) for PVST	13,000	13,000	13,000	13,000
STP virtual ports (port* VLANs) for MST	13,000	13,000	13,000	13,000
Total switched virtual interfaces (SVIs)	1000	1000	1000	1000
Jumbo frames	9198 bytes	9198 bytes	9198 bytes	9198 bytes

Description	Catalyst 9300X modular uplink models	Catalyst 9300 modular uplink models	Catalyst 9300 higher-scale models	Catalyst 9300L/LM fixed uplink models
Total routed ports per Catalyst 9300 Series stack	448	448	448	416

Bandwidth specifications

Table 9. Bandwidth specifications

SKU	Switching capacity	Switching capacity with stacking	Forwarding rate	Forwarding rate with stacking
C9300X-48TX	1,760 Gbps	2,760 Gbps	1309 Mpps	2232 Mpps
C9300X-48HX	1,760 Gbps	2,760 Gbps	1309 Mpps	2232 Mpps
C9300X-48HXN	960 Gbps	1960 Gbps	714.24 Mpps	1458.24 Mpps
C9300X-24HX	800 Gbps	1,880 Gbps	654.72 Mpps	1398.72 Mpps
C9300X-12Y	1,000G	2,000G	744Mpps	1488mpps
C9300X-24Y	2,000 Gbps	3,000 Gbps	1488 Mpps	2232 Mpps
C9300-24T	208 Gbps	688 Gbps	154.76 Mpps	511.90 Mpps

SKU	Switching capacity	Switching capacity with stacking	Forwarding rate	Forwarding rate with stacking
C9300-48T	256 Gbps	736 Gbps	190.47 Mpps	547.62 Mpps
C9300-24P	208 Gbps	688 Gbps	154.76 Mpps	511.90 Mpps
C9300-48P	256 Gbps	736 Gbps	190.47 Mpps	547.62 Mpps
C9300-24U	208 Gbps	688 Gbps	154.76 Mpps	511.90 Mpps
C9300-48U	256 Gbps	736 Gbps	190.48 Mpps	547.62 Mpps
C9300-24UX	640 Gbps	1120 Gbps	476.19 Mpps	833.33 Mpps
C9300-48UXM	580 Gbps	1060 Gbps	431.54 Mpps	788.69 Mpps
C9300-48UN	640 Gbps	1120 Gbps	476.19 Mpps	833.33 Mpps
C9300-24UB	208 Gbps	688 Gbps	154.76 Mpps	511.90 Mpps

SKU	Switching capacity	Switching capacity with stacking	Forwarding rate	Forwarding rate with stacking
C9300-48UB	256 Gbps	736 Gbps	190.48 Mpps	547.62 Mpps
C9300-24UXB	640 Gbps	1120 Gbps	476.19 Mpps	833.33 Mpps
C9300-24H	208 Gbps	688 Gbps	154.76 Mpps	511.90 Mpps
C9300-48H	256 Gbps	736 Gbps	190.48 Mpps	547.62 Mpps
C9300-24S	208 Gbps	688 Gbps	154.76 Mpps	511.90 Mpps
C9300-48S	256 Gbps	736 Gbps	190.47 Mpps	547.62 Mpps
C9300X-12Y	1,000 Gbps	2,000 Gbps	744.04 Mpps	1488 Mpps
C9300X-24Y	2,000 Gbps	3,000 Gbps	1488 Mpps	2232 Mpps
C9300LM-48UX-4Y	440 Gbps	760 Gbps	327.36 Mpps	565.44 Mpps
C9300LM-48U-4Y	296 Gbps	616 Gbps	220.22 Mpps	458.30 Mpps

SKU	Switching capacity	Switching capacity with stacking	Forwarding rate	Forwarding rate with stacking
C9300LM-24U-4Y	248 Gbps	568 Gbps	184.51 Mpps	422.59 Mpps
C9300LM-48T-4Y	296 Gbps	616 Gbps	220.22 Mpps	458.30 Mpps
C9300L-24T-4G	56 Gbps	376 Gbps	41.66 Mpps	279.76 Mpps
C9300L-24T-4X	128 Gbps	448 Gbps	95.23 Mpps	333.33 Mpps
C9300L-48T-4G	104 Gbps	424 Gbps	77.38 Mpps	315.48 Mpps
C9300L-48T-4X	176 Gbps	496 Gbps	130.95 Mpps	369.05 Mpps
C9300L-24P-4G	56 Gbps	376 Gbps	41.66 Mpps	279.76 Mpps
C9300L-24P-4X	128 Gbps	448 Gbps	95.23 Mpps	333.33 Mpps
C9300L-48P-4G	104 Gbps	424 Gbps	77.38 Mpps	315.48 Mpps
C9300L-48P-4X	176 Gbps	496 Gbps	130.95 Mpps	369.05 Mpps
C9300L-48PF-4G	104 Gbps	424 Gbps	77.38 Mpps	315.48 Mpps

SKU	Switching capacity	Switching capacity with stacking	Forwarding rate	Forwarding rate with stacking
C9300L-48PF-4X	176 Gbps	496 Gbps	130.95 Mpps	369.05 Mpps
C9300L-24UXG-4X	272 Gbps	592 Gbps	202.38 Mpps	440.47 Mpps
C9300L-24UXG-2Q	352 Gbps	672 Gbps	261.90 Mpps	500.00 Mpps
C9300L-48UXG-4X	392 Gbps	712 Gbps	291.66 Mpps	529.76 Mpps
C9300L-48UXG-2Q	472 Gbps	792 Gbps	351.19 Mpps	589.28 Mpps

All models are at wire-speed nonblocking performance for both IPv4 and IPv6. The forwarding rates in the table above are measured with 64-byte IPv4 packet sizes.

SD-Access architecture

What if you could give time back to IT? Provide network access in minutes for any user or device to any application – without compromise? SD-Access provides the industry’s first policy-based automation from network edge to cloud. Your foundation for your digital network, Cisco SD-Access. Built on the principles of Cisco DNA, SD-Access provides end-to-end segmentation to keep user, device, and application traffic separate without a redesign of the network. It automates user access policy so organizations can make sure the right policies are set for any user or device with any application across the network. This is accomplished with a single network fabric across LAN and WLAN, which creates a consistent user experience anywhere without compromising on security.

There are many challenges today in managing the network to drive business outcomes. These limitations are due to manual configuration and fragmented tool offerings. SD-Access provides:

- A transformational management solution that reduces operational expenses and enhances business agility
- Consistent management of wired and wireless network provisioning and policy
- Automated network segmentation and group-based policy
- Contextual insights for fast issue resolution and capacity planning
- Open and programmable interfaces for integration with third-party solutions

For an overview of the key use cases SD-Access addresses, refer to the SD-Access Solution Overview.

Platform benefits

Cisco IOS XE opens a completely new paradigm in network configuration, operation, and monitoring through network automation. Cisco's automation solution is open, standards-based, and extensible across the entire lifecycle of a network device. The various automation mechanisms are outlined below.

- **Automated device provisioning** is the ability to automate the process of upgrading software images and installing configuration files on Cisco Catalyst switches when they are being deployed in the network for the first time. Cisco provides both turnkey solutions such as PnP and off-the-shelf tools such as zero-touch provisioning (ZTP) and Preboot Execution Environment (PXE) that enable an effortless and automated deployment.
- **API-driven configuration** is available with modern network switches such as the Cisco Catalyst 9300 Series. It supports a wide range of automation features and provides robust open APIs over NETCONF, RESTCONF, and GNMI using YANG data models for external tools, both off-the-shelf and custom built, to automatically provision network resources.
- **Granular visibility** enables model-driven telemetry to stream data from a switch to a destination. The data to be streamed is identified through subscription to a data set in a YANG model. The subscribed data set is streamed to the destination at specified intervals. Additionally, Cisco IOS XE enables the push model. It provides near-real-time monitoring of the network, leading to quick detection and rectification of failures.
- **Seamless software upgrades and patching** supports OS resilience. Cisco IOS XE supports patching, which provides fixes for critical bugs and security vulnerabilities between regular maintenance releases. This support lets you add patches without having to wait for the next maintenance release.

Security

- **Encrypted Traffic Analytics (ETA)** is a unique capability for identifying malware in encrypted traffic coming from the access layer. Since more and more traffic is becoming encrypted, the visibility this feature affords for threat detection is critical for keeping your network secure at different layers.
- **AES-256 MACsec encryption** is the IEEE 802.1AE standard for authenticating and encrypting packets between switches. The Cisco Catalyst 9300 Series Switches support 256-bit and 128-bit

AES, providing the most secure link encryption.

- **IPsec encryption** delivers secure end-to-end encrypted traffic between sites and connectivity to the Cloud. Catalyst 9300X models support line-rate IPsec up to 100 Gbps, delivering uncompromised secure connectivity.
- **Trustworthy solutions built with Cisco Trust Anchor technology** provide a highly secure foundation for Cisco products. With the Catalyst 9300 Series, this technology enables hardware and software authenticity assurance for supply chain trust and strong mitigation against man-in-the-middle attacks that compromise software and firmware. Trust Anchor capabilities include:
 - **Image signing:** Cryptographically signed images provide assurance that the firmware, BIOS, and other software are authentic and unmodified. As the system boots, the system's software signatures are checked for integrity.
 - **Secure Boot:** Cisco Secure Boot technology anchors the boot sequence chain of trust to immutable hardware, mitigating threats against a system's foundational state and the software that is to be loaded, regardless of a user's privilege level. It provides layered protection against the persistence of illicitly modified firmware.
 - **Cisco Trust Anchor module:** A tamper-resistant, strong cryptographic, single-chip solution provides hardware authenticity assurance to uniquely identify the product so that its origin can be confirmed to Cisco. This provides assurance that the product is genuine.

Cloud Security

- **Cisco Umbrella® DNS integration:**

Small to midsize networks reliant on managed service providers can now host the Cisco Umbrella agent directly on their Catalyst 9300 Series Switches. This allows the business to easily customize its DNS filtering policies granularly at the user or group level to prevent bring-your-own-device (BYOD) or IoT guest or corporate users from accessing malicious or inappropriate websites, without having to rely on the service provider to push the policies out. It also lets the business optimize use of bandwidth by allowing direct cloud access for trusted apps. Requires a Cisco Catalyst and Cisco DNA Advantage license and Cisco Umbrella license per device.

- **Cisco ASAc app hosting integration:**

The integration of ASAc on Cisco Catalyst 9000 switches simplifies the network design by providing the flexibility to plug small-form-factor firewalls into the network closer to the source. It also avoids complex tunnels to centralized firewalls. This design lowers the total cost of ownership by reducing the number of physical firewall appliances in the network.

The ASAc Firewall App hosting solution hosts a virtual firewall or ASAc on Cisco Catalyst 9300 Series Switches. All the physical firewalls next to a switch can be virtualized and deployed on the switch itself. As in a traditional network, the SecOps team manages the ASAc firewalls deployed on the Catalyst switches, and the NetOps team instantiates the application and performs lifecycle management using Cisco Catalyst Center. The SecOps team controls policy management using

Cisco Defense Orchestrator. Both the SecOps and NetOps teams can seamlessly manage the network without any disruptions.

The container version of Cisco ASAc provides full firewall functionality to secure IT, OT, and IoT converged networks. ASAc uses Layer 3 firewall policies and does a stateful inspection of the traffic.

The ASAc firewall runs on a 240-GB external SSD that is mounted on a Cisco Catalyst 9300 Series Switch. Cisco Catalyst Center deploys the ASAc on these Catalyst switches, and ASAc is then onboarded to Cisco Defense Orchestrator.

Service assurance

▪ Cisco ThousandEyes integration:

Deliver a superior network and service experience for your users, employees, and partners with groundbreaking observability from network to app. Cisco ThousandEyes network tests are now integrated into Cisco Catalyst 9300 Series Switches with Cisco Catalyst and Cisco DNA Advantage licenses, giving you visibility beyond your campus perimeter so you can resolve issues faster. The Cisco ThousandEyes Network and Application Synthetics license is included by default upon the selection of a Cisco Catalyst and Cisco DNA Advantage option with a 3-year, 5-year, or 7-year subscription. Please see Cisco Catalyst and DNA Advantage Use Right to ThousandEyes for more information about the free Cisco ThousandEyes entitlements that come with your Cisco Catalyst 9300 or 9400 Series switch's Cisco DNA Advantage subscription.

Resiliency and high availability

- **StackWise-1T:** Cisco Catalyst 9300 Series modular uplink models (C9300X SKUs) support the industry's highest back-panel stacking bandwidth solution (1 Tbps) with StackWise-1T. Up to eight switches can be configured in a StackWise-1T with the special connector at the back of the switch, using dedicated stack cables.
- **StackWise-480:** Cisco Catalyst 9300 Series modular uplink models (C9300 SKUs) support a high-speed back-panel stacking bandwidth solution (480 Gbps) with StackWise-480. Up to eight switches can be configured in a StackWise-480 with the special connector at the back of the switch, using dedicated stack cables.
- **StackWise-320:** Cisco Catalyst 9300 Series fixed uplink models (C9300L and C9300LM SKUs) support a stacking bandwidth solution (320 Gbps) with StackWise-320. Up to eight switches can be optionally configured in a StackWise-320 with the special stack kit at the back of the switch, using dedicated stack cables.
- **Cisco StackPower:** Cisco StackPower is an innovative power interconnect system that allows the power supplies in a stack to be shared as a common resource among all the switches. This allows you to simply add one extra power supply in any switch of the stack and either provide power redundancy for any of the stack members or simply add more power to the shared pool. Up to four switches can be configured in a StackPower stack with the special connector at the back of the

switch. However, with the use of the XPS-2200 appliance, up to eight switches can be configured in the StackPower stack. **Cisco StackPower is supported only on the models with a modular uplink stack - C9300 and C9300X SKUs. Catalyst 9300X models support StackPower+, delivering more power over StackPower cables compared to the Catalyst 9300 models.**



Figure 7.

Cisco Catalyst 9300 Series StackPower

High availability: The Catalyst 9300 Series supports high-availability features, including the following:

- Cross-stack EtherChannel provides the ability to configure Cisco EtherChannel technology across different members of the stack for high resiliency.
- **Flexlink+:** Flexlink+ allows you to set up active and backup interfaces or port channels, which can provide Layer 2 failover redundancy without the use of Spanning Tree Protocol (STP).
- **Extended fast software upgrade** provides the ability to upgrade the platform software or to reload the system in under 30 seconds of traffic impact, in both standalone and stack configurations.
- IEEE 802.1s Multiple Spanning Tree Protocol (MSTP) provides rapid spanning tree convergence independent of spanning tree timers and also offers the benefit of Layer 2 load balancing and distributed processing.
- Per-VLAN Rapid Spanning Tree (PVRST+) allows rapid spanning tree (IEEE 802.1w) reconvergence on a per-VLAN spanning tree basis, providing simpler configuration than MSTP. In both MSTP and PVRST+ modes, stacked units behave as a single spanning tree node.
- Switch-port auto-recovery (“err-disable” recovery) automatically attempts to reactivate a link that is disabled because of a network error.

- The Catalyst 9300 Series platform delivers an industry-leading Non-Stop Forwarding (NSF)/Stateful Switchover (SSO) resiliency architecture in a stackable solution with sub-50-ms failover.
- Always-on wireless network with stateful switchover when wireless functionality is enabled on stack of Catalyst 9300 Series Switches.

Deep buffer technology

The Catalyst 9300 Series higher-scale models have a deeper buffer to address the requirements of rich multimedia lossless content delivery and large routing tables in a fixed access solution with a wide range of uplink choices for deployment flexibility.

Flexible NetFlow

- Cisco IOS Software FNF is the next generation in flow visibility technology. It enables optimization of the network infrastructure, reduces operating costs, and improves capacity planning and security incident detection with increased flexibility and scalability. The Catalyst 9300 Series is capable of up to 64,000 flow entries on 48-port, 24-port, and 12-port models and up to 128,000 flow entries on Multigigabit models.

Application visibility and control

- Next-Generation Network-Based Application Recognition (NBAR2) enables advanced application classification techniques, up to 1400 predefined and well-known application signatures, and up to 150 encrypted applications on the Cisco Catalyst 9000 switches. Some of the most popular applications included are Skype, Office 365, Microsoft Lync, Webex, and Facebook, among many others that are predefined and easy to configure. NBAR2 provides the network administrator with an important tool to identify, control, and monitor end-user application usage while helping ensure a quality user experience and securing the network from malicious attacks. NBAR2 leverages FNF to report application performance and activities within the network to any supported NetFlow collector, such as Cisco Prime[®], Cisco Secure Network Analytics, or any compliant third-party tool.

QoS

- **Superior QoS:** The Cisco Catalyst 9300 Series offers Gigabit Ethernet speeds with intelligent services that keep traffic flowing smoothly, even at 10 times the normal network speed. Industry-leading mechanisms for cross-stack marking, classification, and scheduling deliver superior performance for data, voice, and video traffic at wire speed. Superior QoS includes granular wireless bandwidth management and fair sharing, 802.1p Class of Service (CoS) and Differentiated Services Code Point (DSCP) field classification, Shaped Round Robin (SRR) scheduling, Committed Information Rate (CIR), and eight egress queues per port.

Service discovery

- **Multicast DNS (mDNS) gateway:** This service discovery gateway capability facilitates sharing of services advertised using the Apple mDNS (Bonjour) protocol, such as printers, Apple TVs, and file services across the network. Additionally, the administrator can create policies defining which services can be seen and accessed by the users in the network. This capability facilitates a BYOD rollout.

Smart operation

- **Simplified Campus Automation** is designed to optimize the discovery and configuration of devices in your network with a more streamlined simple and easy-to-use automation tool. With features such as simplified discovery, IT can discover devices within the network with just a few steps. Also available is a more streamlined GUI that provides a simplified view of switch configurations and software details on a port-by-port basis.
- **Cloud management with IOS XE:** Cloud management with IOS XE simplifies network operations by providing a centralized, intuitive dashboard that enables IT teams to manage, configure, and monitor all devices in real time. With features like zero-touch provisioning, automated firmware updates, and port-level visibility, cloud management reduces manual effort, minimizes errors, and delivers end-to-end visibility across the network.

The Cisco Catalyst 9300 Series Switches provide flexibility in cloud management by offering the ability to choose the configuration source of each device managed from the Meraki dashboard.

Configuration Source: Cloud: This operating mode offers the full cloud management experience. Device configurations are managed via the Meraki user interface and delivered entirely from the cloud. This capability also offers a read-only Cloud CLI terminal to view the entire running configuration or perform advanced troubleshooting using IOS XE show commands.

Configuration Source: Device: This capability is an evolution of Cloud Monitoring. With device configuration, users can onboard their device to the cloud to access central monitoring and troubleshooting tools, as well as a Cloud CLI terminal to execute read/write commands.

Configurations are managed via local console, Secure Shell (SSH), or CLI and remain local to the device.

To learn more about cloud management with IOS XE, see [Cloud Management with IOS XE](#).

- **Meraki dashboard monitoring and management:** Catalyst 9300 Series Switches can be ordered or migrated to be Meraki dashboard managed, combining the simplicity of the Meraki dashboard with the power of Catalyst 9000 switching. All configuration and monitoring is performed natively in the dashboard.
- **WebUI:** WebUI is an embedded GUI-based device-management tool that provides the ability to provision the device, to simplify device deployment and manageability, and to enhance the user experience. It comes with the default image, so there is no need to enable anything or install any

license on the device. You can use WebUI to build configurations, and to monitor and troubleshoot the device without having CLI expertise.

- **Efficient switch operation***: Cisco Catalyst 9300 Series Switches provide optimum power saving with Energy Efficient Ethernet (EEE) on the RJ-45 ports and low-power operations for industry best-in-class power management and power consumption capabilities. The ports support reduced power modes so that ports not in use can move into a lower power utilization state. Other efficient switch operation features are as follows:
 - Per-port power consumption command allows customers to specify a maximum power setting on an individual port.
 - Per-port PoE power sensing measures actual power being drawn, enabling more intelligent control of powered devices. The PoE MIB provides proactive visibility into power usage and allows you to set different power-level thresholds.
- **RFID tags**: Catalyst 9300 Series Switches have an embedded RFID tag that facilitates easy asset and inventory management using commercial RFID readers.
- **Blue beacon**: Catalyst 9300 Series Switches support a blue beacon LED for easy identification of the switch being accessed.

Open standards-based fabric

The Cisco Catalyst 9300 Series Switches support modern fabric technologies such as VXLAN with Border Gateway Protocol Ethernet VPN (BGP-EVPN) control plane, with open APIs. This technology provides the flexibility to build open standards-based fabrics to secure infrastructure, users, and data. This fabric architecture provides rich unicast and multicast protocol support to optimally route or bridge traffic as well as support for integrated campus services, all of which can be automated via open APIs to effectively configure and monitor the network.

Programmability

Cisco IOS XE provides open standards-based APIs such as NETCONF, RESTCONF, and gNMI to simplify provisioning and configuration, allowing network administrators to save time when provisioning new network devices and to prevent the human errors that often are a byproduct of manual configuration. Integrating ZTP with various DevOps toolkits allows network administrators to drastically reduce the time and resources needed to onboard a device to their network. The ability to collect real-time statistics through model-driven telemetry through gRPC and gNMI allows administrators to integrate with many health monitoring tools to optimize their environments and to troubleshoot and provide alerts about any potential problems.

High-performance IP routing

The Cisco Express Forwarding hardware routing architecture delivers extremely high-performance IP

routing in the Cisco Catalyst 9300 Series Switches, based on:

- IP unicast routing protocols (including static, Routing Information Protocol version 1 [RIPv1], RIPv2, RIPv6, and Open Shortest Path First [OSPF]) are supported for small network routing applications with the Network Essentials stack. Equal-cost routing facilitates Layer 3 load balancing and redundancy across the stack.
- Advanced IP unicast routing protocols (including full OSPF, Enhanced Interior Gateway Routing Protocol [EIGRP], BGPv4, and Intermediate System-to-Intermediate System version 4 [IS-ISv4]) are supported for load balancing and for constructing scalable LANs. IPv6 routing (using OSPFv3 and BGPv6) is supported in hardware for maximum performance.
- Protocol-Independent Multicast (PIM) for IP multicast routing is supported, including PIM Sparse Mode (PIM SM), and Source-Specific Multicast (SSM).
- IPv6 addressing is supported on interfaces with appropriate show commands for monitoring and troubleshooting.

Audio Video Bridging

Starting with Cisco IOS XE Software Release 16.8, the Cisco Catalyst 9300 Series supports the IEEE 802.1 AVB standard. This standard provided the means for highly reliable delivery of low-latency, time-synchronized audio and video streaming services through Layer 2 Ethernet networks. The standard also makes it easier to integrate new services and for AV equipment from different vendors to interoperate.

Benefits

- Improves quality of experience by lowering jitter and latency for time-synchronized delivery of high-quality AV.
- Provides scalability of applications across networked deployments, including expansive and complex AV infrastructure.
- Lowers Total Cost of Ownership (TCO) with reduced cabling (lowers CapEx) and no license fees (lowers OpEx).

For more details about AVB and specific models supported, see <https://www.cisco.com/go/avb>.

Multigigabit Ethernet technology

Cisco Multigigabit Ethernet technology allows you to achieve bandwidth speeds from 1 Gbps to 10 Gbps over traditional Category 5e/6 cabling or above. This technology addresses the need for exponential increases in bandwidth with the enormous growth of 802.11ac Wave 2, to be eclipsed by the growth of Wi-Fi 6 and new wireless applications without having to replace current cabling infrastructure.

Multiprotocol Label Switching

The Cisco Catalyst 9300 Series Switches support Multiprotocol Label Switching (MPLS), which combines the performance and capabilities of Layer 2 (data link layer) switching with the proven scalability of Layer 3 (network layer) routing. MPLS enables explosive growth in network utilization while providing the opportunity to differentiate services without sacrificing the existing network infrastructure. MPLS support includes:

- **MPLS Layer 3 VPN:** An MPLS VPN consists of a set of sites that are interconnected by means of an MPLS provider core network. At each customer site, one or more Customer Edge (CE) devices attach to one or more Provider Edge (PE) devices.
- **VPLS:** Virtual Private LAN Service (VPLS) enables enterprises to link together their Ethernet-based LANs from multiple sites via the infrastructure provided by their service provider.
- **EoMPLS:** Ethernet over MPLS (EoMPLS) is a category of Any Transport over MPLS (AToM) to transport Layer 2 packets over an MPLS backbone.
- **MPLS over GRE:** L3VPN over Generic Routing Encapsulation (GRE) and VPLS over GRE are supported to tunnel MPLS/VPLS packets over non-MPLS networks using GRE tunneling.

Power over Ethernet leadership

Cisco UPOE and UPOE+: PoE removes the need for wall sockets to power each PoE-enabled device and eliminates the cost of additional electrical cabling and circuits that would otherwise be necessary in IP phone and WLAN deployments. Cisco UPOE extends the IEEE PoE+ standard to double the power per port to 60 watts. This facilitates delivery of network power to a broad range of devices requiring higher power, including virtual desktop terminals, IP turrets, compact switches, building management gateways, LED lights, wireless access points, and IP phones. For even higher-powered devices such as those in smart building and IoT applications, Cisco Catalyst 9300 UPOE+ switches can deliver PoE power up to 90W and. UPOE+ ports provide data and power over a single cable to power devices like wireless access points, digital signage, security cameras, thermal cameras with pan-tilt-zoom features, LED lighting fixtures, and large display screens. UPOE+ offers reduced cabling and installation costs without need for permits, device daisy-chaining, real-time device information, centralized management and remote control, and fast, flexible device installation, enabling devices to be positioned in a practical location instead of Catalyst 9300 Series modular uplink (C9300 and C9300X SKUs) models support Cisco UPOE, PoE+, and PoE, thereby addressing the largest range of network power needs.

Catalyst 9300 Series fixed uplink (C9300L and C9300LM SKUs) models support Cisco UPOE, PoE+, and PoE.

Tables 10 through 13 show the power supply combinations required for different PoE needs.

Table 10. Power supply requirements for Catalyst 9300 Series modular uplink PoE/PoE+ models (C9300-xxP SKUs)

	24-port PoE switch	48-port PoE switch
PoE on all ports (15.4W per port)	1 PWR-C1-715WAC/PWR-C1-715WAC-P/PWR-C1-715WDC	1 PWR-C1-1100WAC/PWR-C1-1100WAC-P or 2 PWR-C1-715WAC/PWR-C1-715WAC-P/PWR-C1-715WDC
PoE+ on all ports (30W per port)	1 PWR-C1-1100WAC/PWR-C1-1100WAC-P or 2 PWR-C1-715WAC/PWR-C1-715WAC-P/PWR-C1-715WDC	2 PWR-C1-1100WAC/PWR-C1-1100WAC-P or 1 PWR-C1-1100WAC/PWR-C1-1100WAC-P and 1 PWR-C1-715WAC/PWR-C1-715WAC-P/PWR-C1-715WDC

Table 11. Power supply requirements for Catalyst 9300 Series UPOE models (C9300-xxU/UB/UXM/UN, C9300L-xxUXG-xx SKUs)

	24-port Cisco UPOE switch	48-port Cisco UPOE switch	48- and 24-port Multigigabit Cisco UPOE switch *
Cisco UPOE (60W per port) and IEEE 802.3bt Type 3 on all ports (24-port switch) or up to 30 ports (48-port switch)	1 PWR-C1-1100WAC/PWR-C1-1100WAC-P and 1 PWR-C1-715WAC/PWR-C1-715WDC	2 PWR-C1-1100WAC/PWR-C1-1100WAC-P	2 PWR-C1-1100WAC/PWR-C1-1100WAC-P

Table 12. Power supply requirements for Catalyst 9300 Series UPOE+ models (C9300-xxH SKUs)

24-port Cisco UPOE+ switch	48-port Cisco UPOE+ switch
----------------------------	----------------------------

	24-port Cisco UPOE+ switch	48-port Cisco UPOE+ switch
Cisco UPOE+ (90W per port) and IEEE 802.3bt Type 4 on 21 ports (24-port and 48-port switch)	1 PWR-C1-1100WAC/PWR-C1-1100WAC-P and 1 PWR-C1-715WAC/PWR-C1-715WAC-P/PWR-C1-715WDC	2 PWR-C1-1100WAC/PWR-C1-1100WAC-P or 2 PWR-C1-1900WAC-P

Table 13. Power supply requirements for Catalyst 9300 Series fixed uplink PoE/PoE+ models (C9300L-xxP SKUs)

	24-port PoE switch	48-port PoE switch
PoE on all ports (15.4W per port)	1 PWR-C1-715WAC-P/PWR-C1-715WDC	1 PWR-C1-1100WAC-P or 2 PWR-C1-715WAC-P
PoE+ on all ports (30W per port)	1 PWR-C1-1100WAC-P or 2 PWR-C1-715WAC-P/PWR-C1-715WDC	2 PWR-C1-1100WAC-P or 1 PWR-C1-1100WAC-P and 1 PWR-C1-715WAC-P/PWR-C1-715WDC

- **Perpetual PoE:** With Perpetual PoE, the PoE power is maintained during a switch reload. This is important for IoT endpoints such as PoE-powered lights, so that there is no disruption during switch reboot.
- **Fast PoE:** When power is restored to a switch, PoE starts delivering power to endpoints without waiting for the operating system to fully load, thereby speeding up the time for the endpoint to start up.

* C9300-48UN, C9300-24UX, and C9300-48UXM are available with PWR-C1-1100WAC-P, a Platinum-rated power supply. Platinum-rated power supplies are more efficient, lowering operating power costs.

* PWR-C1-1100WAC-UP and PWR-C1-715WAC-UP Platinum-rated power supply upgrade options are available to upgrade the default AC power supply to 1100W or 715W.

Software requirements

Cisco Catalyst and Cisco DNA Software for Access Switching **is available for the Cisco Catalyst 9300 Series**. Meraki software for cloud management is also available for certain models.

Cisco Catalyst and Cisco DNA Software for Access Switching offers comprehensive solutions for the enterprise campus and branch offices. Cisco Catalyst and Cisco DNA for Access Switching introduces a simpler and more economical way to deploy access, aggregation, and core switches across enterprise campus and branch locations.

The Cisco Catalyst and Cisco DNA Subscription for Switching offer delivers an unbound network on an open and extensible architecture to help you navigate the digital journey. This subscription offer simplifies the buying process and includes lower initiation costs and flexible terms. It includes Cisco Catalyst and Cisco DNA Advantage Software with full Cisco DNA capabilities and SD-Access, bundled with ISE Base, ISE Plus, and Secure Network Analytics.

For ordering information for Cisco Catalyst and Cisco DNA Software for the Cisco Catalyst 9300 Series, go to <https://www.cisco.com/c/en/us/products/software/one-access/switching-part-numbers.html>.

Cisco Catalyst 9300 Series Switches run on Cisco IOS XE Release 16.5.1a or later with the following exceptions. Catalyst 9300 Series 1G fiber models (C9300-xxS SKUs) are supported on Cisco IOS XE Release 16.11.1a or later. Catalyst 9300 Series fixed uplink models (C9300L SKUs) are supported on Cisco IOS XE Release 16.11.1b or later. These software releases include all the features listed earlier in the Platform Benefits section.

The Meraki software option combines the simplicity of the Meraki dashboard with power of Catalyst 9000 switching hardware. To satisfy high-bandwidth applications and the deployment of high-speed 802.11ax/Wi-Fi 6/6E access points, the Meraki software option provides Multigigabit ports, 480G stacking, and modular 10G/40G uplinks. Catalyst 9300 Series models with the Meraki software option deliver resiliency with fast stack convergence and StackPower. They provide Adaptive Policy using an over-the-wire tag that segments traffic into security groups to deliver scalable security. The Catalyst 9300 models integrated under the Meraki dashboard provide a simple, powerful solution to the most demanding wired access applications.

Catalyst 9300 Series Switches come with Adaptive Policy to provide simple and scalable security policies to segment traffic using security groups in Meraki dashboard. Security groups are created in the dashboard using natural language such as “IoT device” and “Guest.” The security policy intent (for example, Permit or Deny) is then simply provisioned between security groups, which results in the segmentation of each group’s traffic. By making security policy management intuitive and scalable relative to legacy IP address-based ACLs, Adaptive Policy empowers operators to confidently secure their network traffic independent of future network changes.

Catalyst 9300 Series Switches can be ordered directly or migrated to the Meraki software option. For model compatibility and more information, please see *Getting started: Cisco Catalyst 9300 Management with Meraki Dashboard*.

You can also refer to Meraki data sheets that provide details on the models orderable with the Meraki

software option (Catalyst C9300-M data sheet, [Catalyst C9300X-M data sheet](#), Catalyst C9300L-M data sheet) as well as supported optics and accessories.

Licensing packaging

The Cisco Catalyst 9000 family of switches introduces a new and simplified licensing package in the form of base and add-on licenses.

The perpetual licensing package includes the Network Essentials and Network Advantage licensing options that are tied to the hardware. Between them, the base licensing packages cover switching fundamentals, management automation, troubleshooting, and advanced switching features. These network licenses are perpetual.

The subscription licensing package includes the Cisco Catalyst and Cisco DNA Essentials, Cisco Catalyst and Cisco DNA Advantage, and Meraki Advanced and Enterprise options. In addition to on-box capabilities, the features available with this package provide Cisco innovations on the switch, as well as on Cisco Catalyst Center. and Meraki dashboard. For Catalyst 9300 models ordered with a Network Essentials and Network Advantage license, a Cisco Catalyst or Cisco DNA subscription license is mandatory at the time of configuration. For Catalyst 9300 models ordered with a Meraki SKU, the term license is ordered separately but is required for the switch to be recognized in Meraki dashboard. With Cisco Catalyst and Cisco DNA software licenses, customers receive embedded SWSS, which covers 24x7x365 Cisco Technical Assistance Center (TAC) support, software release updates, advanced support analytics, and designated service management. This is valid only for the Cisco Catalyst and Cisco DNA Software subscription stacks (Cisco Catalyst and Cisco DNA Essentials or Advantage).

Note: For full hardware support, including the perpetual network stack, customers will require Cisco Smart Net Total Care[®] for 24x7x365 Cisco TAC support, proactive security and product alerts, and product lifecycle management. An additional option for hardware support is Solution Support for your multivendor Cisco solution environment.

License consumption is easily determined by the package itself. While Network Essentials and Network Advantage perpetual licenses are always permanent and without an expiration date, subscription licenses have to be purchased for a 3-, 5-, or 7-year term (and hence are also known as term-based licenses). Table 14 shows the combinations of network perpetual and Cisco Catalyst and Cisco DNA Software subscription licenses that must be purchased.

Table 14. Cisco Catalyst, Cisco DNA, and network licensing combinations

**Cisco Catalyst and Cisco DNA
Essentials**

**Cisco Catalyst and Cisco DNA
Advantage**

	Cisco Catalyst and Cisco DNA Essentials	Cisco Catalyst and Cisco DNA Advantage
Network Essentials	Yes**	Yes**
Network Advantage	No*	Yes

* **At the time of Cisco Catalyst and Cisco DNA license renewal, the Cisco Catalyst and Cisco DNA Essentials license can be purchased to be used with Network Advantage.**

** **Network Advantage is inclusive of Network Essentials features.**

Managing licenses with Smart Accounts

Creating Smart Accounts by using the Cisco Smart Software Manager (SSM) enables you to manage your software licenses from a centralized website. You can set up Cisco SSM to receive daily email alerts and to be notified of expiring subscription licenses that you want to renew.

You must order a Cisco Catalyst or Cisco DNA subscription term license in order to purchase a switch with Network Essentials or Network Advantage perpetual licenses. When the license term expires, you can either renew the add-on license to continue using it or deactivate the add-on license and then reload the switch to continue operating with the base license capabilities.

Both the base and add-on licenses are also available for a 90-day evaluation period. An evaluation license is activated temporarily, without purchase. An expired evaluation license cannot be reactivated after reload.

It is required to deploy Cisco Catalyst Center just to use Cisco Catalyst, Cisco DNA, or network packages. Meraki dashboard is required to deploy a Catalyst 9300 switch with a Meraki software license.

Introduction to Smart Licensing

Cisco Smart Licensing is a flexible licensing model that provides you with an easier, faster, and more consistent way to purchase and manage software across the Cisco portfolio and across your organization. And it's secure – you control what users can access. With Smart Licensing you get:

- **Easy activation:** Smart Licensing establishes a pool of software licenses that can be used across the entire organization—no more Product Activation Keys (PAKs).
- **Unified management:** My Cisco Entitlements provides a complete view into all of your Cisco

products and services in an easy-to-use portal, so you always know what you have and what you are using.

License flexibility: Your software is not node-locked to your hardware, so you can easily use and transfer licenses as needed.

To use Smart Licensing, you must first set up a Smart Account on Cisco Software Central (software.cisco.com).

For a more detailed overview of Cisco Licensing, go to cisco.com/go/licensingguide.

Table 15. Software licenses

	Cisco Catalyst Software subscription	Cisco DNA Software subscription	Cisco Meraki Software subscription	Network stack
Packages¹	3-, 5-, or 7-year terms	3-, 5-, or 7-year terms	1-, 3-, 5-, 7-, or 10 year terms	Perpetual
Portability²	✓	✓		✓
Tiers	Advantage, Essentials	Advantage, Essentials	Advanced, Enterprise	Advantage, Essentials
Management options	Catalyst Center, Meraki dashboard monitoring and management	Catalyst Center, Meraki dashboard monitoring and management	Meraki dashboard management	Meraki dashboard CLI, WebUI
Included support	Base product-level support for hardware, software, and OS	SWSS	Product-level support for hardware, software, and OS	X

	Cisco Catalyst Software subscription	Cisco DNA Software subscription	Cisco Meraki Software subscription	Network stack
Included³ add-ons: Common ISE policy, ThousandEyes network and application assurance, Cisco Spaces	✓	✓	X	X

¹**For all new orders, subscription licenses are mandatory and must be of the same tier as network licenses.**

²**Portability within the same Catalyst 9000 series of hardware.**

³**Available only with the Advantage tier.**

There are three choices for software subscription: Cisco DNA, Cisco Catalyst, or Cisco Meraki. They provide:

- Flexible licensing models to smoothly distribute customers' software spending over time.
- Investment protection for software purchases through software services-enabled license portability.
- Access to updates, upgrades, and new technology from Cisco through Cisco Software Support Service (SWSS).
- Base product-level support for hardware, software, and Cisco IOS (Catalyst software only).
- ISE licenses included in the Advantage tier to facilitate zero-trust network security* (Catalyst software only).
- Access to end-to-end network visibility with Cisco Spaces, service assurance through Cisco ThousandEyes Network and Application Synthetics and app hosted ASAc firewall (with the Advantage license).

Manage your entire switching structure as a single, converged component. With one management system, on-premises, virtual, or in the cloud, and one policy for wired and wireless networks, it offers an efficient way to provide more secure access.

Tables 16 and 17 show the features included in the Network Essentials and Advantage packages and in the Cisco Catalyst and Cisco DNA Essentials and Advantage packages.

Table 16. Network Essentials and Advantage package features

Features	Network Essentials	Network Advantage
Switch fundamentals Layer 2, Routed Access (RIP, EIGRP Stub, OSPF - 1000 routes), PBR, PIM Stub Multicast (1000 routes)), PVLAN, VRRP, PBR, CDP, QoS, FHS, 802.1X, MACsec-128, CoPP, SXP, IP SLA Responder, SSO	✓	✓
Advanced switch capabilities and scale BGP, EIGRP, HSRP, IS-IS, BSR, MSDP, PIM-BIDIR, * IP SLA, OSPF	X	✓
Network segmentation VRF, VXLAN, LISP, Cisco TrustSec [®] , SGT, MPLS, mVPN	X	✓
Automation NETCONF, RESTCONF, gRPC, YANG, PnP Agent, ZTP/Open PnP, GuestShell (On-Box Python)	✓	✓
Telemetry and visibility Model-driven telemetry, sampled NetFlow, SPAN, RSPAN	✓	✓
High availability and resiliency Nonstop Forwarding (NSF), Graceful Insertion and Removal (GIR), Extended Fast Software Upgrade (xFSU), Software Patching (CLI based)	X	✓
IoT integration AVB, PTP, CoAP	X	✓
Security MACsec-256	X	✓

Table 17. Cisco Catalyst and Cisco DNA Essentials and Advantage package features (add a section for other software support and add Prime, ISE and Stealthwatch support).

Features	Cisco Catalyst and Cisco DNA Essentials	Cisco Catalyst and Cisco DNA Advantage
Switch features		
Optimized network deployments Cisco Catalyst Service for Bonjour	X	✓
Advanced telemetry and visibility Full Flexible NetFlow, EEM	✓	✓
Optimized telemetry and visibility ERSPAN, AVC (NBAR2), app hosting (in containers/ VMs), Wireshark	X	✓
Advanced security Encrypted Traffic Analytics (ETA), IPsec	X	✓
Cisco Catalyst Center features		
Simplified Campus Automation Simplified Campus Automation optimizes the discovery and configuration of devices in your network with a more streamlined simple and easy-to- use automation tool	✓	✓

Features	Cisco Catalyst and Cisco DNA Essentials	Cisco Catalyst and Cisco DNA Advantage
Day-0 network bring-up automation Cisco Network Plug-and-Play application, network settings, device credentials, LAN automation, host onboarding	✓	✓
Element management Discovery, inventory, topology, software image, licensing, and configuration management	✓	✓
Element management Patch management	X	✓
Basic Assurance Health dashboards – Network, Client, Application; switch and wired client health monitoring	✓	✓
Cisco ThousandEyes Network and Application Synthetics Network performance metrics, dashboarding, visibility into app and service experience, end-to-end visibility across cloud and DC applications	X	✓
App hosted Cisco ASAc firewall Stateful inspection of network traffic with Cisco Adaptive Security Virtual Appliance (ASAc) without any additional hardware	X	✓

Features	Cisco Catalyst and Cisco DNA Essentials	Cisco Catalyst and Cisco DNA Advantage
SD-Access Policy-based automation and assurance for wired and wireless	X	✓
Network assurance and analytics Global insights, trends, compliance, custom reports; switch 360, wired client 360; fabric and non-fabric insights; app health, app 360, app performance (loss, latency, jitter)	X	✓

Catalyst 9300 Series Switches can be migrated into Meraki mode (fully cloud managed). For model compatibility and more information, see Getting Started: Cisco Catalyst 9300 Management with Meraki Dashboard: https://documentation.meraki.com/MS/Deployment_Guides/Getting_started%3A_Cisco_Catalyst_9300_Management_with_Meraki_Dashboard.

Catalyst switches can also be ordered in Meraki mode by using the “-M” part numbers. For ordering information for Cisco C9300\L\X-M switches, please refer to the Meraki data sheets listing -M part numbers.

Meraki data sheets:

- Catalyst 9300-M data sheet
- [Catalyst 9300X-M data sheet](#)
- Catalyst 9300L-M data sheet
- [Catalyst C9300/X/L-M Installation Guide](#)
- SFP and Stacking Accessories for Meraki C9300/X/L-M Switches

Specifications

Dimensions, weight, acoustic, mean time between failures

The table below shows the dimensions, weights, acoustic details, and mean time between failures of all models of Cisco Catalyst 9300 Series Switches.

Table 18. Model dimensions, weight, and Mean Time Between Failures (MTBF) metrics**General specifications**

Dimensions (H x W x D) in inches			
Model	Chassis only	With default power supply	With 1100W power supply
C9300X-48HX	1.73 x 17.5 x 19	1.73 x 17.5 x 22.03	1.73 x 17.5 x 22.03
C9300X-48TX	1.73 x 17.5 x 19	1.73 x 17.5 x 20.56	1.73 x 17.5 x 22.03
C9300X-48HXN	1.73 x 17.5 x 17.57	1.73 x 17.5 x 20.63	1.73 x 17.5 x 20.63
C9300X-24HX	1.73 x 17.5 x 17.57	1.73 x 17.5 x 20.63	1.73 x 17.5 x 20.63
C9300X-12Y	1.73 x 17.5 x 16.1	1.73 x 17.5 x 17.6	1.73 x 17.5 x 19.2
C9300X-24Y	1.73 x 17.5 x 17.6	1.73 x 17.5 x 19.2	1.73 x 17.5 x 20.7
C9300-24T	1.73 x 17.5 x 16.1	1.73 x 17.5 x 17.7	1.73 x 17.5 x 19.2
C9300-24P	1.73 x 17.5 x 16.1	1.73 x 17.5 x 17.7	1.73 x 17.5 x 19.2

General specifications

C9300-24U	1.73 x 17.5 x 16.1	1.73 x 17.5 x 19.2	1.73 x 17.5 x 19.2
C9300-24UX	1.73 x 17.5 x 17.1	1.73 x 17.5 x 20.2	1.73 x 17.5 x 20.2
C9300-24UB	1.73 x 17.5 x 16.1	1.73 x 17.5 x 19.2	1.73 x 17.5 x 19.2
C9300-24UXB	1.73 x 17.5 x 17.1	1.73 x 17.5 x 20.2	1.73 x 17.5 x 20.2
C9300-24H	1.73 x 17.5 x 16.1	1.73 x 17.5 x 19.2	1.73 x 17.5 x 19.2
C9300-48T	1.73 x 17.5 x 16.1	1.73 x 17.5 x 17.7	1.73 x 17.5 x 19.2
C9300-48P	1.73 x 17.5 x 16.1	1.73 x 17.5 x 17.7	1.73 x 17.5 x 19.2
C9300-48U	1.73 x 17.5 x 16.1	1.73 x 17.5 x 19.2	1.73 x 17.5 x 19.2
C9300-48UXM	1.73 x 17.5 x 19.1	1.73 x 17.5 x 22.2	1.73 x 17.5 x 22.2
C9300-48UN	1.73 x 17.5 x 19.1	1.73 x 17.5 x 22.2	1.73 x 17.5 x 22.2

General specifications

C9300-48UB	1.73 x 17.5 x 16.1	1.73 x 17.5 x 19.2	1.73 x 17.5 x 19.2
C9300-48H	1.73 x 17.5 x 16.1	1.73 x 17.5 x 19.2	1.73 x 17.5 x 19.2
C9300-24S	1.73 X 17.5 X 17.7	1.73 X 17.5 X 19.2	1.73 X 17.5 X 20.7
C9300-48S	1.73 X 17.5 X 17.7	1.73 X 17.5 X 19.2	1.73 X 17.5 X 20.7
C9300LM-48UX-4Y	1.73'' x 17.50''x 13.03''	1.73 x 17.50 x 13.17	1.73 x 17.50 x 13.03 (w/ DC power supply)
C9300LM-48U-4Y	1.73'' x 17.50''x 13.03''	1.73 x 17.50 x 13.17	1.73 x 17.50 x 13.03 (w/ DC power supply)
C9300LM-24U-4Y	1.73'' x 17.50''x 13.03''	1.73 x 17.50 x 13.17	1.73 x 17.50 x 13.03 (w/ DC power supply)
C9300LM-48T-4Y	1.73'' x 17.50''x 10.84''	1.73 x 17.50 x 12.39	1.73 x 17.50 x 11.86 (w/ DC power supply)

General specifications

C9300L-24T-4G	1.73 X 17.5 X 16.1	1.73 X 17.5 X 17.7	1.73 X 17.5 X 19.2
C9300L-24T-4X	1.73 X 17.5 X 16.1	1.73 X 17.5 X 17.7	1.73 X 17.5 X 19.2
C9300L-48T-4G	1.73 X 17.5 X 16.1	1.73 X 17.5 X 17.7	1.73 X 17.5 X 19.2
C9300L-48T-4X	1.73 X 17.5 X 16.1	1.73 X 17.5 X 17.7	1.73 X 17.5 X 19.2
C9300L-24P-4G	1.73 X 17.5 X 16.1	1.73 X 17.5 X 17.7	1.73 X 17.5 X 19.2
C9300L-24P-4X	1.73 X 17.5 X 16.1	1.73 X 17.5 X 17.7	1.73 X 17.5 X 19.2
C9300L-48P-4G	1.73 X 17.5 X 16.1	1.73 X 17.5 X 17.7	1.73 X 17.5 X 19.2
C9300L-48P-4X	1.73 X 17.5 X 16.1	1.73 X 17.5 X 17.7	1.73 X 17.5 X 19.2

Dimensions (H x W x D) in centimeters

C9300X-48HX	4.4 x 44.5 x 48.3	4.4 x 44.5 x 56.0	4.4 x 44.5 x 56.0
C9300X-48TX	4.4 x 44.5 x 48.3	4.4 x 44.5 x 52.2	4.4 x 44.5 x 56.0

General specifications

C9300X-48HXN	4.4 x 44.5 x 44.6	4.4 x 44.5 x 52.4	4.4 x 44.5 x 52.4
C9300X-24HX	4.4 x 44.5 x 44.6	4.4 x 44.5 x 52.4	4.4 x 44.5 x 52.4
C9300X-12Y	4.4 x 44.5 x 40.9	4.4 x 44.5 x 44.7	4.4 x 44.5 x 48.8
C9300X-24Y	4.4 x 44.5 x 44.7	4.4 x 44.5 x 48.8	4.4 x 44.5 x 52.6
C9300-24T	4.4 x 44.5 x 40.9	4.4 x 44.5 x 44.9	4.4 x 44.5 x 48.8
C9300-24P	4.4 x 44.5 x 40.9	4.4 x 44.5 x 44.9	4.4 x 44.5 x 48.8
C9300-24U	4.4 x 44.5 x 40.9	4.4 x 44.5 x 48.8	4.4 x 44.5 x 48.8
C9300-24UX	4.4 x 44.5 x 43.4	4.4 x 44.5 x 51.3	4.4 x 44.5 x 51.3
C9300-24H	4.4 x 44.5 x 40.9	4.4 x 44.5 x 48.8	4.4 x 44.5 x 48.8
C9300-48T	4.4 x 44.5 x 40.9	4.4 x 44.5 x 44.9	4.4 x 44.5 x 48.8
C9300-48P	4.4 x 44.5 x 40.9	4.4 x 44.5 x 44.9	4.4 x 44.5 x 48.8
C9300-48U	4.4 x 44.5 x 40.9	4.4 x 44.5 x 48.8	4.4 x 44.5 x 48.8
C9300-48UXM	4.4 x 44.5 x 48.5	4.4 x 44.5 x 56.4	4.4 x 44.5 x 56.4
C9300-48UN	4.4 x 44.5 x 48.5	4.4 x 44.5 x 56.4	4.4 x 44.5 x 56.4

General specifications

C9300-48H	4.4 x 44.5 x 40.9	4.4 x 44.5 x 48.8	4.4 x 44.5 x 48.8
C9300-24S	4.3 x 44.4 x 44.9	4.3 x 44.4 x 48.8	4.3 x 44.4 x 52.6
C9300-48S	4.3 x 44.4 x 44.9	4.3 x 44.4 x 48.8	4.3 x 44.4 x 52.6
C9300LM-48UX-4Y	4.3 x 44.4 x 33.1	4.3 x 44.4 x 33.4	4.3 x 44.4 x 32.5 (w/ DC power supply)
C9300LM-48U-4Y	4.3 x 44.4 x 33.1	4.3 x 44.4 x 33.4	4.3 x 44.4 x 32.5 (w/ DC power supply)
C9300LM-24U-4Y	4.3 x 44.4 x 33.1	4.3 x 44.4 x 33.4	4.3 x 44.4 x 32.5 (w/ DC power supply)
C9300LM-48T-4Y	4.3 x 44.4 x 27.5	4.3 x 44.4 x 27.5	4.3 x 44.4 x 29.7 (w/ DC power supply)
C9300L-24T-4G	4.4 x 44.5 x 40.9	4.4 x 44.5 x 44.9	4.4 x 44.5 x 48.8
C9300L-24T-4X	4.4 x 44.5 x 40.9	4.4 x 44.5 x 44.9	4.4 x 44.5 x 48.8
C9300L-48T-4G	4.4 x 44.5 x 40.9	4.4 x 44.5 x 44.9	4.4 x 44.5 x 48.8
C9300L-48T-4X	4.4 x 44.5 x 40.9	4.4 x 44.5 x 44.9	4.4 x 44.5 x 48.8

General specifications

C9300L-24P-4G	4.4 x 44.5 x 40.9	4.4 x 44.5 x 44.9	4.4 x 44.5 x 48.8
C9300L-24P-4X	4.4 x 44.5 x 40.9	4.4 x 44.5 x 44.9	4.4 x 44.5 x 48.8
C9300L-48P-4G	4.4 x 44.5 x 40.9	4.4 x 44.5 x 44.9	4.4 x 44.5 x 48.8
C9300L-48P-4X	4.4 x 44.5 x 40.9	4.4 x 44.5 x 44.9	4.4 x 44.5 x 48.8
C9300L-48PF-4G	4.4 x 44.5 x 40.9	4.4 x 44.5 x 48.8	4.4 x 44.5 x 48.8
C9300L-48PF-4X	4.4 x 44.5 x 40.9	4.4 x 44.5 x 48.8	4.4 x 44.5 x 48.8
C9300L-24UXG-4X	4.4 x 44.5 x 40.9	4.4 x 44.5 x 48.8	4.4 x 44.5 x 48.8
C9300L-24UXG-2Q	4.4 x 44.5 x 40.9	4.4 x 44.5 x 48.8	4.4 x 44.5 x 48.8
C9300L-48UXG-4X	4.4 x 44.5 x 40.9	4.4 x 44.5 x 48.8	4.4 x 44.5 x 48.8
C9300L-48UXG-2Q	4.4 x 44.5 x 40.9	4.4 x 44.5 x 48.8	4.4 x 44.5 x 48.8

Weight (with default power supply)

Model	Pounds	Kilograms
C9300X-48HX	14.6	6.62
C9300X-48TX	14.6	6.62

General specifications

C9300X-48HXN	14.2	6.44
C9300X-24HX	13.8	6.25
C9300X-12Y	15.0	6.80
C9300X-24Y	16.2	7.35
C9300-24T	16.03	7.27
C9300-24P	16.33	7.4
C9300-24U	16.63	7.54
C9300-24UX	18.18	8.25
C9300-24UB	16.63	7.54
C9300-24UXB	18.18	8.25
C9300-24H	16.63	7.54
C9300-48T	16.43	7.45
C9300-48P	16.73	7.59
C9300-48U	17.03	7.72

General specifications

C9300-48UXM	20.50	9.34
C9300-48UN	20.05	9.09
C9300-48UB	17.03	7.72
C9300-48H	17.03	7.72
C9300-24S	16.84	7.64
C9300-48S	17.32	7.86
C9300LM-48UX-4Y	12	5.45
C9300LM-48U-4Y	12	5.45
C9300LM-24U-4Y	11.5	5.21
C9300LM-48T-4Y	11	4.99
C9300L-24T-4G	14.93	6.78
C9300L-24T-4X	14.93	6.78
C9300L-48T-4G	15.41	7.0
C9300L-48T-4X	15.41	7.0

General specifications

C9300L-24P-4G	14.99	6.81
C9300L-24P-4X	14.99	6.81
C9300L-48P-4G	15.46	7.03
C9300L-48P-4X	15.46	7.03
C9300L-48PF-4G	15.48	7.03
C9300L-48PF-4X	15.48	7.03
C9300L-24UXG-4X	15.73	7.13
C9300L-24UXG-2Q	16.01	7.26
C9300L-48UXG-4X	16.86	7.65
C9300L-48UXG-2Q	16.86	7.65

Mean time between failures (hours)

C9300X-48HX	185,420
C9300X-48TX	206,480
C9300X-48HXN	188,200

General specifications

C9300X-24HX	220,250
C9300X-12Y	265,650
C9300X-24Y	249,350
C9300-24T	314,790
C9300-24P	299,000
C9300-24U	238,410
C9300-24UX	214,760
C9300-24UB	354,300
C9300-24UXB	288.520
C9300-24H	238,410
C9300-48T	305,870
C9300-48P	277,770
C9300-48U	227,410
C9300-48UXM	202,160

General specifications

C9300-48UN	198,647
C9300-48UB	337,170
C9300-48H	227,410
C9300-24S	284,130
C9300-48S	281,920
C9300L-24T-4G	395,800
C9300L-24T-4X	387,700
C9300L-48T-4G	387,860
C9300L-48T-4X	380,080
C9300L-24P-4G	346,940
C9300L-24P-4X	340,710
C9300L-48P-4G	314,140
C9300L-48P-4X	309,020
C9300L-48PF-4G	303,660

General specifications

C9300L-48PF-4X	298,880
C9300L-24UXG-4X	332,640
C9300L-24UXG-2Q	291,670
C9300L-48UXG-4X	273,820
C9300L-48UXG-2Q	275,010
C9300LM-24U-4Y	357,350
C9300LM-48U-4Y	304,970
C9300LM-48T-4Y	408,710
C9300LM-48UXG-4Y	292,410
PWR-C1-350WAC-P	1,335,012 (ranges from 1.3 million to 3.1 million, depending on temperature, input voltage, and vendor)
PWR-C1-715WAC-P	1,054,881 (ranges from 1.05 million to 2.6 million, depending on temperature, input voltage, and vendor)
PWR-C1-1100WAC-P	1,217,904 (ranges from 1.2 million to 2.8 million, depending on temperature, input voltage, and vendor) (investigating an anomaly in MTBF data received from 1 Power Supply vendor – Artesyn)

General specifications**PWR-C1-1900WAC-P**

PWR-C1-715WDC	1,812,103 (-48V input at 40C and vendor Delta)
----------------------	--

PWR-C6-600WAC	1,600,060
----------------------	-----------

PWR-C6-1000WAC	1,600,060
-----------------------	-----------

PWR-C6-715WDC	1,712,103
----------------------	-----------

C9300-NM-2Q	10,778,230
--------------------	------------

C9300-NM-2Y	7,568,820
--------------------	-----------

C9300-NM-4G	8,953,570
--------------------	-----------

C9300-NM-4M	10,549,060
--------------------	------------

C9300-NM-8X	7,151,930
--------------------	-----------

C9300X-NM-8Y	
---------------------	--

C9300X-NM-2C	
---------------------	--

FAN-T2	4,521,330
---------------	-----------

Environmental ranges

General specifications

Acoustic noise

Measured per ISO 7779 and
declared per ISO 9296

Bystander positions
operating to an ambient
temperature of 25° C

With AC power supply (with 24 PoE+ ports loaded for C9300 SKUs)

- LpA: 45 dB typical, 48 dB max
- LwA: 5.6B typical, 5.9B max

With AC power supply (with half the number of PoE+ ports loaded for C9300L SKUs)

- LpA: 44 dB typical, 47 dB max
- LwA: 5.5B typical, 5.8B max

Typical: Noise emission for a typical configuration

Maximum: Statistical maximum to account for variation in production

Connectors

Table 19 shows the supported connectors for the Cisco Catalyst 9300 Series.

Table 19. Connectors

Connectors and cabling	
	• 1000BASE-T ports: RJ-45 connectors, 4-pair Cat 5E UTP cabling • Multigigabit-T ports: RJ-45 connectors, 4-pair Cat 5E, Cat 6, Cat 6A UTP cabling • 1000BASE-T SFP-based ports: RJ-45 connectors, 4-pair Cat 5E UTP cabling • SFP transceivers: LC fiber connectors (single-mode or multimode fiber) • SFP+ transceivers: LC fiber connectors (single-mode or multimode fiber) • QSFP+ transceivers: MPO and LC fiber connectors (single-mode or multimode fiber) • QSFP+ connector • SFP+ connector • Cisco StackWise stacking ports: Copper-based Cisco StackWise cabling • Cisco StackPower: Cisco proprietary power stacking cables

	• Ethernet management port: RJ-45 connectors, 4-pair Cat 5 UTP cabling • Management console port: RJ-45-to-DB9 cable for PC connections
Power connectors	• Customers can provide power to a switch by using the internal power at the back of the switch • Internal power supply connector: The internal power supply is an auto-ranging unit. It supports input voltages between 100 (115 for 1100WAC) and 240 VAC. Use the supplied AC power cord to connect the AC power connector to an AC power outlet

For the latest Cisco transceiver module compatibility information, refer to <https://www.cisco.com/c/en/us/support/interfaces-modules/transceiver-modules/products-device-support-tables-list.html>.

Management and standards support

Table 20 shows management and standards support for the Cisco Catalyst 9300 Series.

Table 20. Management and standards support*

Description	Specification
Management	BRIDGE-MIB CISCO-BRIDGE-EXT-MIB CISCO-BULK-FILE-MIB CISCO-CABLE-DIAG-MIB CISCO-CALLHOME-MIB CISCO-CEF-MIB CISCO-CIRCUIT-INTERFACE-MIB CISCO-CONFIG-COPY-MIB CISCO-CONFIG-MAN-MIB CISCO-DEVICE-LOCATION-MIB CISCO-DHCP-SNOOPING-MIB CISCO-EIGRP-MIB CISCO-EMBEDDED-EVENT-MGR-MIB CISCO-ENTITY-FRU-CONTROL-MIB CISCO-ENTITY-SENSOR-MIB CISCO-PORT-STORM-CONTROL-MIB CISCO-POWER-ETHERNET-EXT-MIB CISCO-PRIVATE-VLAN-MIB CISCO-PROCESS-MIB CISCO-PRODUCTS-MIB CISCO-RF-MIB CISCO-RTP-METRICS-MIB CISCO-RTTMON-ICMP-MIB CISCO-STACKWISE-MIB CISCO-STP-EXTENSIONS-MIB CISCO-SYSLOG-MIB CISCO-TCP-MIB

Description	Specification
	CISCO-ENTITY-VENDORTYPE-OID-MIB
	CISCO-ERR-DISABLE-MIB
	CISCO-FLASH-MIB
	CISCO-FLOW-MONITOR-MIB
	CISCO-FTP-CLIENT-MIB
	CISCO-HSRP-EXT-MIB
	CISCO-HSRP-MIB
	CISCO-IETF-BFD-MIB
	CISCO-IETF-PPVPN-MPLS-VPN-MIB
	CISCO-IETF-PW-MPLS-MIB
	CISCO-IF-EXTENSION-MIB
	CISCO-IGMP-FILTER-MIB
	CISCO-IMAGE-LICENSE-MGMT-MIB
	CISCO-IMAGE-MIB
	CISCO-IP-CBR-METRICS-MIB
	CISCO-IP-STAT-MIB
	CISCO-IP-TAP-MIB
	CISCO-IP-URPF-MIB
	CISCO-IPSEC-FLOW-MONITOR-MIB
	CISCO-IPSEC-MIB
	CISCO-IPSEC-PROVISIONING-MIB
	CISCO-IPSLA-AUTOMEASURE-MIB
	CISCO-IPSLA-ECHO-MIB
	CISCO-IPSLA-JITTER-MIB
	CISCO-L2-CONTROL-MIB
	CISCO-L2L3-INTERFACE-CONFIG-MIB
	CISCO-LAG-MIB
	CISCO-LICENSE-MGMT-MIB
	CISCO-LOCAL-AUTH-USER-MIB
	CISCO-MAC-NOTIFICATION-MIB
	CISCO-MDI-METRICS-MIB
	CISCO-MEDIA-METRICS-MIB
	CISCO-MEMORY-POOL-MIB
	CISCO-UDLD-MIB
	CISCO-VLAN-IFTABLE-RELATIONSHIP-MIB
	ENTITY-MIB
	HC-ALARM-MIB
	HC-RMON-MIB
	IEEE8023-LAG-MIB
	IF-MIB
	IP-FORWARD-MIB
	IP-MIB
	LLDP-EXT-MED-MIB
	LLDP-MIB
	MAU-MIB
	MPLS-L3VPN-STD-MIB
	MPLS-LSR-STD-MIB
	MPLS-VPN-MIB
	OLD-CISCO-CHASSIS-MIB
	OLD-CISCO-CPU-MIB
	OLD-CISCO-INTERFACES-MIB
	OLD-CISCO-IP-MIB
	OLD-CISCO-MEMORY-MIB
	OLD-CISCO-SYS-MIB
	OLD-CISCO-TCP-MIB
	OLD-CISCO-TS-MIB
	POWER-ETHERNET-MIB
	RFC1213-MIB
	RMON-MIB
	RMON2-MIB
	SMON-MIB
	SNMPv2-MIB
	SONET-MIB
	TCP-MIB

Description	Specification	
	CISCO-MPLS-LSR-EXT-STD-MIB CISCO-NBAR-PROTOCOL-DISCOVERY-MIB CISCO-NHRP-EXT-MIB CISCO-NTP-MIB CISCO-PAGP-MIB CISCO-PORT-SECURITY-MIB	UDP-MIB
Standards	IEEE 802.1s IEEE 802.1w IEEE 802.1x IEEE 802.1x-Rev IEEE 802.3ad IEEE 802.3ae IEEE 802.3af IEEE 802.3at IEEE 802.3x full duplex on 10BASE-T, 100BASE-TX, and 1000BASE-T ports IEEE 802.1D Spanning Tree Protocol IEEE 802.1p CoS prioritization IEEE 802.1Q VLAN IEEE 802.3 10BASE-T specification IEEE 802.3u 100BASE-TX specification IEEE 802.3ab 1000BASE-T specification IEEE 802.3z 1000BASE-X specification IEEE 802.3bz Multirate 2.5G/5G specification IEEE 802.3an 10G BASE-T specification	RMON I and II standards SNMPv1, v2c, and v3

Power supply specifications

Table 21 lists the power specifications for the Cisco Catalyst 9300 Series based on the kind of power supply used.

Table 21. Power specifications

Description	Specification			
	PWR- C1-1100WAC**	PWR- C1-715WAC**	PWR- C1-350WAC**	PWR- C1-715WDC
Power supply rated maximum	1100W	715W	350W	715W
Total output BTU (note: 1000 BTU/hr = 293W)	3793 BTU/hr, 1100W	2465 BTU/hr, 715W	1207 BTU/hr, 350W	2440 BTU/hr
Input-voltage range and frequency	115V to 240 VAC, 50 to 60 Hz	100 to 240 VAC, 50 to 60 Hz	100 to 240 VAC, 50 to 60 Hz	-36V to-72 VDC
Input current	12-6A	10-5A	4-2A	24-12A
Output ratings	-56V at 19.64A	-56V at 12.8A	-56V at 6.25A	-56V at 12.8A
Output holdup time	10 ms minimum at 100VAC	16.7 ms minimum at 100VAC	16.7 ms minimum at 100VAC	2 ms minimum at -48Vdc
Power-supply input receptacles	IEC 320-C16 (IEC60320-C16)	IEC 320-C16 (IEC60320-C16)	IEC 320-C14 (IEC60320-C14)	Right angle barrier style terminal block
Power cord rating	15A	15A	10A	25A@100VDC
Physical	(H x W x D):	(H x W x D):	(H x W x D):	(H x W x D):

Description	Specification			
specifications	1.58 x 3.25 x	1.58 x 3.25 x	1.58 x 3.25 x	1.58 x 3.25 x
	13.7 in	12.20 in	12.20 in	12.20 in
	Weight: 3.1 lb (1.4 kg)	Weight: 2.6 lb (1.2 kg)	Weight: 2.3 lb (1.2 kg)	Weight: 2.2 lb (1kg)

**These power supply options will not be available for purchase with the C9300 in CCW starting Q2 FY21.

Table 22. Power specifications - Platinum-rated power supplies

Description	Specification				
	*PWR-C1-1900WAC-P		*PWR-C1-1100WAC-P	*PWR-C1-715WAC-P	PWR-C1-350WAC-P
Power supply rated maximum output power	1500W with 115V	1900W with 230V	1100W	715W	350W
Total output BTU (note: 1000 BTU/hr = 293W)	5118 BTU/hr, with 115V	6483 BTU/hr, with 230V	3754 BTU/hr, 1100W	2440 BTU/hr, 715W	1194 BTU/hr, 350W
Input-voltage range and frequency	115V to 127 VAC 50 to 60 Hz	200V to 240 VAC 55 to 60 Hz	115V to 240 VAC 50 to 60 Hz	100 to 240 VAC 50 to 60 Hz	100 to 240 VAC 50 to 60 Hz
Input current	16A maximum	12A maximum	12-6A	10-5A	4-2A

Description	Specification				
Output ratings	-56V at 26.78A	-56V at 33.92A	-56V at 19.64A	-56V at 12.8A	-56V at 6.25A
Output holdup time	20 ms minimum at 100VAC	20 ms minimum at 100VAC	20 ms minimum at 100VAC	20 ms minimum at 100VAC	20 ms minimum at 100VAC
Power-supply input receptacles	IEC 320- C22	IEC 320- C22	IEC 320-C16 (IEC60320- C16)	IEC 320-C16 (IEC60320- C16)	IEC 320-C14 (IEC60320- C14)
Power cord rating	20A	16A	15A	15A	10A
Physical specifications	(H x W x D): 1.58 x 3.25 x 13.7 in Weight: xxx lb (x.x kg)		(H x W x D): 1.58 x 3.25 x 13.7 in Weight: 3.1 lb (1.4 kg)	(H x W x D): 1.58 x 3.25 x 12.20 in Weight: 2.6 lb (1.2 kg)	(H x W x D): 1.58 x 3.25 x 12.20 in Weight: 2.3 lb (1.2 kg)
Operating temperature	Normal operating temperature* and altitudes: -5° C to +45° C, up to 5000 feet (1500m) -5° C to +40° C, up to 10,000 feet (3000m) * Minimum ambient temperature for cold start is 32° F (0° C) Short-term* exceptional conditions: -5° C to +50° C, up to 5000 feet (1500m) -5° C to +45° C, up to 10,000 feet (3000m) -5° C to +45° C, at sea level with single fan failure				

Description	Specification	
	Short-term* exceptional conditions: -5° C to +55° C, at sea level -5° C to +50° C, up to 5000 feet (1500m) -5° C to +45° C, up to 10,000 feet (3000m) -5° C to +35° C, up to 15,000 feet (5000m) *Not more than following in 1-year period: 96 consecutive hours, or 360 hours total, or 15 occurrences	*Not more than following in 1-year period: 96 consecutive hours, or 360 hours total, or 15 occurrences
Storage temperature	40° to 158°F (-40° to 70° C)	-40° to 158°F (-40° to 70° C)
Relative humidity operating and nonoperating noncondensing	5% to 90% noncondensing	5% to 90% noncondensing
Altitude	10,000 ft. (3000 meters), up to 45° C	10,000 ft. (3000 meters), up to 45° C
EMI and EMC compliance	FCC Part 15 (CFR 47) Class A ICES-003 Class A EN 55032 Class A CISPR 32 Class A	FCC Part 15 (CFR 47) Class A ICES-003 Class A EN 55032 Class A CISPR 32 Class A AS/NZS 3548 Class A

Description	Specification	
	AS/NZS 3548 Class A	BSMI Class A
	BSMI Class A	(AC input models only)
	(AC input models only)	VCCI Class A
	VCCI Class A	EN 55024, EN300386,
	EN 55024, EN300386,	EN 61000-3-2, EN 61000-3-3
	EN 61000-3-2, EN	EN61000-4-2, EN61000-4-3,
	61000-3-3	EN61000-4-4, EN61000-4-5,
	EN61000-4-2,	EN61000-4-6
	EN61000-4-3,	
	EN61000-4-4,	
	EN61000-4-5,	
	EN61000-4-6	

Safety compliance		
-------------------	--	--

LED indicators	“AC OK”: Input power to the power supply is OK “PS OK”: Output power from the power supply is OK	“AC OK”: Input power to the power supply is OK “PS OK”: Output power from the power supply is OK
----------------	--	--

*PWR-C1-1900WAC-UP is available as an PSU upgrade option to 1900W primary PSU

*PWR-C1-1100WAC-UP is available as an PSU upgrade option to 1100W primary PSU

*PWR-C1-715WAC-UP is available as an PSU upgrade option to 715W primary PSU

Power consumption of standalone Catalyst 9300 Series Switches

Table 23 shows the power consumption of standalone Cisco Catalyst 9300 Series Switches based on Alliance for Telecommunications Industry Solutions (ATIS) testing using Internet Mix (IMIX) distribution stream traffic, with input voltage of 115VAC at 60 Hz and no PoE loading. The values given are the maximum possible power consumption numbers under the respective test scenarios.

Table 23. Power consumption of standalone Catalyst 9300 Series Switches (tested on IOS XE Release 16.5.1)

Measured P(W)**Half port traffic**

SKU	FEP	Uplink	Input	0.01%/ EEE	10%	30%	50%
C9300-24P	715W	Not Installed	115Vac	82.6	91.0	93.4	93.7
			230Vac	81.6	89.8	92.2	92.4
		C9300- NM-4G	115Vac	87.5	93.0	96.5	97.7
			230Vac	86.1	91.3	94.4	95.8
		C9300- NM-4M	115Vac	90.4	100.4	101.6	101.9
			230Vac	89.4	99.1	100.3	100.5
		C9300- NM-2Q	115Vac	88.1	98.6	99.5	99.6
			230Vac	87.1	97.2	98.1	98.3
		C9300- NM-8X	115Vac	90.0	99.4	101.0	101.2
			230Vac	89.0	97.9	99.8	100.0
C9300-24S	715W	C9300-	115Vac	99.40	100.30	101.50	102.10

SKU	FEP	Uplink	Measured P(W)				
			Input	Half port traffic			
				0.01%/ EEE	10%	30%	50%
		NM-4G	230Vac	98.00	98.90	99.70	100.60
		C9300- NM-2Q	115Vac	101.90	104.80	105.30	105.40
			230Vac	100.20	103.00	103.50	103.70
		C9300- NM-8X	115Vac	104.60	107.40	108.30	108.50
			230Vac	103.40	105.70	106.40	106.70
		C9300- NM-4M	115Vac	99.15	101.80	102.50	102.70
			230Vac	97.64	100.30	100.80	101.00
		C9300- NM-2Y	115Vac	101.24	104.48	104.75	104.81
			230Vac	99.17	102.36	102.63	102.85
C9300-24T	350W	Not Installed	115Vac	77.7	86.1	89.1	89.5
			230Vac	77.4	85.4	88.5	88.7

SKU	FEP	Uplink	Input	Measured P(W)			
				Half port traffic			
				0.01%/ EEE	10%	30%	50%
		C9300- NM-4G	115Vac	82.5	88.4	92.1	93.3
			230Vac	81.8	87.6	90.4	92.0
		C9300- NM-4M	115Vac	86.4	96.3	98.0	98.2
			230Vac	85.4	95.1	96.6	96.8
		C9300- NM-2Q	115Vac	84.0	94.7	95.7	95.9
			230Vac	83.2	93.6	94.4	94.6
		C9300- NM-8X	115Vac	86.3	95.6	97.5	97.8
			230Vac	85.4	94.5	96.2	96.4
C9300-24U	1100W	Not Installed	115Vac	87.4	95.9	99.0	99.2
			230Vac	85.9	94.7	97.3	97.6
		C9300-	115Vac	92.2	97.8	101.2	102.7

SKU	FEP	Uplink	Measured P(W)				
			Half port traffic				
			Input	0.01%/ EEE	10%	30%	50%
		NM-4G	230Vac	90.6	96.1	99.4	100.9
		C9300- NM-4M	115Vac	96.0	106.2	107.6	107.8
			230Vac	94.3	104.5	105.8	106.1
		C9300- NM-2Q	115Vac	93.4	103.9	104.8	105.0
			230Vac	91.8	102.0	103.0	103.3
		C9300- NM-8X	115Vac	95.8	105.4	107.3	107.6
			230Vac	94.0	103.0	105.1	105.4
		C9300-24UB	115Vac	87.4	95.9	99.0	99.2
			230Vac	85.9	94.7	97.3	97.6
			115Vac	92.2	97.8	101.2	102.7
			230Vac	90.6	96.1	99.4	100.9

SKU	FEP	Uplink	Input	Measured P(W)			
				Half port traffic			
				0.01%/ EEE	10%	30%	50%
		C9300- NM-4M	115Vac	96.0	106.2	107.6	107.8
			230Vac	94.3	104.5	105.8	106.1
		C9300- NM-2Q	115Vac	93.4	103.9	104.8	105.0
			230Vac	91.8	102.0	103.0	103.3
		C9300- NM-8X	115Vac	95.8	105.4	107.3	107.6
			230Vac	94.0	103.0	105.1	105.4
C9300-24UX	1100W	C9300- NM-8X	115Vac	188.0	195.7	196.8	197.4
			230Vac	184.4	192.2	192.9	193.5
C9300-24UXB	1100W	C9300- NM-8X	115Vac	188.0	195.7	196.8	197.4
			230Vac	184.4	192.2	192.9	193.5
C9300-24H	1100W	Not	115Vac	87.4	95.9	99.0	99.2

SKU	FEP	Uplink	Measured P(W)				
			Half port traffic				
			Input	0.01%/ EEE	10%	30%	50%
		Installed	230Vac	85.9	94.7	97.3	97.6
		C9300- NM-4G	115Vac	92.2	97.8	101.2	102.7
			230Vac	90.6	96.1	99.4	100.9
		C9300- NM-4M	115Vac	96.0	106.2	107.6	107.8
			230Vac	94.3	104.5	105.8	106.1
		C9300- NM-2Q	115Vac	93.4	103.9	104.8	105.0
			230Vac	91.8	102.0	103.0	103.3
		C9300- NM-8X	115Vac	95.8	105.4	107.3	107.6
			230Vac	94.0	103.0	105.1	105.4
C9300-48P	715W	Not Installed	115Vac	90.5	103.2	104.5	104.7
			230Vac	89.4	102.2	103.4	103.6

SKU	FEP	Uplink	Input	Measured P(W)			
				Half port traffic			
				0.01%/ EEE	10%	30%	50%
		C9300- NM-4G	115Vac	95.3	103.5	106.2	108.1
			230Vac	94.0	102.2	105.2	106.9
		C9300- NM-4M	115Vac	98.7	111.5	112.3	112.7
			230Vac	97.1	110.7	111.5	111.9
		C9300- NM-2Q	115Vac	96.9	110.1	110.7	111.0
			230Vac	95.6	109.2	109.7	110.1
		C9300- NM-8X	115Vac	100.5	113.4	114.2	114.6
			230Vac	99.4	112.8	113.5	113.9
	C9300-48S	C9300- NM-4G	115Vac	116.30	117.00	118.40	119.10
			230Vac	114.90	115.60	116.70	117.60
		C9300-	115Vac	117.70	121.30	121.80	122.40

SKU	FEP	Uplink	Input	Measured P(W)			
				Half port traffic			
				0.01%/ EEE	10%	30%	50%
		NM-2Q	230Vac	116.40	119.70	120.20	120.80
		C9300- NM-8X	115Vac	120.50	123.60	124.30	125.20
			230Vac	119.00	121.90	122.90	123.40
		C9300- NM-4M	115Vac	118.29	121.62	122.36	122.78
			230Vac	117.15	120.62	120.89	121.30
		C9300- NM-2Y	115Vac	114.30	119.20	119.70	120.30
			230Vac	112.00	118.00	118.60	118.90
		C9300-48T	115Vac	81.5	94.9	95.7	95.9
			230Vac	80.5	93.7	94.6	94.8
		C9300- NM-4G	115Vac	86.4	94.9	97.8	99.4
			230Vac	85.3	93.8	96.6	98.4

Measured P(W)							
Half port traffic							
SKU	FEP	Uplink	Input	0.01%/ EEE	10%	30%	50%
		C9300- NM-4M	115Vac	89.6	103.4	104.2	104.6
			230Vac	89.0	102.0	102.8	103.1
		C9300- NM-2Q	115Vac	88.3	102.4	102.9	103.3
			230Vac	87.3	100.9	101.4	101.8
		C9300- NM-8X	115Vac	92.1	105.2	106.1	106.5
			230Vac	91.1	103.9	104.7	105.1
C9300-48U	1100W	Not Installed	115Vac	96.0	110.2	110.9	111.2
			230Vac	94.8	108.5	109.2	109.4
		C9300- NM-4G	115Vac	97.4	105.8	109.0	110.7
			230Vac	95.4	103.9	107.4	108.7
		C9300-	115Vac	104.4	118.5	119.0	119.5

SKU	FEP	Uplink	Input	Measured P(W)			
				Half port traffic			
				0.01%/ EEE	10%	30%	50%
		NM-4M	230Vac	102.8	116.0	117.1	117.5
		C9300- NM-2Q	115Vac	102.9	117.2	117.6	118.0
			230Vac	101.2	114.9	115.5	115.9
		C9300- NM-8X	115Vac	106.7	120.4	121.1	121.5
			230Vac	105.0	118.5	119.2	119.6
		C9300-48H	115Vac	96.0	110.2	110.9	111.2
			230Vac	94.8	108.5	109.2	109.4
		C9300- NM-4G	115Vac	97.4	105.8	109.0	110.7
			230Vac	95.4	103.9	107.4	108.7
		C9300- NM-4M	115Vac	104.4	118.5	119.0	119.5
			230Vac	102.8	116.0	117.1	117.5

				Measured P(W)			
				Half port traffic			
SKU	FEP	Uplink	Input	0.01%/ EEE	10%	30%	50%
		C9300- NM-2Q	115Vac	102.9	117.2	117.6	118.0
			230Vac	101.2	114.9	115.5	115.9
		C9300- NM-8X	115Vac	106.7	120.4	121.1	121.5
			230Vac	105.0	118.5	119.2	119.6
C9300-48UB	1100W	C9300- NM-8X	115Vac	106.7	120.4	121.1	121.5
			230Vac	105.0	118.5	119.2	119.6
C9300-48UN	1100W	C9300- NM-8X	115Vac	172.9	176.7	178.7	179.8
			230Vac	171.2	174.8	176.8	178.1
C9300-48UXM	1100W	C9300- NM-8X	115Vac	236.2	241.4	246.6	247.8
			230Vac	232.2	237.4	242.5	243.7
C9300L-24P-4G	715W	Integrated	115Vac	62.33	68.39	69.42	70.19

SKU	FEP	Uplink	Input	Measured P(W)			
				Half port traffic			
				0.01%/ EEE	10%	30%	50%
			230Vac	60.91	67.07	68.18	68.91
			115Vac	62.33	68.39	69.42	70.19
			230Vac	60.91	67.07	68.18	68.91
C9300L-24P-4X	715W	Integrated	115Vac	64.32	70.97	72.60	73.02
			230Vac	64.09	69.90	71.75	72.28
			115Vac	64.32	70.97	72.60	73.02
			230Vac	64.09	69.90	71.75	72.28
C9300L-24T-4G	350W	Integrated	115Vac	57.75	63.72	64.67	65.37
			230Vac	56.63	62.65	63.60	64.28
			115Vac	57.75	63.72	64.67	65.37
			230Vac	56.63	62.65	63.60	64.28

Measured P(W)							
Half port traffic							
SKU	FEP	Uplink	Input	0.01%/ EEE	10%	30%	50%
C9300L-24T-4X	350W	Integrated	115Vac	58.69	65.61	67.13	67.54
			230Vac	57.36	64.19	65.74	65.94
			115Vac	58.69	65.61	67.13	67.54
			230Vac	57.36	64.19	65.74	65.94
C9300L-48P-4G	715W	Integrated	115Vac	69.21	77.07	78.03	78.82
			230Vac	67.90	76.03	76.95	77.76
			115Vac	69.21	77.07	78.03	78.82
			230Vac	67.90	76.03	76.95	77.76
C9300L-48P-4X	715W	Integrated	115Vac	68.05	78.83	80.51	80.97
			230Vac	66.98	77.59	79.12	79.53
			115Vac	68.05	78.83	80.51	80.97

Measured P(W)							
Half port traffic							
SKU	FEP	Uplink	Input	0.01%/ EEE	10%	30%	50%
			230Vac	66.98	77.59	79.12	79.53
C9300L-48PF-4G	1100W	Integrated	115Vac	70.41	79.73	81.33	81.58
			230Vac	68.66	77.95	78.87	79.64
C9300L-48PF-4X	1100W	Integrated	115Vac	69.68	80.51	82.08	82.50
			230Vac	68.14	78.81	80.34	80.71
C9300L-48T-4G	350W	Integrated	115Vac	60.32	69.53	70.41	71.16
			230Vac	59.75	68.45	69.31	70.05
			115Vac	60.32	69.53	70.41	71.16
			230Vac	59.75	68.45	69.31	70.05
C9300L-48T-4X	350W	Integrated	115Vac	63.28	73.75	75.38	75.85
			230Vac	61.91	72.22	73.73	74.13

Measured P(W)**Half port traffic**

SKU	FEP	Uplink	Input	0.01%/ EEE	10%	30%	50%
			115Vac	63.28	73.75	75.38	75.85
			230Vac	61.91	72.22	73.73	74.13

Measured P(W)**ATIS Testing - 100%****Half Port Traffic**

SKU	Archer FEP	Uplink	Input	0.01%/ EEE	10%	30%	50%
C9300L-48UXG-4X	1100W	Integrated	115Vac	107.79	133.06	135.05	136.8
			230Vac	105.60	130.55	132.50	134.1
C9300L-24UXG-4X	1100W	Integrated	115Vac	70.90	87.08	88.80	89.32
			230Vac	69.20	85.22	87.09	87.51
C9300L-48UXG-2Q	1100W	Integrated	115Vac	111.73	138.34	140.48	141.1

				Measured P(W)			
ATIS Testing - 100%				Half Port Traffic			
SKU	Archer FEP	Uplink	Input	0.01%/ EEE	10%	30%	50%
			230Vac	109.53	135.16	137.16	137.8
C9300L-24UXG-2Q	1100W	Integrated	115Vac	104.07	121.70	122.67	123.4
			230Vac	100.88	118.72	119.46	120.1
C9300LM-48UX-4Y	1000W	Integrated	115Vac	95.1	110.7	111.6	112.0
			230Vac	93.8	108.6	109.5	110.4
C9300LM-48U-4Y	1000W	Integrated	115Vac	83.5	96.2	96.9	97.3
			230Vac	82.3	94.9	95.5	95.9
C9300LM-48T-4Y	600W	Integrated	115Vac	76.1	88.8	89.4	89.8
			230Vac	75.2	87.4	88.0	88.3
C9300LM-24U-4Y	600W	Integrated	115Vac	77.7	84.5	86.9	87.1
			230Vac	76.1	83.3	85.8	86.0

Table 24. Power consumption of standalone 9300 Series Switches with Platinum-rated power supply (tested on Cisco IOS XE 16.8.1)

Measured P(W)**Half port traffic**

SKU	FEP	Uplink	Input	0.01%/ EEE	10%	30%	50%
C9300-24P	715W-P	C9300-NM-8X	115Vac	89.2	94.3	99	100.1
			230Vac	86.7	91.8	96.4	97.5
C9300-24T	350W-P	C9300-NM-8X	115Vac	83.1	88.2	92.9	94
			230Vac	81.9	86.8	91.3	92.4
C9300-24U	1100W-P	C9300-NM-8X	115Vac	90.5	95.9	100.5	101.6
			230Vac	88.1	93.1	97.7	98.8
C9300-24UX	1100W-P	C9300-NM-8X	115Vac	186.8	191	194.9	197.1
			230Vac	182.8	186.9	190.6	193
C9300-24H	1100W-P	C9300-NM-8X	115Vac	90.5	95.9	100.5	101.6
			230Vac	88.1	93.1	97.7	98.8
C9300-48P	715W-P	C9300-	115Vac	99.1	105.5	110.8	111.3

Measured P(W)**Half port traffic**

SKU	FEP	Uplink	Input	0.01%/ EEE	10%	30%	50%
		NM-8X					
			230Vac	97.3	103.7	108.9	109.4
C9300-48T	350W-P	C9300-NM-8X	115Vac	89.8	95.4	100.4	101.1
			230Vac	88.7	94.5	99.4	100.1
C9300-48U	1100W-P	C9300-NM-8X	115Vac	168.9	170.6	172.4	176.6
			230Vac	165.7	167.3	169.2	169.9
C9300-48UN	1100W-P	C9300-NM-8X	115Vac	172.9	176.7	178.7	179.8
			230Vac	171.2	174.8	176.8	178.1
C9300-48UXM	1100W-P	C9300-NM-8X	115Vac	241	248.1	254.8	256.4
			230Vac	237.5	243.1	249	250.3
C9300-48H	1100W-P	C9300-NM-8X	115Vac	168.9	170.6	172.4	176.6
			230Vac	165.7	167.3	169.2	169.9

Measured P(W)**Half port traffic**

SKU	FEP	Uplink	Input	0.01%/ EEE	10%	30%	50%
C9300X-12Y	715WAC-P	Not Installed	115Vac	107.6	118.1	119.7	121.4
			230Vac	105.7	112.6	113.6	114.9
C9300X-12Y	715WAC-P	C9300X-NM-8M	115Vac	121.1	127.9	129.8	131.8
			230Vac	117.3	126.9	128.6	130.4
C9300X-12Y	715WAC-P	C9300X-NM-2C	115Vac	118.6	132.1	134.2	136.2
			230Vac	116.6	129.6	131.7	133.7
C9300X-12Y	715WAC-P	C9300X-NM-8Y	115Vac	119.8	128.2	129.6	131
			230Vac	117.5	125.6	127	128.3
C9300X-24Y	715WAC-P	Not Installed	115Vac	158.2	173.8	177.4	180.9
			230Vac	163.1	164.9	167.9	170.6
C9300X-24Y	715WAC-	C9300X-	115Vac	173.4	183.3	186.6	189.3

Measured P(W)**Half port traffic**

SKU	FEP	Uplink	Input	0.01%/ EEE	10%	30%	50%
	P	NM-8M					
			230Vac	169.4	179.8	183.3	186.8
C9300X-24Y	715WAC-P	C9300X-NM-2C	115Vac	171.7	181.8	188.2	188.8
			230Vac	170.5	179.1	184.6	185.2
C9300X-24Y	715WAC-P	C9300X-NM-8Y	115Vac	172.9	182	185.4	188.8
			230Vac	170	178.9	182.3	185.6
C9300X-24Y	715WAC-P	C9300X-NM-4C	115Vac	196.6	220.4	225	229.4
			230Vac	191.3	216.5	222.6	226
C9300X-48HX	1100WAC-P	Not Installed	115Vac	217.4	222.2	224.1	223.9
			230Vac	211.4	217.8	219.5	219.8
C9300X-48HX	1100WAC-P	C9300X-NM-8M	115Vac	230.7	239.2	240.8	241
			230Vac	226.2	233.7	234.5	235.6

Measured P(W)**Half port traffic**

SKU	FEP	Uplink	Input	0.01%/ EEE	10%	30%	50%
C9300X-48HX	1100WAC- P	C9300X- NM-2C	115Vac	234.4	255.1	257.5	260.8
			230Vac	229	250	252.6	255.1
C9300X-48HX	1100WAC- P	C9300X- NM-8Y	115Vac	238.2	253.6	258.2	262.8
			230Vac	226.9	248	252.5	257
C9300X-48HX	1100WAC- P	C9300X- NM-4C	115Vac	254.2	270.1	272.9	275.5
			230Vac	248.8	259.2	262.4	263.1
C9300X-48TX	715WAC- P	Not Installed	115Vac	229.9	236.3	239.8	242.4
			230Vac	213.6	233.4	235.7	237.8
C9300X-48TX	715WAC- P	C9300X- NM-8M	115Vac	215.8	237	245.2	250.4
			230Vac	213.2	233.6	237.8	240.5
C9300X-48TX	715WAC-	C9300X-	115Vac	229.9	236.3	239.8	242.4

Measured P(W)**Half port traffic**

SKU	FEP	Uplink	Input	0.01%/ EEE	10%	30%	50%
	P	NM-2C					
			230Vac	213.6	233.4	235.7	237.8
C9300X-48TX	715WAC-P	C9300X-NM-8Y	115Vac	217.6	234.6	238.4	242.1
			230Vac	212.7	230.4	234.2	237.7
C9300X-48TX	715WAC-P	C9300X-NM-4C	115Vac	232.2	246.7	249.1	251.4
			230Vac	215.6	242.7	244.9	247.1
C9300X-24HX	1100WAC-P	Not Installed	115Vac	133.8	148.9	150.1	151.3
			230Vac	131.2	145.5	147	148.4
C9300X-24HX	1100WAC-P	C9300X-NM-8M	115Vac	148.9	166	167.2	168
			230Vac	141.6	162.5	163.5	164.5
C9300X-24HX	1100WAC-P	C9300X-NM-2C	115Vac	148.7	169.2	171.2	173.1
			230Vac	145.2	165.4	167.5	169.5

Measured P(W)**Half port traffic**

SKU	FEP	Uplink	Input	0.01%/ EEE	10%	30%	50%
C9300X-24HX	1100WAC-P	C9300X-NM-8Y	115Vac	148.8	171.9	174.4	176.6
			230Vac	145.8	168.4	170.5	172.6
C9300X-48HXN	1100WAC-P	Not Installed	115Vac	133.8	148.9	150.1	151.3
			230Vac	131.2	145.5	147	148.4
C9300X-48HXN	1100WAC-P	C9300X-NM-8M	115Vac	148.9	166	167.2	168
			230Vac	141.6	162.5	163.5	164.5
C9300X-48HXN	1100WAC-P	C9300X-NM-2C	115Vac	148.7	169.2	171.2	173.1
			230Vac	145.2	165.4	167.5	169.5
C9300X-48HXN	1100WAC-P	C9300X-NM-8Y	115Vac	186.8	198.2	202.9	205.6
			230Vac	175.3	186.4	190.5	193.3

ATIS Testing -100%**Measured P(W)**

Half port traffic

SKU	Archer FEP	Uplink	Input	0.01%/ EEE	10%	30%	50%	100%
C9300-48H	1900W	C9300- NM-4G	115Vac	91.15	96.80	98.07	69.60	99.11
			230Vac	90.84	95.57	96.73	97.22	97.71
C9300-48H	1900W	C9300- NM-2Q	115Vac	93.15	100.87	101.21	101.56	102.41
			230Vac	92.27	99.91	100.35	100.64	101.11
C9300-48H	1900W	C9300- NM-8X	115Vac	94.48	102.47	102.94	103.46	104.41
			230Vac	94.02	101.23	101.69	102.10	103.01
C9300-48H	1900W	C9300- NM-4M	115Vac	94.02	101.47	102.50	102.61	103.41
			230Vac	93.08	100.78	101.16	101.45	102.11
C9300-48H	1900W	C9300- NM-2Y	115Vac	93.40	101.26	101.70	102.03	103.01
			230Vac	92.57	100.14	100.55	100.95	101.11
C9300-48H	1900W	Not Installed	115Vac	85.65	92.17	93.35	93.63	94.11
			230Vac	84.89	91.33	92.45	92.68	93.11

C9300-24H	1900W	Not Installed	115Vac	80.63	84.52	85.17	85.40	85.61
			230Vac	79.55	83.21	84.70	84.91	85.21
C9300-24H	1900W	C9300-NM-4G	115Vac	86.38	88.78	89.98	90.51	91.01
			230Vac	85.98	88.27	89.66	90.6	90.71
C9300-24H	1900W	C9300-NM-2Q	115Vac	87.16	93.14	93.45	93.62	94.11
			230Vac	86.66	92.16	92.53	92.8	93.31
C9300-24H	1900W	C9300-NM-8X	115Vac	88.85	93.82	94.89	95.08	95.61
			230Vac	88.10	92.69	93.80	94.12	94.71
C9300-24H	1900W	C9300-NM-4M	115Vac	88.57	93.90	94.22	94.51	96.01
			230Vac	88.24	93.10	93.33	93.55	94.11
C9300-24H	1900W	C9300-NM-4M	115Vac	87.81	94.47	94.73	94.79	95.21
			230Vac	87.26	92.59	92.86	93.13	93.91

*ENERGY STAR[®] certified model.

Safety and compliance

Table 25 lists the safety and compliance information for the Cisco Catalyst 9300 Series.

Table 25. Safety and compliance information

Description	Specification
Safety certifications	• UL 60950-1 • CAN/CSA-C222.2 No. 60950-1 • EN 60950-1 • IEC 60950-1 • AS/NZS 60950.1 • IEEE 802.3
Electromagnetic compatibility certifications	• 47 CFR Part 15 • EN 300 386 V1.6.1 • EN 55032 Class A • CISPR 32 Class A • EN61000-3-2 • EN61000-3-3 • ICES-003 Class A • TCVN 7189 Class A • V-3 Class A • CISPR 35 • EN 300 386 • EN 55035 • TCVN 7317 • V-2/2015.04 • V-3/2015.04 • CNS13438 • KN32 • KN35 Additional certifications for C9300L SKUs:

Description	Specification
	• QCVN 118:2018/BTTTT • VCCI-CISPR 32 Class A
Environmental	Reduction of Hazardous Substances (ROHS) 5

Ordering information

Table 26 lists ordering information for the Cisco Catalyst 9300 Series. To place an order, visit the Cisco Ordering homepage at https://www.cisco.com/en/US/ordering/or13/or8/order_customer_help_how_to_order_listing.html.

Table 26. Ordering information

Switches

Product number	Product description
C9300X-48HX-E	Catalyst 9300 48-port 10G/mGig copper with modular uplink, UPOE+, Network Essentials
C9300X-48HX-A	Catalyst 9300 48-port 10G/mGig copper with modular uplink, UPOE+, Network Advantage
C9300X-48HX-M	Catalyst 9300 48-port 10G/mGig copper with modular uplink, Meraki Advanced or Enterprise
C9300X-48TX-E	Catalyst 9300 48-port 10G/mGig copper with modular uplink, data only, Network Essentials

Switches

Product number	Product description
----------------	---------------------

C9300X-48TX-A	Catalyst 9300 48-port 10G/mGig copper with modular uplink, data only, Network Advantage
----------------------	---

C9300X-48TX-M	Catalyst 9300 48-port 10G/mGig copper with modular uplink, data only, Meraki Advanced or Enterprise
----------------------	---

C9300X-48HXN-E	Catalyst 9300 40-port 5G/mGig, 8-port 10G copper with modular uplink, UPOE+, Network Essentials
-----------------------	---

C9300X-48HXN-A	Catalyst 9300 40-port 5G/mGig, 8-port 10G copper with modular uplink, UPOE+, Network Advantage
-----------------------	--

C9300X-48HXN-M	Catalyst 9300 40-port 5G/mGig, 8-port 10G copper with modular uplink, UPOE+, Meraki Advanced or Enterprise
-----------------------	--

C9300X-24HX-E	Catalyst 9300 24-port 10G/mGig copper with modular uplink, UPOE+, Network Essentials
----------------------	--

C9300X-24HX-A	Catalyst 9300 24-port 10G/mGig copper with modular uplink, UPOE+, Network Advantage
----------------------	---

C9300X-24HX-M	Catalyst 9300 24-port 10G/mGig copper with modular uplink, UPOE+, Meraki Advanced or Enterprise
----------------------	---

C9300X-12Y-E	Catalyst 9300 12-port 25G/10G/1G SFP28 with modular uplinks, Network Essentials
---------------------	---

Switches

Product number	Product description
----------------	---------------------

C9300X-12Y-A	Catalyst 9300 12-port 25G/10G/1G SFP28 with modular uplinks, Network Advantage
---------------------	--

C9300X-12Y-M	Catalyst 9300 12-port 25G/10G/1G SFP28 with modular uplinks, Meraki Advanced or Enterprise
---------------------	--

C9300X-24Y-E	Catalyst 9300 24-port 25G/10G/1G SFP28 with modular uplinks, Network Essentials
---------------------	---

C9300X-24Y-A	Catalyst 9300 24-port 25G/10G/1G SFP28 with modular uplinks, Network Advantage
---------------------	--

C9300X-24Y-M	Catalyst 9300 24-port 25G/10G/1G SFP28 with modular uplinks, Meraki Advanced or Enterprise
---------------------	--

C9300-24T-E	Catalyst 9300 24-port 1G copper with modular uplinks, data only, Network Essentials
--------------------	---

C9300-24T-A	Catalyst 9300 24-port 1G copper with modular uplinks, data only, Network Advantage
--------------------	--

C9300-24T-M	Catalyst 9300 24-port 1G copper with modular uplinks, data only, Meraki Advanced or Enterprise
--------------------	--

C9300-24P-E	Catalyst 9300 24-port 1G copper with modular uplinks, PoE+, Network Essentials
--------------------	--

Switches

Product number

Product description

C9300-24P-A

Catalyst 9300 24-port 1G copper with modular uplinks, PoE+, Network Advantage

C9300-24P-M

Catalyst 9300 24-port 1G copper with modular uplinks, PoE+, Meraki Advanced or Enterprise

C9300-24U-E

Catalyst 9300 24-port 1G copper with modular uplinks, UPOE, Network Essentials

C9300-24U-A

Catalyst 9300 24-port 1G copper with modular uplinks, UPOE, Network Advantage

C9300-24U-M

Catalyst 9300 24-port 1G copper with modular uplinks, UPOE, Meraki Advanced or Enterprise

C9300-24UB-E

Catalyst 9300 higher scale 24-port 1G copper with modular uplinks, UPOE, Network Essentials

C9300-24UB-A

Catalyst 9300 higher scale 24-port 1G copper with modular uplinks, UPOE, Network Advantage

C9300-24U-E-UL

Catalyst 9300 24-port 1G copper with modular uplinks, UPOE, Network Advantage
(Compatible with UL1069 Standard*)

C9300-24U-A-UL

Catalyst 9300 24-port 1G copper with modular uplinks, UPOE, Network Advantage
(Compatible with UL1069 Standard*)

Switches

Product number	Product description
----------------	---------------------

C9300-24H-E	Catalyst 9300 24-port 1G copper with modular uplinks, UPOE+, Network Essentials
--------------------	---

C9300-24H-A	Catalyst 9300 24-port 1G copper with modular uplinks, UPOE+, Network Advantage
--------------------	--

C9300-24UX-E	Catalyst 9300 24-port 10G/mGig copper with modular uplink, UPOE, Network Essentials
---------------------	---

C9300-24UX-A	Catalyst 9300 24-port 10G/mGig copper with modular uplink, UPOE, Network Advantage
---------------------	--

C9300-24UX-M	Catalyst 9300 24-port 10G/mGig copper with modular uplinks, UPOE, Meraki Advanced or Enterprise
---------------------	---

C9300-24UXB-E	Catalyst 9300 higher scale 24-port 10G/mGig copper with modular uplink, UPOE, Network Essentials
----------------------	--

C9300-24UXB-A	Catalyst 9300 higher scale 24-port 10G/mGig copper with modular uplink, UPOE, Network Advantage
----------------------	---

C9300-48T-E	Catalyst 9300 48-port 1G copper with modular uplinks, data only, Network Essentials
--------------------	---

C9300-48T-A	Catalyst 9300 48-port 1G copper with modular uplinks, data only, Network Advantage
--------------------	--

Switches

Product number	Product description
C9300-48T-M	Catalyst 9300 48-port 1G copper with modular uplinks, data only, Meraki Advanced or Enterprise
C9300-48P-E	Catalyst 9300 48-port 1G copper with modular uplinks, PoE+, Network Essentials
C9300-48P-A	Catalyst 9300 48-port 1G copper with modular uplinks, PoE+, Network Advantage
C9300-48P-M	Catalyst 9300 48-port 1G copper with modular uplinks, PoE+, Meraki Advanced or Enterprise
C9300-48U-E	Catalyst 9300 48-port 1G copper with modular uplinks, UPOE, Network Essentials
C9300-48U-A	Catalyst 9300 48-port 1G copper with modular uplinks, UPOE, Network Advantage
C9300-48U-M	Catalyst 9300 48-port 1G copper with modular uplinks, UPOE, Meraki Advanced or Enterprise
C9300-48UB-E	Catalyst 9300 higher scale 48-port 1G copper with modular uplinks, UPOE, Network Essentials
C9300-48UB-A	Catalyst 9300 higher scale 48-port 1G copper with modular uplinks, UPOE, Network Advantage

Switches

Product number	Product description
C9300-48U-E-UL	Catalyst 9300 48-port 1G copper with modular uplinks, UPOE, Network Essentials (Compatible with UL1069 Standard*)
C9300-48U-A-UL	Catalyst 9300 48-port 1G copper with modular uplinks, UPOE, Network Advantage (Compatible with UL1069 Standard*)
C9300-48H-E	Catalyst 9300 48-port 1G copper with modular uplinks, UPOE+, Network Essentials
C9300-48H-A	Catalyst 9300 48-port 1G copper with modular uplinks, UPOE+, Network Advantage
C9300-48UXM-E	Catalyst 9300 48-port 2.5G (12 10G/mGig) copper with modular uplinks, UPOE, Network Essentials
C9300-48UXM-A	Catalyst 9300 48-port 2.5G (12 10G/mGig) copper with modular uplinks, UPOE, Network Advantage
C9300-48UXM-M	Catalyst 9300 48-port 2.5G (12 10G/mGig) copper with modular uplinks, UPOE, Meraki Advanced or Enterprise
C9300-48UN-E	Catalyst 9300 48-port 5G copper with modular uplinks, UPOE, Network Essentials
C9300-48UN-A	Catalyst 9300 48-port 5G copper with modular uplinks, UPOE, Network Advantage

Switches

Product number	Product description
C9300-48UN-M	Catalyst 9300 48-port 5G copper with modular uplinks, UPOE, Meraki Advanced or Enterprise
C9300-24S-E	Catalyst 9300 24-port 1G SFP with modular uplinks, Network Essentials
C9300-24S-A	Catalyst 9300 24-port 1G SFP with modular uplinks, Network Advantage
C9300-24S-M	Cisco Catalyst 9300 24-port 1G SFP, modular uplinks, Meraki Advanced or Enterprise
C9300-48S-E	Catalyst 9300 48-port 1G SFP with modular uplinks, Network Essentials
C9300-48S-A	Catalyst 9300 48-port 1G SFP with modular uplinks, Network Advantage
C9300-48S-M	Catalyst 9300 48-port 1G SFP with modular uplinks, Meraki Advanced or Enterprise
C9300L-24T-4G-E	Catalyst 9300 24-port 1G copper, with fixed 4x1G SFP uplinks, data only, Network Essentials
C9300L-24T-4G-A	Catalyst 9300 24-port 1G copper, with fixed 4x1G SFP uplinks, data only, Network Advantage
C9300L-24P-4G-E	Catalyst 9300 24-port 1G copper, with fixed 4x1G SFP uplinks, PoE+, Network Essentials

Switches

Product number	Product description
C9300L-24P-4G-A	Catalyst 9300 24-port 1G copper, with fixed 4x1G SFP uplinks, PoE+, Network Advantage
C9300L-48T-4G-E	Catalyst 9300 48-port 1G copper, with fixed 4x1G SFP uplinks, data only, Network Essentials
C9300L-48T-4G-A	Catalyst 9300 48-port 1G copper, with fixed 4x1G SFP uplinks, data only, Network Advantage
C9300L-48P-4G-E	Catalyst 9300 48-port 1G copper, with fixed 4x1G SFP uplinks, PoE+, Network Essentials
C9300L-48P-4G-A	Catalyst 9300 48-port 1G copper with fixed 4x1G SFP uplinks, PoE+, Network Advantage
C9300L-48PF-4G-E	Catalyst 9300 48-port 1G copper with fixed 4x1G SFP uplinks, PoE+, Network Essentials
C9300L-48PF-4G-A	Catalyst 9300 48-port 1G copper with fixed 4x1G SFP uplinks, PoE+, Network Advantage
C9300L-24T-4X-E	Catalyst 9300 24-port 1G copper with fixed 4x10G/1G SFP+ uplinks, data only, Network Essentials
C9300L-24T-4X-A	Catalyst 9300 24-port 1G copper with fixed 4x10G/1G SFP+ uplinks, data only, Network Advantage

Switches

Product number

Product description

C9300L-24T-4X-M

Catalyst 9300 24-port 1G copper with fixed 4x10G/1G SFP+ uplinks, data only, Meraki Advanced or Enterprise

C9300L-24P-4X-E

Catalyst 9300 24-port 1G copper with fixed 4x10G/1G SFP+ uplinks, PoE+, Network Essentials

C9300L-24P-4X-A

Catalyst 9300 24-port 1G copper with fixed 4x10G/1G SFP+ uplinks, PoE+, Network Advantage

C9300L-24P-4X-M

Catalyst 9300 24-port 1G copper with fixed 4x10G/1G SFP+ uplinks, PoE+, Meraki Advanced or Enterprise

C9300L-24UXG-4X-E

Catalyst 9300 24-port 8XmGig (100M/1G/2.5G/5G/10G) + 16x 10M/100M/1G copper with fixed 4x10G/1G SFP+ uplinks, UPOE, Network Essentials

C9300L-24UXG-4X-A

Catalyst 9300 24-port 8XmGig (100M/1G/2.5G/5G/10G) + 16x 10M/100M/1G copper with fixed 4x10G/1G SFP+ uplinks, UPOE, Network Advantage

C9300L-24UXG-4X-M

Catalyst 9300 24-port 8XmGig (100M/1G/2.5G/5G/10G) + 16x 10M/100M/1G copper with fixed 4x10G/1G SFP+ uplinks, UPOE, Meraki Advanced or Enterprise

C9300L-48T-4X-E

Catalyst 9300 48-port 1G copper with fixed 4x10G/1G SFP+ uplinks, data only, Network Essentials

Switches

Product number	Product description
C9300L-48T-4X-A	Catalyst 9300 48-port 1G copper with fixed 4x10G/1G SFP+ uplinks, data only, Network Advantage
C9300L-48T-4X-M	Catalyst 9300 48-port 1G copper with fixed 4x10G/1G SFP+ uplinks, data only, Meraki Advanced or Enterprise
C9300L-48P-4X-E	Catalyst 9300 48-port 1G copper with fixed 4x10G/1G SFP+ uplinks, PoE+, Network Essentials
C9300L-48P-4X-A	Catalyst 9300 48-port 1G copper with fixed 4x10G/1G SFP+ uplinks, PoE+, Network Advantage
C9300L-48P-4X-M	Catalyst 9300 48-port 1G copper with fixed 4x10G/1G SFP+ uplinks, PoE+, Meraki Advanced or Enterprise
C9300L-48PF-4X-E	Catalyst 9300 48-port 1G copper with fixed 4x10G/1G SFP+ uplinks, full PoE+, Network Essentials
C9300L-48PF-4X-A	Catalyst 9300 48-port 1G copper with fixed 4x10G/1G SFP+ uplinks, full PoE+, Network Advantage
C9300L-48PF-4X-M	Catalyst 9300 48-port 1G copper with fixed 4x10G/1G SFP+ uplinks, full PoE+, Meraki Advanced or Enterprise
C9300L-48UXG-4X-E	Catalyst 9300 48-port fixed uplinks UPOE, 12x mGig (100M/1G/2.5G/5G/10G) + 36x 10M/100M/1G copper, 4x 10G uplinks, Network Essentials

Switches

Product number	Product description
C9300L-48UXG-4X-A	Catalyst 9300 48-port 12x mGig (100M/1G/2.5G/5G/10G) + 36x 10M/100M/1G copper with fixed 4x 10G/1G SFP+ uplinks, UPOE, Network Advantage
C9300L-48UXG-4X-M	Catalyst 9300 48-port 12x mGig (100M/1G/2.5G/5G/10G) + 36x 10M/100M/1G copper with fixed 4x 10G/1G SFP+ uplinks, UPOE, Meraki Advanced or Enterprise
C9300L-24UXG-2Q-E	Catalyst 9300 24-port 8x mGig (100M/1G/2.5G/5G/10G) + 16x 10M/100M/1G copper with fixed 2x 40G QSFP uplinks, UPOE, Network Essentials
C9300L-24UXG-2Q-A	Catalyst 9300 24-port 8x mGig (100M/1G/2.5G/5G/10G) + 16x 10M/100M/1G copper with fixed 2x 40G QSFP uplinks, UPOE, Network Advantage
C9300L-48UXG-2Q-E	Catalyst 9300 48-port 12x mGig (100M/1G/2.5G/5G/10G) + 36x 10M/100M/1G copper with fixed 2x 40G QSFP uplinks, UPOE, Network Essentials
C9300L-48UXG-2Q-A	Catalyst 9300 48-port 12x mGig (100M/1G/2.5G/5G/10G) + 36x 10M/100M/1G copper with fixed 2x 40G QSFP uplinks, UPOE, Network Advantage
C9300LM-48UX-4Y-E	Catalyst 9300 mini 48-port UPOE, 8-port 10G Multigigabit copper, 40-port 1G, 4x 25G uplinks, Network Essentials
C9300LM-48UX-4Y-A	Catalyst 9300 mini 48-port UPOE, 8-port 10G Multigigabit copper, 40-port 1G, 4x 25G uplinks, Network Advantage

Switches

Product number	Product description
----------------	---------------------

C9300LM-48U-4Y-E	Catalyst 9300 mini 48-port 1G copper, UPOE, 4x 25G uplinks, Network Essentials
-------------------------	--

C9300LM-48U-4Y-A	Catalyst 9300 mini 48-port 1G copper, UPOE, 4x 25G uplinks, Network Advantage
-------------------------	---

C9300LM-48T-4Y-E	Catalyst 9300 mini 48-port 1G copper, data, 4x 25G uplinks, Network Essentials
-------------------------	--

C9300LM-48T-4Y-A	Catalyst 9300 mini 48-port 1G copper, data, 4x 25G uplinks, Network Advantage
-------------------------	---

C9300LM-24U-4Y-E	Catalyst 9300 mini 24-port 1G copper, UPOE, 4x 25G uplinks, Network Essentials
-------------------------	--

C9300LM-24U-4Y-A	Catalyst 9300 mini 24-port 1G copper, UPOE, 4x 25G uplinks, Network Advantage
-------------------------	---

Network modules

Product number	Product description
----------------	---------------------

C9300X-NM-8M	Catalyst 9300X 8 x 10G/mGig copper Network Module
---------------------	---

C9300X-NM-8M=	Catalyst 9300X 8 x 10G/mGig copper Network Module, spare
----------------------	--

Network modules**Product number Product description**

C9300X-NM-8Y Catalyst 9300X 8 x 25G/10G/1G multi-rate SFP Network Module

C9300X-NM-8Y= Catalyst 9300X 8 x 25G/10G/1G multi-rate SFP Network Module, spare

C9300X-NM-2C Catalyst 9300X 2 x 100G/40G dual rate QSFP Network Module

C9300X-NM-2C= Catalyst 9300X 2 x 100G/40G dual rate QSFP Network Module, spare

C9300X-NM-4C Catalyst 9300X 4 x 100G/40G dual rate QSFP Network Module

C9300X-NM-4C= Catalyst 9300X 4 x 100G/40G dual rate QSFP Network Module, spare

C9300-NM-4G Catalyst 9300 4 x 1GE SFP Network Module

C9300-NM-4G= Catalyst 9300 4 x 1GE SFP Network Module, spare

C9300-NM-8X Catalyst 9300 8 x 10G/1G SFP+ Network Module

C9300-NM-8X= Catalyst 9300 8 x 10G/1G SFP+ Network Module, spare

C9300-NM-2Q Catalyst 9300 2 x 40GE QSFP Network Module

C9300-NM-2Q= Catalyst 9300 2 x 40GE QSFP Network Module, spare

C9300-NM-2Y Catalyst 9300 2 x 25G/10G/1G SFP28 Network Module

Network modules**Product number Product description**

C9300-NM-2Y=	Catalyst 9300 2 x 25G/10G/1G SFP28 Network Module, spare
---------------------	--

C9300-NM-4M	Catalyst 9300 4 x 10G/mGig copper Network Module
--------------------	--

C9300-NM-4M=	Catalyst 9300 4 x 10G/mGig copper Network Module, spare
---------------------	---

NM-BLANK-T1=	Cisco Catalyst Type 1 Network Module Blank, spare
---------------------	---

Storage Module**Product number Product description**

SSD-120G	Cisco pluggable USB3.0 120G SSD storage
-----------------	---

SSD-120G=	Cisco pluggable USB3.0 120G SSD storage, spare
------------------	--

SSD-240G	Cisco pluggable USB3.0 240G SSD storage
-----------------	---

SSD-240G=	Cisco pluggable USB3.0 240G SSD storage, spare
------------------	--

Software licenses for C9300 SKUs

Product number	Product description
C9300-DNX-E-24-3Y	C9300 Cisco Catalyst Essentials, 24-port, 3 Year Term license
C9300-DNX-E-24-5Y	C9300 Cisco Catalyst Essentials, 24-port, 5 Year Term license
C9300-DNX-E-24-7Y	C9300 Cisco Catalyst Essentials, 24-port, 7 Year Term license
C9300-DNX-A-24-3Y	C9300 Cisco Catalyst Advantage, 24-port, 3 Year Term license
C9300-DNX-A-24-5Y	C9300 Cisco Catalyst Advantage, 24-port, 5 Year Term license
C9300-DNX-A-24-7Y	C9300 Cisco Catalyst Advantage, 24-port, 7 Year Term license
C9300-DNX-E-48-3Y	C9300 Cisco Catalyst Essentials, 48-port, 3 Year Term license
C9300-DNX-E-48-5Y	C9300 Cisco Catalyst Essentials, 48-port, 5 Year Term license
C9300-DNX-E-48-7Y	C9300 Cisco Catalyst Essentials, 48-port, 7 Year Term license
C9300-DNX-A-48-3Y	C9300 Cisco Catalyst Advantage, 48-port, 3 Year Term license

C9300-DNX-A-48-5Y	C9300 Cisco Catalyst Advantage, 48-port, 5 Year Term license
C9300-DNX-A-48-7Y	C9300 Cisco Catalyst Advantage, 48-port, 7 Year Term license
C9300-DNX-E-24S-3Y	C9300 1G Fiber Cisco Catalyst Essentials, 24-port, 3 Year Term license
C9300-DNX-E-24S-5Y	C9300 1G Fiber Cisco Catalyst Essentials, 24-port, 5 Year Term license
C9300-DNX-E-24S-7Y	C9300 1G Fiber Cisco Catalyst Essentials, 24-port, 7 Year Term license
C9300-DNX-A-24S-3Y	C9300 1G Fiber Cisco Catalyst Advantage, 24-port, 3 Year Term license
C9300-DNX-A-24S-5Y	C9300 1G Fiber Cisco Catalyst Advantage, 24-port, 5 Year Term license
C9300-DNX-A-24S-7Y	C9300 1G Fiber Cisco Catalyst Advantage, 24-port, 7 Year Term license
C9300-DNX-E-48S-3Y	C9300 1G Fiber Cisco Catalyst Essentials, 48-port, 3 Year Term license
C9300-DNX-E-48S-5Y	C9300 1G Fiber Cisco Catalyst Essentials, 48-port, 5 Year Term license
C9300-DNX-E-48S-7Y	C9300 1G Fiber Cisco Catalyst Essentials, 48-port, 7 Year Term license

C9300-DNX-A-48S-3Y	C9300 1G Fiber Cisco Catalyst Advantage, 48-port, 3 Year Term license
C9300-DNX-A-48S-5Y	C9300 1G Fiber Cisco Catalyst Advantage, 48-port, 5 Year Term license
C9300-DNX-A-48S-7Y	C9300 1G Fiber Cisco Catalyst Advantage, 48-port, 7 Year Term license
C9300-DNA-L-E-3Y	C9300 Cisco DNA Essentials license, for 12Y, 24Y SKUs, 3 Year Term license
C9300-DNA-L-E-5Y	C9300 Cisco DNA Essentials license, for 12Y, 24Y SKUs, 5 Year Term license
C9300-DNA-L-E-7Y	C9300 Cisco DNA Essentials license, for 12Y, 24Y SKUs, 7 Year Term license
C9300-DNA-L-A-3Y	C9300 Cisco DNA Advantage license, for 12Y, 24Y SKUs, 3 Year Term license
C9300-DNA-L-A-5Y	C9300 Cisco DNA Advantage license, for 12Y, 24Y SKUs, 5 Year Term license
C9300-DNA-L-A-7Y	C9300 Cisco DNA Advantage license, for 12Y, 24Y SKUs, 7 Year Term license
C9300-LIC=	Electronic Cisco DNA Upgrade License for C9300 switches. Note: when upgrading from Cisco DNA Essentials to Cisco DNA Advantage, Network Essentials is also upgraded to Network Advantage

LIC- C9300-24A-1Y	C9300 Cisco Meraki Advanced Software license, 24-port, 1 Year Term license
LIC- C9300-24A-3Y	C9300 Cisco Meraki Advanced Software license, 24-port, 3 Year Term license
LIC- C9300-24A-5Y	C9300 Cisco Meraki Advanced Software license, 24-port, 5 Year Term license
LIC- C9300-24A-7Y	C9300 Cisco Meraki Advanced Software license, 24-port, 7 Year Term license
LIC- C9300-24A-10Y	C9300 Cisco Meraki Advanced Software license, 24-port, 10 Year Term license
LIC- C9300-24E-1Y	C9300 Cisco Meraki Enterprise Software license, 24-port, 1 Year Term license
LIC- C9300-24E-3Y	C9300 Cisco Meraki Enterprise Software license, 24-port, 3 Year Term license
LIC- C9300-24E-5Y	C9300 Cisco Meraki Enterprise Software license, 24-port, 5 Year Term license
LIC- C9300-24E-7Y	C9300 Cisco Meraki Enterprise Software license, 24-port, 7 Year Term license
LIC- C9300-24E-10Y	C9300 Cisco Meraki Enterprise Software license, 24-port, 10 Year Term license
LIC- C9300-48A-1Y	C9300 Cisco Meraki Advanced Software license, 48-port, 1 Year Term license

LIC- C9300-48A-3Y	C9300 Cisco Meraki Advanced Software license, 48-port, 3 Year Term license
LIC- C9300-48A-5Y	C9300 Cisco Meraki Advanced Software license, 48-port, 5 Year Term license
LIC- C9300-48A-7Y	C9300 Cisco Meraki Advanced Software license, 48-port, 7 Year Term license
LIC- C9300-48A-10Y	C9300 Cisco Meraki Advanced Software license, 48-port, 10 Year Term license
LIC- C9300-48E-1Y	C9300 Cisco Meraki Enterprise Software license, 48-port, 1 Year Term license
LIC- C9300-48E-3Y	C9300 Cisco Meraki Enterprise Software license, 48-port, 3 Year Term license
LIC- C9300-48E-5Y	C9300 Cisco Meraki Enterprise Software license, 48-port, 5 Year Term license
LIC- C9300-48E-7Y	C9300 Cisco Meraki Enterprise Software license, 48-port, 7 Year Term license
LIC- C9300-48E-10Y	C9300 Cisco Meraki Enterprise Software license, 48-port, 10 Year Term license

Software licenses for C9300L SKUs

Product number	Product description
C9300L-DNX-E-24-3Y	C9300L Cisco Catalyst Essentials, 24-port, 3 Year Term license
C9300L-DNX-E-24-5Y	C9300L Cisco Catalyst Essentials, 24-port, 5 Year Term license
C9300L-DNX-E-24-7Y	C9300L Cisco Catalyst Essentials, 24-port, 7 Year Term license
C9300L-DNX-A-24-3Y	C9300L Cisco Catalyst Advantage, 24-port, 3 Year Term license
C9300L-DNX-A-24-5Y	C9300L Cisco Catalyst Advantage, 24-port, 5 Year Term license
C9300L-DNX-A-24-7Y	C9300L Cisco Catalyst Advantage, 24-port, 7 Year Term license
C9300L-DNX-E-48-3Y	C9300L Cisco Catalyst Essentials, 48-port, 3 Year Term license
C9300L-DNX-E-48-5Y	C9300L Cisco Catalyst Essentials, 48-port, 5 Year Term license
C9300L-DNX-E-48-7Y	C9300L Cisco Catalyst Essentials, 48-port, 7 Year Term license

C9300L- DNX- A-48-3Y	C9300L Cisco Catalyst Advantage, 48-port, 3 Year Term license
C9300L- DNX- A-48-5Y	C9300L Cisco Catalyst Advantage, 48-port, 5 Year Term license
C9300L- DNX- A-48-7Y	C9300L Cisco Catalyst Advantage, 48-port, 7 Year Term license
C9300L- DNA- E-24-3Y	C9300L Cisco DNA Essentials, 24-port, 3 Year Term license
C9300L- DNA- E-24-5Y	C9300L Cisco DNA Essentials, 24-port, 5 Year Term license
C9300L- DNA- E-24-7Y	C9300L Cisco DNA Essentials, 24-port, 7 Year Term license
C9300L- DNA- A-24-3Y	C9300L Cisco DNA Advantage, 24-port, 3 Year Term license
C9300L- DNA- A-24-5Y	C9300L Cisco DNA Advantage, 24-port, 5 Year Term license
C9300L- DNA-	C9300L Cisco DNA Advantage, 24-port, 7 Year Term license

A-24-7Y	
C9300L-DNA-E-48-3Y	C9300L Cisco DNA Essentials, 48-port, 3 Year Term license
C9300L-DNA-E-48-5Y	C9300L Cisco DNA Essentials, 48-port, 5 Year Term license
C9300L-DNA-E-48-7Y	C9300L Cisco DNA Essentials, 48-port, 7 Year Term license
C9300L-DNA-A-48-3Y	C9300L Cisco DNA Advantage, 48-port, 3 Year Term license
C9300L-DNA-A-48-5Y	C9300L Cisco DNA Advantage, 48-port, 5 Year Term license
C9300L-DNA-A-48-7Y	C9300L Cisco DNA Advantage, 48-port, 7 Year Term license
C9300L-LIC=	Electronic Cisco DNA Upgrade License for C9300L switches. Note: when upgrading from Cisco DNA Essentials to Cisco DNA Advantage, Network Essentials is also upgraded to Network Advantage

Power supplies

Product number	Product description
PWR-C1-350WAC=	350WAC power supply spare
PWR-C1-715WAC=	715WAC power supply spare
PWR-C1-715WDC=	715WDC power supply spare
PWR-C1-1100WAC=	1100WAC power supply spare
PWR-C1-1900WAC=	1900WAC Power supply spare
PWR-C1-350WAC-P=	350WAC Platinum-rated power supply spare
PWR-C1-715WAC-P=	715WAC Platinum-rated power supply spare
PWR-C1-1100WAC-P=	1100WAC Platinum-rated power supply spare
PWR-C1-715WAC-UP	Upgrade to 715WAC Platinum-rated power supply
PWR-C1-1100WAC-UP	Upgrade to 1100WAC Platinum-rated power supply
PWR-C1-1900WAC-UP	Upgrade to 1900WAC Platinum-rated power supply

Cisco StackWise-480/1T and StackPower cables

Product number	Product description
----------------	---------------------

Cisco StackWise-480/1T and StackPower cables

Product number	Product description
STACK-T1-50CM=	Cisco StackWise-480/1T 50cm stacking cable spare
STACK-T1-1M=	Cisco StackWise-480/1T 1m stacking cable spare
STACK-T1-3M=	Cisco StackWise-480/1T 3m stacking cable spare
CAB-SPWR-30CM=	Cisco Catalyst StackPower cable 30cm spare
CAB-SPWR-150CM=	Cisco Catalyst StackPower cable 150cm spare

Cisco StackWise-320 Accessories

Product number	Product description
C9300L-STACK-KIT	Stack Kit for C9300L SKUs – includes 2 Stack Adaptors and 1 Stack Cable
C9300L-STACK-KIT=	Stack Kit for C9300L SKUs – includes 2 Stack Adaptors and 1 Stack Cable, spare
STACK-T3-50CM	50CM Type 3 Stacking Cable – default with Stack Kit for C9300L SKUs
STACK-T3-50CM=	50CM Type 3 Stacking Cable, spare for C9300L SKUs

Cisco StackWise-320 Accessories

Product number	Product description
STACK-T3-1M	1M Type 3 Stacking Cable for C9300L SKUs
STACK-T3-1M=	1M Type 3 Stacking Cable, spare for C9300L SKUs
STACK-T3-3M	3M Type 3 Stacking Cable for C9300L SKUs
STACK-T3-3M=	3M Type 3 Stacking Cable, spare for C9300L SKUs
C9300L-STACK-KIT2	Stack Kit 2 for C9300L SKUs – includes 2 Stack Adaptors and 1 Stack Cable
C9300L-STACK-KIT2=	Stack Kit 2 for C9300L SKUs – includes 2 Stack Adaptors and 1 Stack Cable, spare
STACK-T3A-50CM	50CM Type 3A Stacking Cable – default with Stack Kit for C9300L SKUs
STACK-T3A-50CM=	50CM Type 3A Stacking Cable, spare for C9300L SKUs
STACK-T3A-1M	1M Type 3A Stacking Cable for C9300L SKUs
STACK-T3A-1M=	1M Type 3A Stacking Cable, spare for C9300L SKUs
STACK-T3A-3M	3M Type 3A Stacking Cable for C9300L SKUs
STACK-T3A-3M=	3M Type 3A Stacking Cable, spare for C9300L SKUs

Cisco StackWise-320 Accessories**Product number Product description****Spare power cords**

CAB-TA-NA=	AC power cord for Cisco Catalyst (North America)
CAB-TA-AP=	AC power cord for Cisco Catalyst (Australia)
CAB-TA-AR=	AC power cord for Cisco Catalyst (Argentina)
CAB-TA-SW=	AC power cord for Cisco Catalyst (Switzerland)
CAB-TA-UK=	AC power cord for Cisco Catalyst (United Kingdom)
CAB-TA-JP=	AC power cord for Cisco Catalyst (Japan)
CAB-TA-250V-JP	Japan 250VAC power cord for Cisco Catalyst (Japan)
CAB-TA-EU=	AC power cord for Cisco Catalyst (Europe)
CAB-TA-IT=	AC power cord for Cisco Catalyst (Italy)
CAB-TA-IN=	AC power cord for Cisco Catalyst (India)
CAB-TA-CN=	AC power cord for Cisco Catalyst (China)
CAB-TA-DN=	AC power cord for Cisco Catalyst (Denmark)

Cisco StackWise-320 Accessories

Product number	Product description
CAB-TA-IS=	AC power cord for Cisco Catalyst (Israel)
CAB-ACBZ-12A=	AC power cord for Cisco Catalyst (Brazil), 12A/125V BR-3-20 plug up to 12A
CAB-ACBZ-10A=	AC power cord for Cisco Catalyst (Brazil), 10A/250V BR-3-10 plug up to 10A
CAB-C15-CBN	Cabinet jumper power cord, 250VAC 13A, C14-C15 connectors

Optics online reference

The Cisco Catalyst 9300 Series supports a wide range of optics. Because the list of supported optics is updated on a regular basis, consult the tables available here for the latest QSFP28, QSFP+, SFP+, and SFP compatibility information: https://www.cisco.com/en/US/products/hw/modules/ps5455/products_device_support_tables_list.html.

Warranty

Cisco Enhanced Limited Lifetime hardware warranty

The Cisco Catalyst 9300 Series Switches come with the Cisco Enhanced Limited Lifetime hardware warranty (E-LLW) that includes Next-Business-Day (NBD) delivery of replacement hardware where available and 90 days of 8x5 Cisco TAC support.

Your formal warranty statement, including the warranty applicable to Cisco software, appears in the information packet that accompanies your Cisco product. We encourage you to review the warranty statement shipped with your specific product carefully before use.

Cisco reserves the right to refund the purchase price as its exclusive warranty remedy.

For further information about warranty terms, visit <https://www.cisco.com/go/warranty>. Table 27 provides information about the E-LLW.

Table 27. E-LLW details**Cisco E-LLW**

Devices covered	Applies to Cisco Catalyst 9300 Series Switches.
Warranty duration	As long as the original customer owns the product.
End-of-life policy	In the event of discontinuance of product manufacture, Cisco warranty support is limited to 5 years from the announcement of discontinuance.
Hardware replacement	Cisco or its service center will use commercially reasonable efforts to ship a replacement for NBD delivery, where available. Otherwise, a replacement will be shipped within 10 working days after receipt of the Return Materials Authorization (RMA) request. Actual delivery times might vary depending on customer location.
Effective date	Hardware warranty commences from the date of shipment to customer (and in case of resale by a Cisco reseller, not more than 90 days after original shipment by Cisco).
TAC support	Cisco will provide during business hours, 8 hours per day, 5 days per week, basic configuration, diagnosis, and troubleshooting of device-level problems for up to a 90-day period from the date of shipment of the originally purchased Cisco Catalyst 9300 Series product. This support does not include solution or network-level support beyond the specific device under consideration.
Cisco.com access	Warranty allows guest access only to Cisco.com.

Product sustainability

Information about Cisco's Environmental, Social and Governance (ESG) initiatives and performance is provided in Cisco's CSR and sustainability reporting.

ENERGY STAR certification

Cisco is driving long-term value and market advantage by continuing to embed energy efficiency through hardware and software and by providing customers visibility into their energy consumption to help them develop a baseline, identify trends and anomalies, and take corrective actions.

With the ENERGY STAR certification of Catalyst 9300 Series models, Cisco is one of the first networking company to have third party-approved campus switches. Ecolabel certifications like ENERGY STAR help customers identify "environmentally preferable" products to help maximize energy efficiency, reduce greenhouse gas emissions, and lower energy costs.

ENERGY STAR certification reinforces Cisco's ongoing commitment to deliver energy-efficient products including top-rated power supplies, active power management and monitoring capabilities, and alignment to ISO 14000 Environmental Management systems standards – all designed with circularity principles in mind.

Learn more:

[ENERGY STAR Certified Product Finder](#)

Table 28. Links to sustainability topics

Sustainability topic	Reference
General	Information on product-material-content laws and regulations
	Materials
	Information on electronic waste laws and regulations, including our products, batteries and packaging
	WEEE Compliance
	Sustainability Inquiries
	Contact: csr_inquiries@cisco.com
	Information on product takeback and reuse program
	Cisco Takeback and Reuse Program

Sustainability topic	Reference
Safety and compliance	Table 25. Safety and compliance information
Mean Time Between Failures – MTBF (hours)	Table 18. Model Dimensions, Weight, and Mean Time between failures metrics
Power	Table 2. Cisco Catalyst 9300 Series switch configurations
Power supplies	Table 4. Power supply models Table 21. Power specifications Table 22. Power specifications – Platinum-rated power supplies
Fan	Table 7. Fan modules
Energy Efficient Ethernet	Smart operation
Power over Ethernet (Cisco UPOE and UPOE+)	Power over Ethernet leadership
Power connectors	Table 19. Power connectors
Power consumption (ATIS)	Table 23. Power Consumption of Standalone 9300 Series Switches Table 24. Power consumption of Standalone 9300 Series Switches with Platinum-rated power supply
ENERGY STAR certified models	ENERGY STAR Certified Large Network Equipment

Sustainability topic		Reference
Material	Product packaging weight and materials	Contact: environment@cisco.com
	Dimensions	Table 18. Model dimensions, weight, and mean time between failures metrics.
	Weight	Table 18. Model dimensions, weight, and mean time between failures metrics.
	Elimination of wet paint on plastic bezel	2019 Cisco Corporate Social Responsibility Report, Pg. 19 Stepping up our work on circularity

Cisco Services

Cisco Services for next-generation Cisco Catalyst 9000 Series Switches

Achieve infrastructure excellence faster and with less risk. Cisco Catalyst 9000 Services provide expert guidance to help you successfully deploy, manage, and support the Cisco Catalyst 9000 switching family. With unmatched networking expertise, best practices, and innovative tools, we can help you reduce overall upgrade, refresh, and migration costs as you introduce new hardware, software, and protocols into the network. Offering a comprehensive lifecycle of services – from implementation, optimization, technical, and managed services – Cisco experts help you reduce disruption and achieve operational excellence to extract maximum value from your Cisco DNA-ready infrastructure.

Learn more about Cisco Services for Enterprise Networks

Software policy for Cisco Catalyst 9300 Series Switches

Software policy for network stack components

Customers with the Network Essentials Stack and Network Advantage Stack software feature sets are provided with maintenance updates and bug fixes designed to maintain compliance of the software. This

includes compliance with published specifications, release notes, and industry standards as long as the original end user continues to own or use the product or up to one year from the end-of-sale date for the product, whichever occurs earlier.

Cisco Embedded Support for Cisco Catalyst and Cisco DNA term components

Cisco Embedded Support delivers the right support for Cisco software products and suites. It will keep your business applications performing as expected and protect your investment. Cisco Embedded Support for the Cisco Catalyst and Cisco DNA Essentials and Cisco Catalyst and Cisco DNA Advantage term components is included. Cisco Embedded Support provides access to TAC support, major software updates, maintenance and minor software releases, and the Cisco Embedded Support site, for increased productivity with anytime access.

Cisco Capital

Flexible payment solutions to help you achieve your objectives

Cisco Capital[®] makes it easier to get the right technology to achieve your objectives, enable business transformation, and help you stay competitive. We can help you reduce the total cost of ownership, conserve capital, and accelerate growth. In more than 100 countries, our flexible payment solutions can help you acquire hardware, software, services, and complementary third-party equipment in easy, predictable payments. Learn more.

Document history

New or revised topic	Described In	Date
Correction to say 9300 instead of 9200 in couple of entries (C9200-48S, C9200-24S)	Table 4: Power Supply Models	October 9, 2024
Correction for switching bandwidth numbers and addition of STP	Table 9: Bandwidth Specifications	October 9, 2024

New or revised topic	Described In	Date
virtual ports		
Added Simplified Campus Automation	All relevant sections	June 4, 2024
ENERGY STAR certification	All relevant sections	April 12, 2024
Added new models supporting the Meraki Software options	All relevant sections	February 6, 2024
Added Cisco Catalyst and Meraki Software options	All relevant sections	December 5, 2023
Added Information about 9300X, copper models	All relevant sections	February 3, 2022
Added Information about 9300X fiber models	All relevant sections	March 2, 2021
Added information about the 1G 90W UPOE+ SKUs	Across different sections	February 10, 2020
Added new SKUs for C9300L – Full PoE+ and mGig SKUs	Content added to all the tables	December 2, 2019

New or revised topic	Described In	Date
Updates for C9300 - large buffer/scale SKUs	All relevant sections	October 9, 2019
Adding Primary PSU upgrade option for 9300	Table 4: Power supply models	June 20, 2019
Product name change: Cisco ONE to Cisco DNA	Introduction	May 10, 2019
Wi-Fi 6 addition	Product Overview: Features	May 10, 2019
Add: Features	Product Overview: Features	May 10, 2019
Add: Modular uplink models table	Platform Details	May 10, 2019
Edit: Cisco Catalyst 9300 Series modular uplink	Platform Details	May 10, 2019
Edit: Table 1: Cisco Catalyst 9300 Series Switch configurations; uplink configuration add	Platform Details	May 10, 2019

New or revised topic	Described In	Date
Edit: Table 2: Name change to “Catalyst 9300...”	Platform Details	May 10, 2019
Add: Figure 3: picture for C9300L	Platform Details	May 10, 2019
Edit: Table 3: Power supply models	Platform Details	May 10, 2019
Add: Stacking, Table 4	Platform Details	May 10, 2019
Add: Stacking Accessories, Table 5	Platform Details	May 10, 2019
Edit: Replaced C3850 stack picture with C9300 stack picture	Platform Details	May 10, 2019
Add: Fan, Table 6	Platform Details	May 10, 2019
Edit: Table 7	Performance and Scalability	May 10, 2019
Add: Bandwidth Specifications	Performance and Scalability	May 10, 2019

New or revised topic	Described In	Date
Add: StackWise-320	Resiliency and High Availability	May 10, 2019
Edit: name change from Cisco One to Cisco DNA Software	Software Requirements	May 10, 2019
Edit: text edits	Licensing	May 10, 2019
Edit: Table 13	Licensing	May 10, 2019
Edit: Table 14	Specifications	May 10, 2019
Edit: Table 15	Connectors	May 10, 2019
Edit: Table 17	Power Supply Specifications	May 10, 2019
Edit: Table 21	Safety and Compliance	May 10, 2019
Edit: Table 23	Ordering Information	May 10, 2019

New or revised topic	Described In	Date
Added support for SD-Access Embedded Wireless	Added support for SD-Access Embedded Wireless Controller functionality.	November 13, 2018
Updated Platinum Power Supply specifications	Platinum rated power supplies available on the C9300 switches.	October 5, 2018
Updated availability of SSD card	Availability of 120G storage module for the C9300.	October 5, 2018
Updated Product overview	Added Catalyst 9500 high density platforms and updated associated speeds and densities, e.g. Up to 6.4-Tbps switching capacity with up to 2 Bpps of forwarding performance from “3.2 Tbps/1 Bpps” a. 32 port 100G, b. 32 port 40G, c. 48 port 25G. Added Catalyst 9500 mid density platform a. 24 port 25G, b. 16 port 1/10G. Added new optical interfaces - QSFP28, SFP28. Added new power supply options - 650W, 1600W. Added RESCONF support. StackWise Virtual extended to all Catalyst 9500 platforms.	March 31, 2018
Updated Audio Video Bridging	AVB support noted for certain platforms. Corrected references to Catalyst 9000 switches, rather than Catalyst 9000 Series switches. Corrected references to Cisco IOS XE, rather than IOS XE.	December 15, 2017

Quick Links

[About Cisco](#)

[Contact Us](#)

[Careers](#)

[Connect with a partner](#)

Resources and Legal

[Feedback](#)

[Help](#)

[Terms & Conditions](#)

[Privacy](#)

[Cookies / Do not sell or share my personal data](#)

[Accessibility](#)

[Trademarks](#)

[Supply Chain Transparency](#)

[Newsroom](#)

[Sitemap](#)



©2025 Cisco Systems, Inc.