

M18B-T015MA-EX9Q4LM


Photoelectric Sensor

M18 Prox-Style Photoelectric - Through-Beam



Note: The product images shown may change over time as products are updated.

Diagram

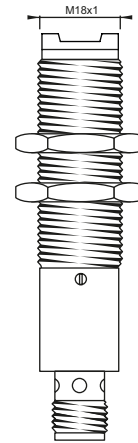

AC: 1/2" - 20 UNF Thread

Part Number

M18B-T015MA-EX9Q4LM


Features

Photoelectric sensors are used in virtually any manufacturing process with moving parts to detect products, machine parts, and a wide variety of moving objects.

For additional information, contact HTM Sensors at 800-644-1756 or service@htmsensors.com

Connection

AC Connector (1/2" - 20 UNF)



Technical Data

| | |
|----------------------------|--|
| Function Type | Thru-beam |
| Body Style | Cylindrical |
| Sensor Housing Material | Nickel-plated Brass |
| Lens Material | PC |
| Connector Pins | 4-pin |
| Sensing Range | 15m |
| Response Time | 15 ms |
| Output Type | Emitter |
| Output Function | - |
| Connection | MICRO |
| Body Length | 75 mm |
| Operating Voltage | 20-250 VAC |
| Operating Temperature | -25 °C - +55 °C |
| Overload Trip Point | - |
| Hysteresis | - |
| IP Rating: | IP67 |
| EMC Rating | IEC 60947-5-2, Parts 7.2.6.1. 2. 3 or RFI>3 V/m (in 30-1000 MHz), EFT>1 KV, ESD>4 KV (contact) |
| Shock Rating: | IEC 60947-5-2, Part 7.4.2 or 10-55 Hz, 1.0 mm amplitude in x, y and z directions for 30 min. IEC 60947-5-2, Part 7.4.1 or 30 g, 11 ms in x, y and z directions for six time each |
| Short Circuit Protected | NO |
| Max Current | 300 mA |
| Over Current Protection | NO |
| Reverse Polarity Protected | NO |
| Current Consumption | ≤30 mA |
| Width | |
| Height | |



In the USA: 1889 Maryland Ave., Niagara Falls, NY 14305
In Canada: 3419 Mainway, Burlington, ON L7M 1A9
Toll Free: 1-800-644-1756 • Fax: 888-283-2127
service@htmsensors.com

htmsensors.com