





Note: The product images shown may change over time as products are updated.

Dimensions

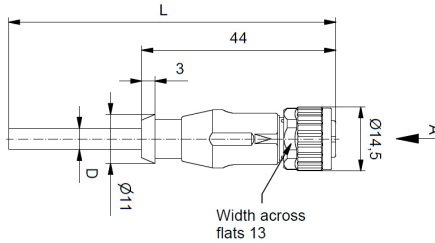

Connection

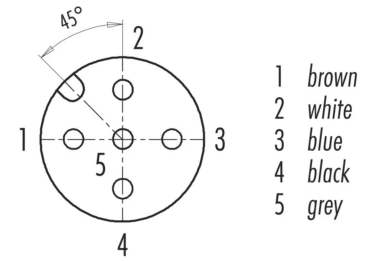

Part Number

R-FS5TZ-P665

Features

- High performance PUR cables for automotive applications
- 4 Million high flex rating for long-lasting performance
- Anti-vibration nuts for reliable connection
- Single-ended, double-ended and splitter versions available

Technical Data

Connector Type	M12
Cable Type	Single
Connector A	-
Connector B	Female Straight
Length (m)	5 m
Locking System	Screw
Rated Current	4 A
Rated Voltage	250 V
Wire Gauge	5 x 22 AWG
Stranding	19 x 34
Contact Carrier	PUR
Molded Body	PUR
Contact Material	CuZn
Contact Plating	Au (Gold)
Jacket Type	PUR
Coupling Nut	GD-Zn, Ni
Protection Class	IP67
Temperature Range	-25 °C to +80 °C

