Note: The product images shown may change over time as products are updated.

Dimensions

Connector A

Connector B

L1 — 42.9 [1.69"] — M12x1 — Ø14.5 [.57"]

Connection

45°

1 brown
2 white
3 blue
4 black
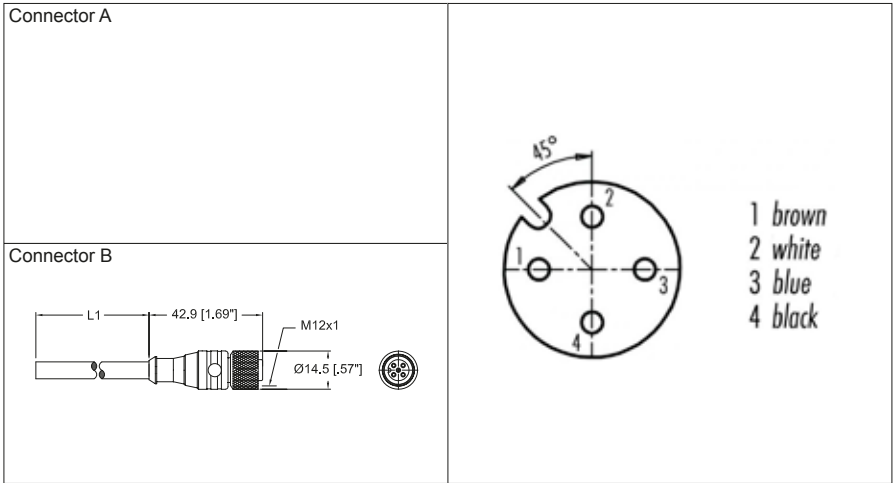
Part Number

R-FS4TZ-V8810

Features

HTM Sensors stocks thousands of sensor cables for convenient same-day-shipping. Standard M8 and M12 cables have the best prices in the industry and are always available and in stock for customer requirements.

New advances in sensor cables allow for extended durability and longevity in the harshest environments.

HTM SENSORS
1 YEAR WARRANTY

Technical Data

Cable Type	Single Ended Cable
Connector A	
Connector B	M12 A-Coded Female Straight
Length (m)	10 m
Locking System	Screw Lock
Rated Current	4A
Rated Voltage	250 V AC / 300 V DC
Wire Gauge	22 AWG
Stranding	0.1x32
Contact Carrier	TPU
Molded Body	TPU
Contact Material	CuSn
Contact Plating	Au
Jacket Type	PVC
Coupling Nut	CuZn
Protection Class	IP 67
Temperature Range	-30 C - +80 C

In the USA: 1889 Maryland Ave., Niagara Falls, NY 14305
In Canada: 3419 Mainway, Burlington, ON L7M 1A9
Toll Free: 1-800-644-1756 • Fax: 888-283-2127
service@htmsensors.com

htmsensors.com