




Note: The product images shown may change over time as products are updated.




**Dimensions**

**Connection**


**Connector A**

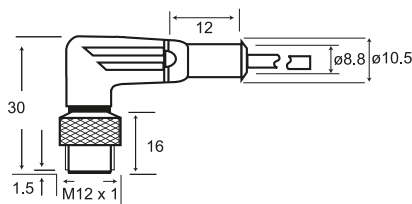


**Connector B**

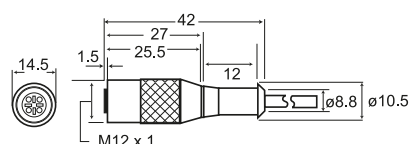

**Male insert M12**



**Female insert M12**



- 1 brown
- 2 white
- 3 blue
- 4 black

**Part Number**

R-MA4TZ-S070.6+R-FS4TZ-S070.6

**Features**

HTM Sensors stocks thousands of sensor cables for convenient same-day-shipping. Standard M8 and M12 cables have the best prices in the industry and are always available and in stock for customer requirements.

New advances in sensor cables allow for extended durability and longevity in the harshest environments.

**Technical Data**

Cable Type	Double
Connector A	Male Angled
Connector B	Female Straight
Length (m)	0.6 m
Locking System	Screw
Rated Current	4 A
Rated Voltage	250 V AC/300 V DC
Wire Gauge	4 x 24 AWG
Stranding	-
Contact Carrier	TPU
Molded Body	TPU
Contact Material	CuSn (Bronze)
Contact Plating	Au (Gold)
Jacket Type	Silicone
Coupling Nut	PTFE Brass
Protection Class	IP68
Temperature Range	-25 °C to +150 °C



In the USA: 1889 Maryland Ave., Niagara Falls, NY 14305  
 In Canada: 3419 Mainway, Burlington, ON L7M 1A9  
 Toll Free: 1-800-644-1756 • Fax: 888-283-2127  
 service@htmsensors.com