Cables and Connectors - Solenoid Cables



Note: The product images shown may change over time as products are updated.

Part Number


V-C1FA2V/R1C-V535

Features

HTM Sensors stocks thousands of sensor cables for convenient same-day-shipping. Standard M8 and M12 cables have the best prices in the industry and are always available and in stock for customer requirements.


New advances in sensor cables allow for extended durability and longevity in the harshest environments.

Wiring





Diagram

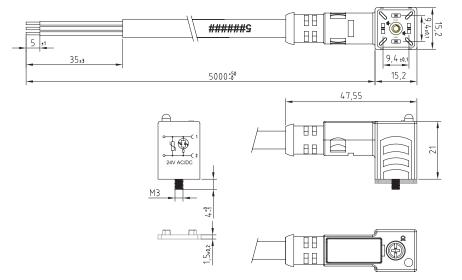

Tac	hoi	Dai	-
141			-

Connector Type	Form C Industrial
Cable Type	Single Ended
Connector A	-
Connector B	Female Angled
Contact Spacing	9.4 mm
Number of Poles	2 + 2PE
Earth Position	12 & 6
Jacket Type	PVC
Length	5 m
Body Material	Polypropylene
Contact Carrier	PA66
Circuit Type	Varistor + Bipolar Red LED
Gasket	NBR
Fixing Screw Size	M3x0.5 L22.5 mm
Fixing Screw Material	Fe/Zn
Rated Voltage	24 V
Rated Current	6A
Protection Class	IP67
Temperature Rating	-20 °C to +80 °C
Wire Gauge	3 x 22 AWG



