

DLTR6-5/4UZ-TZ12


Distribution Block

Single Occupancy



Note: The product images shown may change over time as products are updated.

Diagram

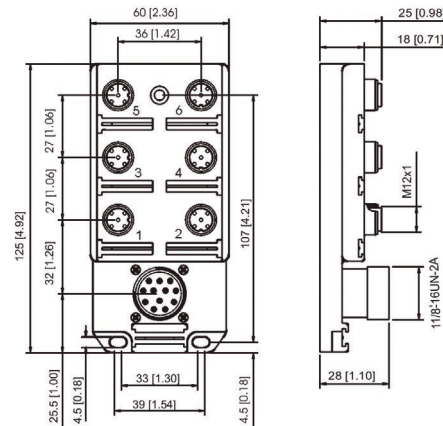

Part Number


DLTR6-5/4UZ-TZ12

Features

4, 6 or 8 port distribution blocks make sensor connections easy and fast. Available in single occupancy ports or double occupancy ports for use with splitter cables to connect 2 sensors to each port. Available in 12-pin or 19-pin connectors or with a 5 m or 10 m prewired cable.

For additional information, contact HTM Sensors at 800-644-1756 or service@htmsensors.com

Wiring

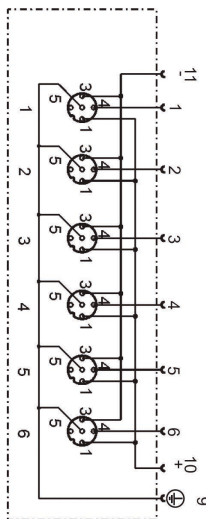

Technical Data

| | |
|-------------------------|--|
| Number of Ports | 6 |
| Port Size | M12 A Coded |
| Port Location | Top |
| LED Circuit | - |
| Home Run Connection | Mini 12 Pin |
| Home Run Location | Top |
| Length | - |
| Jacket Type | - |
| Rated Voltage | 60V AC / 75V DC |
| Rated Current | 4 Amp Max per Port / 12 Amps Max per Block |
| IP Rating | IP65 |
| Operating Temperature | -15 C to + 90 C |
| Vibration Rating | IEC-68-2-6 |
| Shock Rating | IEC-68-27 |
| Housing Material | Nylon 6/6 |
| O-Ring | Viton |
| Contact Carrier | PUR |
| Home Run Connector Body | - |



In the USA: 1889 Maryland Ave., Niagara Falls, NY 14305
 In Canada: 3419 Mainway, Burlington, ON L7M 1A9
 Toll Free: 1-800-644-1756 • Fax: 888-283-2127
service@htmsensors.com

htmsensors.com