




Note: The product images shown may change over time as products are updated.

Diagram

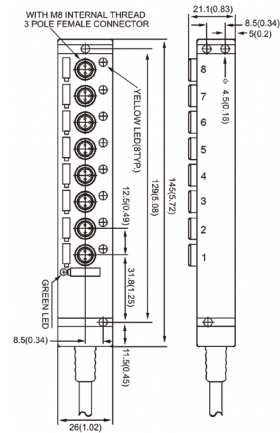

Part Number


DM8C8-3/3PA-9305

Features

4, 6 or 8 port distribution blocks make sensor connections easy and fast. Available in single occupancy ports or double occupancy ports for use with splitter cables to connect 2 sensors to each port. Available in 12-pin or 19-pin connectors or with a 5 m or 10 m prewired cable.

For additional information, contact HTM Sensors at 800-644-1756 or [service@htmsensors.com](mailto:service@htmsensors.com)

Wiring

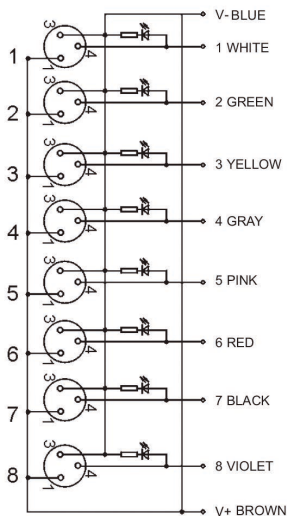

Technical Data

|                         |  |
|-------------------------|--|
| Number of Ports         | 8  |
| Port Size               | M8 A Coded                                 |
| Port Location           | Top  |
| LED Circuit             | PNP  |
| Home Run Connection     | Pre-wired                                  |
| Home Run Location       | Top  |
| Length                  | 5 m  |
| Jacket Type             | PVC  |
| Rated Voltage           | 10-30V DC                                  |
| Rated Current           | 4 Amp Max per Port / 12 Amps Max per Block |
| IP Rating               | IP67                                       |
| Operating Temperature   | -15 C to + 90 C                            |
| Vibration Rating        | IEC-68-2-6                                 |
| Shock Rating            | IEC-68-27                                  |
| Housing Material        | Nylon 6/6                                  |
| O-Ring                  | Viton                                      |
| Contact Carrier         | PUR  |
| Home Run Connector Body | -  |

