




Color :  Ivory

UPC Code : 078477139424

Country Of Origin : Please Contact Customer Service

Available Colors :

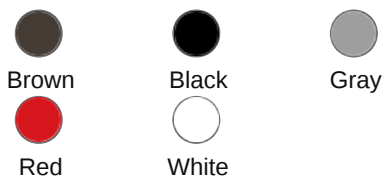

5262-I

15 Amp Duplex Receptacle/Outlet, Industrial Grade, Self-Grounding

Duplex Receptacle Outlet, Extra Heavy-Duty Industrial Specification Grade, Smooth Face, 15 Amp, 125 Volt, Back or Side Wire, NEMA 5-15R, 2-Pole, 3-Wire, Self-Grounding - Ivory

ROHS Compliant : Yes

Technical Information

Electrical Specifications

Amperage : 15 A

Current Limiting : Full Rated Current

Dielectric Voltage : Withstands 2000V per UL498

Grounding : Self-Grounding

Pole : 2

Temperature Rise : Max 30C after 250 cycles OL at 200 percent rated current

Voltage : 125 VAC

Wire : 3

Environmental Specifications

Flammability : Rated V-2 per UL 94

Operating Temperature : -40° C to 60°C

Material Specifications

Body Material : Thermoplastic Nylon

Clamp Nuts : Zinc-Plated Steel

Color : Ivory

Face Material : Thermoplastic Nylon

Ground Clips : Brass-Plated

Grounding Screw : Brass 8-32

Line Contacts : Brass Triple-Wipe

Strap Material : Brass

Terminal Screws : Brass 10-32

Yoke : Brass

Mechanical Specifications

Product ID : Ratings are permanently marked on device

Screw Terminal Torque : 14-18 in-lbs

Terminal Accom. : 14-10 AWG

Terminal ID : Brass-Hot, Green-Ground, Silver-Neutral

Termination : Back or Side Wire

Product Features

Color : Ivory

Device Type : Duplex Receptacle Outlet

Feature 4 : Smooth Face

Standards and Certifications

ANSI : C-73


CSA C22.2 No. 42 : File 152105

NEMA : WD-1 & WD-6

Grade : Extra Heavy-Duty
Industrial Specification Grade
NEMA : 5-15R

NOM : 057
UL Fed Spec WC-596 : File
E13399
UL498 : File E13399
Warranty : 10-Year Limited

Wiring Diagram



SPECIFICATION SUBMITTAL

JOB NAME: JOB NUMBER:	CATALOG NUMBERS: <table border="1" style="width: 100%; border-collapse: collapse;"><tr><td style="width: 50%; height: 20px;"></td><td style="width: 50%; height: 20px;"></td></tr><tr><td style="height: 20px;"></td><td style="height: 20px;"></td></tr></table>				

Leviton Manufacturing Co., Inc

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.
T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·
FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)
5386- 1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2024 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without
notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:
www.leviton.com/international/contacts

© 2024 Leviton Manufacturing Co., Inc.