

# Product data sheet

Specifications

SQUARE D



## Active harmonic filter 300 amp 380-480 VAC N12 Enclosure [TAA]

PCSP300D5N12

**Product availability: Non-Stock - Not normally stocked in distribution facility**

### Main

Range of Product	AccuSine
Product name	AccuSine PCS+
Product or Component Type	Active harmonic filter

### Complementary

Network type	3P
Network configuration	3 or 4 wires
Network rated voltage	380...480 V AC
Input Frequency	50/60 Hz +/- 3 Hz auto sensing
Maximum permissible voltage	1.1 x Un
Neutral correction	Not provided
RMS output current rating	300 A
Reactive power rating	249 kvar 480 V AC 50/60 Hz
Operating modes	Power factor correction Harmonic cancellation Mains current balancing
Installation location	Indoor
Enclosure mounting	Floor-standing
Protection Type	Circuit breaker protection
Disconnect type	Door-interlocked with rotary handle
Interrupt capacity	200 kA
Heat dissipation	Rear plenum with forced ventilation for high heat flow
Electromagnetic compatibility	Conducted EMC, class A EN 61000-6-4
Accessibility for operation	Front
Location of connection	Top or bottom

### Environment

Enclosure degree of protection	UL type 12
Environmental characteristic	Operating 3C2 IEC 60721-3-3 Operating 3S2 IEC 60721-3-3 Storage 3C3 IEC 60721-3-3 Storage 3S3 IEC 60721-3-3
Operating altitude	<= 3280.84 ft (1000 m) 1 % per 100 m
Ambient air temperature for operation	32...104 °F (0...40 °C) 32...122 °F (0...50 °C) maximum with current derating of 2 % per °C

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Relative humidity	0...95 %
PCBA protection	Conformal coated
Standards	UL 60947-1 UL 508 CSA C22.2 No 60947-1-07 EN 61000-6-4 EN 60439-1 CSA C22.2 No 14
Product Certifications	ABS cULus CE RCM
Ambient Air Temperature for Storage	-4...140 °F (-20...60 °C)
Net Weight	892.9 lb(US) (405 kg)
Height	82.7 in (2100 mm)
Width	35.4 in (900 mm)
color	Light gray RAL 7035)
Depth	23.6 in (600 mm)

## Ordering and shipping details

Category	US1DE2C00089
Discount Schedule	DE2C
GTIN	3606480851186
Returnability	No
Country of origin	US

## Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	91.8 in (233.1 cm)
Package 1 Width	47.008 in (119.4 cm)
Package 1 Length	47.008 in (119.4 cm)
Package weight(Lbs)	1161.8 lb(US) (527.0 kg)

## Compliance

Compliance	TAA BAA via COTS
------------	---------------------

## Contractual warranty

Warranty (in months)	18
----------------------	----



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



### Environmental footprint

Total lifecycle Carbon footprint	190 ton CO2 eq.
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Carbon footprint of the manufacturing phase [A1 to A3]	4 250 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	388 kg CO2 eq.
Carbon footprint of the installation phase [A5]	129 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	184 ton CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	702 kg CO2 eq.

### Use Better



### Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
<a href="#">EU RoHS Directive</a>	Compliant with Exemptions
SCIP Number	41f8a5bd-7758-4f6b-8e3f-271055f150ec
REACH Regulation	<a href="#">REACH Declaration</a>
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>

### Use Longer




### Lifetime extension

Repair	No
--------	----

### Use Again




### Repack and remanufacture

Recyclability potential, in %	73
Circularity Profile	<a href="#">End of Life Information</a>
Take-back	No
WEEE Label	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Technical Illustration

Wiring diagram

---

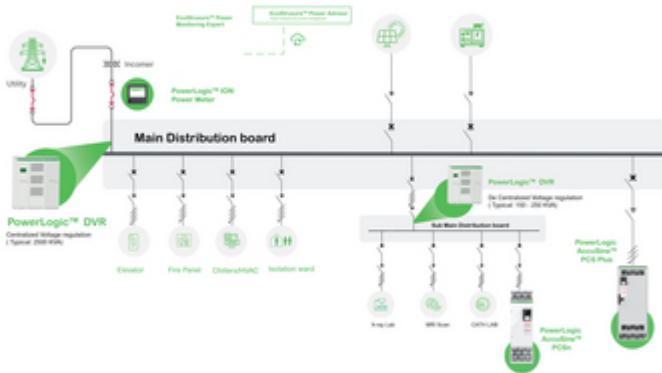

Technical Illustration

Assembly's dimensions

---

