



# 77C SERIES

## Bronze Full Port Ball Valve

Job Name:	Contractor:
Job Location:	P.O. Number:
Engineer:	Representative:
Tag:	Wholesale Distributor:

### DESCRIPTION

The Apollo® 77C "Contractor Series" ball valve features a dezincification resistant bronze body, premium "multi-fill" MPTFE seats and stem packing, and a "Solid Ball" design that delivers true full-port flow performance. Cast and machined in Apollo's South Carolina manufacturing plants utilizing proven ASTM materials.

### FEATURES


Multi-Fill PTFE Seats & Seals  
Blow-out Proof Stem Design  
Adjustable Stem Packing  
Full-Port "Solid Ball" Design  
100% Factory Tested  
**Made in USA**

### APPROVALS

MSS SP-110 Compliant  
CRN: OC10908.5C

### PERFORMANCE RATING

Maximum Pressure: 600 psi CWP, 150 psi SWP  
Maximum Temperature: 500°F  
Vacuum service to 29 in. Hg

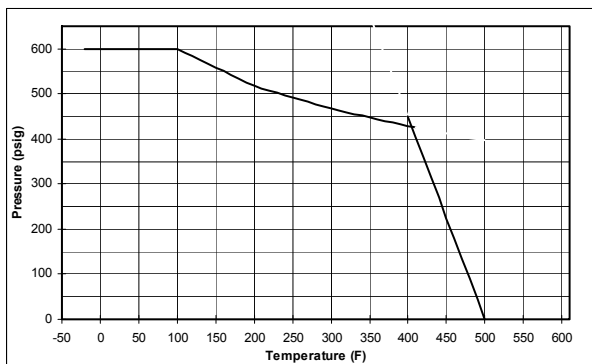

### STANDARD MATERIAL

Part Name	Material
Gland	ASTM B16 Brass
Nut	Zinc Plated Steel
Packing	MPTFE
Seat	MPTFE
Stem	ASTM B16 Brass
Ball	ASTM B16 Brass Chr Plt
Retainer	B584 Bronze or B16 Brass
Body	B584 Bronze
Handle	Zinc Plated Steel/Vinyl



### OPTIONS (For 1/4" to 2")

- ☐ (-01) Standard Lever and Trin
- ☐ (-04) 2 1/4" Stem Extension
- ☐ (-07) Tee Handle
- ☐ (-10) S.S. Handle and Nut
- ☐ (-11) Therma-Seal™ Insulating Tee Handle
- ☐ (-27) Locking Handle
- ☐ (-47) Oval Locking Handle
- ☐ (-92) Balancing Stop
- ☐ (-94) 2 1/4" Stem Extension and Balancing Stop
- ☐ (77C-140 & 77C-240 Series) S.S. Vented Ball and Stem
- ☐ (77CLF) Lead Free 0.25% max, ANSI 3<sup>rd</sup> Party Certified

### DIMENSIONS

Model Number	Size (in.)	Dimensions (in.)					Cv	Wt.*** (lbs.)
		A	B	C	D	E		
NPT								
77C-101-01	1/4"	0.37	0.95	1.97	1.76	3.74	5	0.6
77C-102-01	3/8"	0.37	1.07	2.09	1.76	3.74	7	0.5
77C-103-01	1/2"	0.50	1.15	2.25	1.79	3.74	16	0.6
77C-104-01	3/4"	0.75	1.32	2.65	2.00	4.88	36	1.0
77C-105-01	1"	1.00	1.53	3.07	2.19	4.88	68	1.8
77C-106-01	1 1/4"	1.25	2.04	4.08	3.13	7.06	125	4.4
77C-107-01	1 1/2"	1.50	2.12	4.23	3.29	7.06	177	4.6
77C-108-01	2"	2.00	2.43	4.85	3.83	7.06	389	8.1
77C-109-01	2 1/2"	2.50	3.12	6.37	4.51	8.06	503	16.2
SOLDER								
77C-202-01	3/8"	0.37	1.30	2.21	1.76	3.74	7	0.6
77C-203-01	1/2"	0.50	1.41	2.58	1.79	3.74	16	0.6
77C-204-01	3/4"	0.75	1.64	3.03	2.00	4.88	36	1.0
77C-205-01	1"	1.00	1.92	3.61	2.19	4.88	68	1.6
77C-206-01	1 1/4"	1.25	2.36	4.44	3.13	7.06	125	3.9
77C-207-01	1 1/2"	1.50	2.63	4.89	3.29	7.06	177	4.3
77C-208-01	2"	2.00	3.17	6.06	3.83	7.06	389	7.6
77C-209-01	2 1/2"	2.50	3.77	7.14	4.51	8.06	503	15.9

\*\*\* Weights based on Standard Configuration

