

C.F.F. SS · SERIES 316 STAINLESS STEEL VALVES

BALL VALVES


SS-2B

BALL



- Two Piece Body
- Full Port
- Screwed Ends
- Blowout Proof Stem
- Adjustable Packing Nut
- Locking Lever Handle
- Actuator Mounting Pad
- 2000 P.S.I. W.O.G.
(see chart)
- Threads to ANSI
B1.20.1 (NPT)
- Size Range 1/4" to 4"

Manufactured in accordance with
ISO 9002 quality standards.

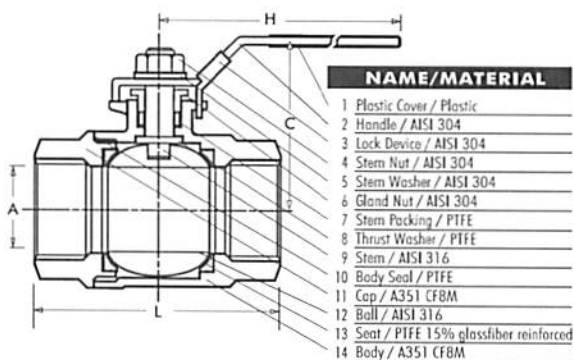


Visit us on-line at:
www.cffstainless.com

SS · 2B BALL VALVE


BALL VALVES

DIMENSIONS										
	Size	D	L	C	H	G	S	CV Factor	Torque N/M	KG
8	¼	11.6	55	48	120	12.7	28.5	6	2.0	0.3
10	⅜	12.7	55	48	120	12.7	28.5	7	2.5	0.3
15	½	15	61	49	120	12.7	28.5	10	3.0	0.3
20	¾	20	80	55	130	22.1	35	25	5.5	0.58
25	1	25.4	89	69	155	22.1	35	35	7.0	1.04
32	1¼	32	96	77	155	23.6	38	46	15	1.54
40	1½	39	117	84	185	23.6	38	80	20	2.26
50	2	50.8	140	93	185	23.6	38	110	25	3.80
65	2½	65	165	138	250	35.0	55	310	43	6.80
80	3	80	192	155	280	35.0	55	360	45	11.58

Design and materials are subject to change without notice.

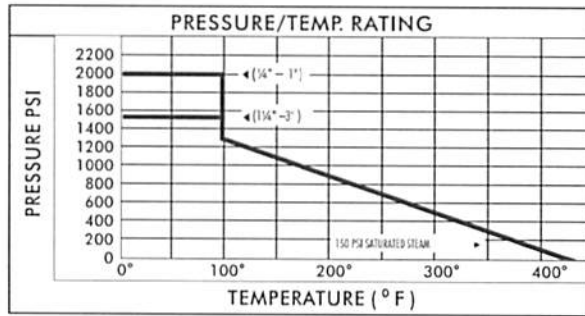

FLOW COEFFICIENT CV										
Size (in.)	¼	⅜	½	¾	1	1¼	1½	2	2½	3
Cv	6	7	10	25	35	46	80	110	310	360
Operating Torques (lbs.)	36	36	43	65	101	158	187	230	430	1380

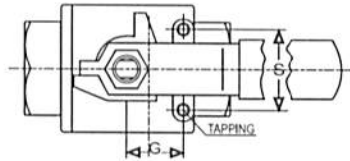

Visit us on-line at:
www.cffstainless.com