



ADAPTERS

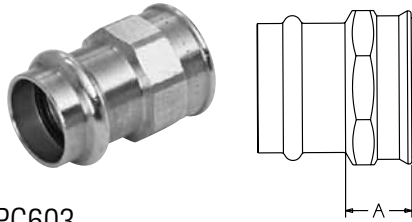


PC603
Adapter P x F – Brass Rod (*Wrot)

NOM. SIZE	APPROX. NET WT./LBS.	DIM. A INCHES
1/2	.102	13/16
*1/2 x 3/8	.103	13/32
1/2 x 3/4	.151	31/32
3/4	.173	27/32
3/4 x 1/2	.153	25/32
1	.237	15/16
*1 x 1/2	.398	13/4
1 x 3/4	.217	13/16
*1 x 1 1/4	.436	21/4
1 1/4	.377	11/16
1 1/4 x 1	.302	15/16
*1 1/4 x 1 1/2	.602	211/32
1 1/2	.518	11/16
*1 1/2 x 3/4	.335	21/8
1 1/2 x 1 1/4	.648	11/16
2	.714	1
*2 1/2	1.342	113/32
*3	1.884	123/32
*4	3.238	17/8

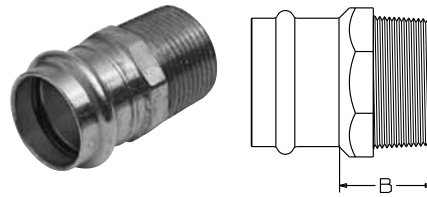

PC604
Adapter P x M – Brass Rod (*Wrot)


NOM. SIZE	APPROX. NET WT./LBS.	DIM. B INCHES
1/2	.112	7/8
*1/2 x 3/8	.107	15/32
1/2 x 3/4	.218	17/32
3/4	.207	11/16
3/4 x 1/2	.189	31/32
1	.268	13/32
1 x 3/4	.253	11/32
1 x 1 1/4	.518	121/32
1 1/4	.467	113/32
1 1/4 x 1	.408	115/32
1 1/4 x 1 1/2	.630	111/16
1 1/2	.696	11/2
1 1/2 x 1 1/4	.670	117/32
2	.927	17/16
*2 1/2	1.322	127/32
*3	2.104	21/8
*4	3.298	29/32

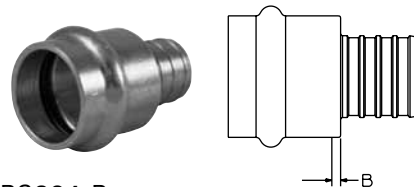

PC604-P
Adapter PEX x P – Wrot

NOM. SIZE	APPROX. NET WT./LBS.	DIM. B INCHES
1/2 x 1/2	.061	7/64
1/2 x 3/4	.111	7/32
3/4 x 1/2	.061	1/16
3/4 x 3/4	.108	9/64
1 x 1	.156	5/32


CAPS

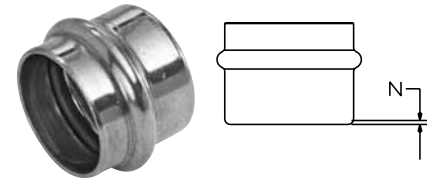

PC617
Cap P – Wrot

NOM. SIZE	APPROX. NET WT./LBS.	DIM. N INCHES
1/2	.046	5/32
3/4	.091	5/32
1	.125	11/32
1 1/4	.171	1/8
1 1/2	.314	3/16
2	.493	3/16
2 1/2	.482	7/32
3	.792	7/32
4	1.674	1/4

COUPLINGS

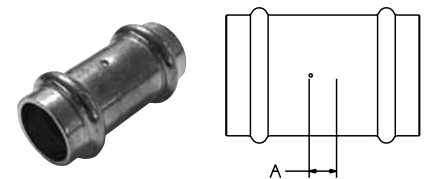

PC600-DS
Coupling P x P – Wrot

NOM. SIZE	APPROX. NET WT./LBS.	DIM. A INCHES
1/2	.077	3/16
3/4	.151	5/32
1	.190	5/32
1 1/4	.250	5/32
1 1/2	.511	3/16
2	.741	3/16
2 1/2	.515	1/8
3	.979	1/8
4	1.969	7/32

NOTE: Some items not certified by NSF to NSF/ANSI 61. See manufacturer's listing for approved sizes and applications, or contact NIBCO Technical Services for a complete listing of current certifications.