

# FRL Series [Interchange with Hansen 2RL & 3RL Series]



## Type:


One Way Shut-Off

## Working Pressure:

300 PSIG

## Operation:

Auto. Push to Connect;  
Twist-to-release

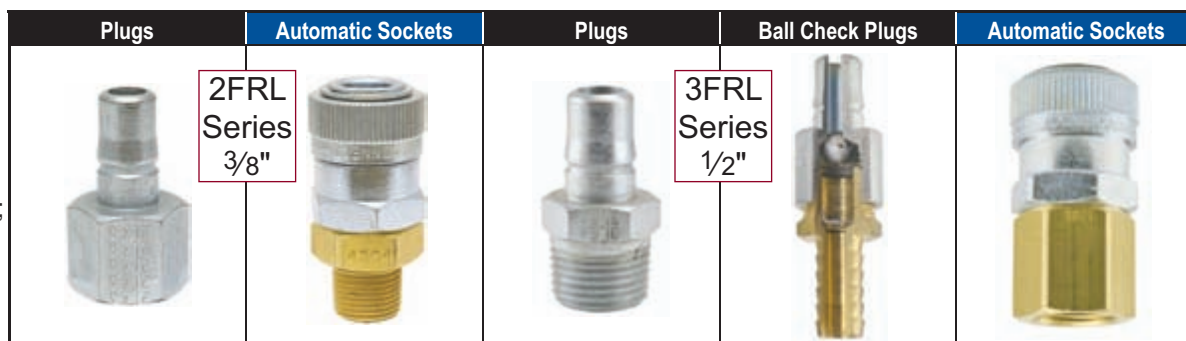

Size	Cat. No.	Hansen No.	Cat. No.	Hansen No.	Cat. No.	Hansen No.	Cat. No.	Hansen No.	Cat. No.	Hansen No.
<b>Female Thread</b>										
1/4 FPT	2L41	2-L16	2R4004	2-R16	3L51	3-L16			3R4015	3-R16
3/8 FPT	2L43	2-L21	2R4204	2-R21	-	-			3R5005	3-R21
1/2 FPT	2L45	2-L26	2R4404	2-R26	3L55	3-L26	-	-	3R5205	3-R26
3/4 FPT	-	-	-	-	3L57	3-L31			3R5405	3-R31
<b>Male Thread</b>										
1/8 MPT	2L38	2-L10	-	-	-	-			-	-
1/4 MPT	2L40	2-L15	2R4104	2-R15	3L50	3-L15			3R4905	3-R15
3/8 MPT	2L42	2-L20	2R4304	2-R20	3L52	3-L20	-	-	3R5105	3-R20
1/2 MPT	2L44	2-L25	2R4504	2-R25	3L54	3-L25			3R5305	3-R25
3/4 MPT	-	-	-	-	3L56	3-L30			3R5505	3-R30
<b>Hose Stem (Require Hose Clamps)</b>										
1/4 I.D.	2L46	2-L17	2R4604	2-R17	3L58	3-L17			3R5605	3-R17
5/16 I.D.	-	-	2R4704	2-R195	-	-	-	-	-	-
3/8 I.D.	2L48	2-L22	2R4804	2-R22	3L59	3-L22			3R5705	3-R22
1/2 I.D.	2L49	2-L27	2R4904	2-R27	3L60	3-L27	3L60G	3-L27G	3R5805	3-R27
3/4 I.D.	-	-	-	-	3L61	3-L32	3L61G	3-L32G	3R5905	3-R32
<b>Push-On Hose Stem</b>										
3/8 I.D.			2R1714						-	
1/2 I.D.	-	-	2R1814	-	-	-	-	-	3R1815	-
<b>Reusable Hose Clamp ID x OD</b>										
3/8 x 5/8	2LPD7	2-L23D7	2RSD7	2-R23D7					3RSD7	3-R23D7
3/8 x 11/16	2LPD9	2-L23D9	2RSD9	2-R23D9					3RSD9	3-R23D9
3/8 x 3/4	2LPD11	2-L23D11	2RSD11	2-R23D11	-	-	-	-	3RSD11	3-R23D11
3/8 x 13/16	2LPD13	2-L23D13	2RSD13	2-R23D13					3RSD13	3-R23D13
1/2 x 13/16	2LPP13	2-L28P13							3RSP13	3-R28P13
1/2 x 7/8	2LPP15	2-L28P15							3RSP15	3-R28P15
1/2 x 15/16	2LPP17	2-L28P17							3RSP17	3-R28P17
1/2 x 1	2LPP19	2-L28P19							3RSP19	3-R28P19

- Profile drawings available at [www.couplers.com](http://www.couplers.com)
- See Page 69 for Full Size Templates
- See Page 68 for Optional Seal Compounds

COUPLERS & ACCESSORIES

CLAMPING PRODUCTS

COUPLER SPEC'S & LAYOUTS

TECHNICAL DATA

INDEX