


## PRODUCT RANGE - 45(s) SEGMENTED

### aquatherm green pipe® ELBOW 45° (SEGMENTED, BUTT-FUSION)

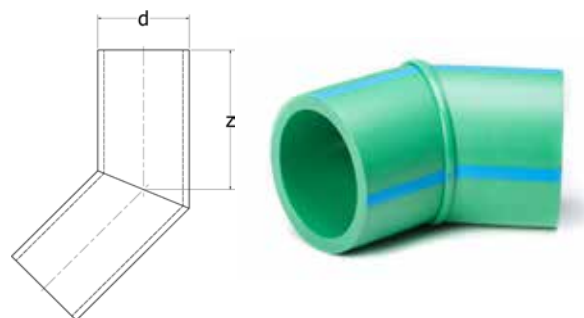


| SDR                 | Part no.             | Dimension<br>(ND — OD) | d    | z                | Weight |
|---------------------|----------------------|------------------------|------|------------------|--------|
|                     |                      |                        | [in] | [in, +0.25/-0.0] | [lb]   |
| 11<br>Non-<br>Faser | 7112530 <sup>a</sup> | 6" — 160 mm            | 6.30 | 7.44             | 5.75   |
|                     | 7112534 <sup>a</sup> | 8" — 200 mm            | 7.87 | 9.94             | 6.00   |
|                     | 7112538              | 10" — 250 mm           | 9.84 | 6.25             | 11.3   |
|                     | 7112542              | 12" — 315 mm           | 12.4 | 7.50             | 21.0   |
|                     | 7112544              | 14" — 355 mm           | 14.0 | 8.75             | 32.0   |
|                     | 7112546 <sup>b</sup> | 16" — 400 mm           | 15.8 | 10.0             | 46.0   |
|                     | 7112548 <sup>b</sup> | 18" — 450 mm           | 17.7 | 11.3             | 65.0   |

<sup>a</sup>Made with the Z-value of the ANSI B16.9 3D fittings with a larger Z-value.

<sup>b</sup>Mechanically stabilized with multi-layer, faser-composite (MF) technology in the center of the pipe wall.

UV Coated fittings available upon request. Contact your Aquatherm Regional Sales Manager for pricing and availability.

### aquatherm green pipe® ELBOW 45° (SEGMENTED, BUTT-FUSION)

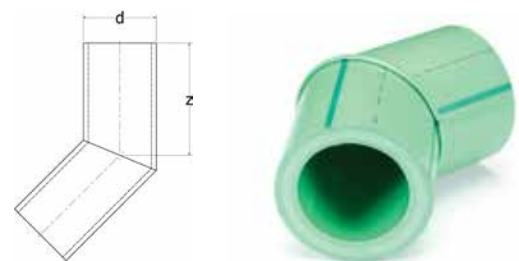

| SDR          | Part no.             | Dimension<br>(ND — OD) | d    | z                | Weight |
|--------------|----------------------|------------------------|------|------------------|--------|
|              |                      |                        | [in] | [in, +0.25/-0.0] | [lb]   |
| 7.4<br>Faser | 7312530 <sup>a</sup> | 6" — 160 mm            | 6.30 | 7.44             | 8.50   |
|              | 7312534 <sup>a</sup> | 8" — 200 mm            | 7.87 | 9.94             | 9.00   |
|              | 7312538              | 10" — 250 mm           | 9.84 | 6.25             | 17.0   |

<sup>a</sup>Made with the Z-value of the ANSI B16.9 3D fittings with a larger Z-value.

UV Coated fittings available upon request. Contact your Aquatherm Regional Sales Manager for pricing and availability.