



## **Multi-Flue Charger Commercial Gas Water Heaters**

### **Dependable, Tank Type Water Heaters for Commercial and Industrial Applications**

#### **Charger**

The Lochinvar Charger gas fired, tank type water heaters are designed to provide ease of installation, low stand-by loss and years of trouble free service. Chargers are ideally suited for apartments, schools, food service and many other commercial and industrial applications with requirements for hot water. They are built to ensure easy installation and maintenance.

#### **Outstanding Features / Quality Design**

The Charger features a multi-flue design for increased efficiency and fast heat transfer. The tank is glass lined for prolonged life and protection from rust and corrosion. The tank is certified for 150 psi working pressure and is available in standard construction or ASME construction (over 200,000 Btu/hr input). Multiple anode rods are installed for additional protection from corrosion. Factory installed, motorized flue dampers hold in heat during the off cycle.

#### **Ease of Installation**

Charger installations are fast and easy. The water heaters are fully assembled and ready to drop into any applications. The Charger has a small footprint and is often shorter than competitor models. The Charger is designed with three sets of water circulation tappings. Water connections on the top, the front and the back provide ultimate flexibility, especially on retrofit applications.


#### **Even More to Offer**

All Chargers feature spark ignition which is more efficient than traditional standing pilots. Hand hole cleanouts and slide out burner trays offer superior serviceability. And all models are combustible floor approved.



***Meets ASHRAE Energy Efficiency Standards***

## Dimensions and Specifications:

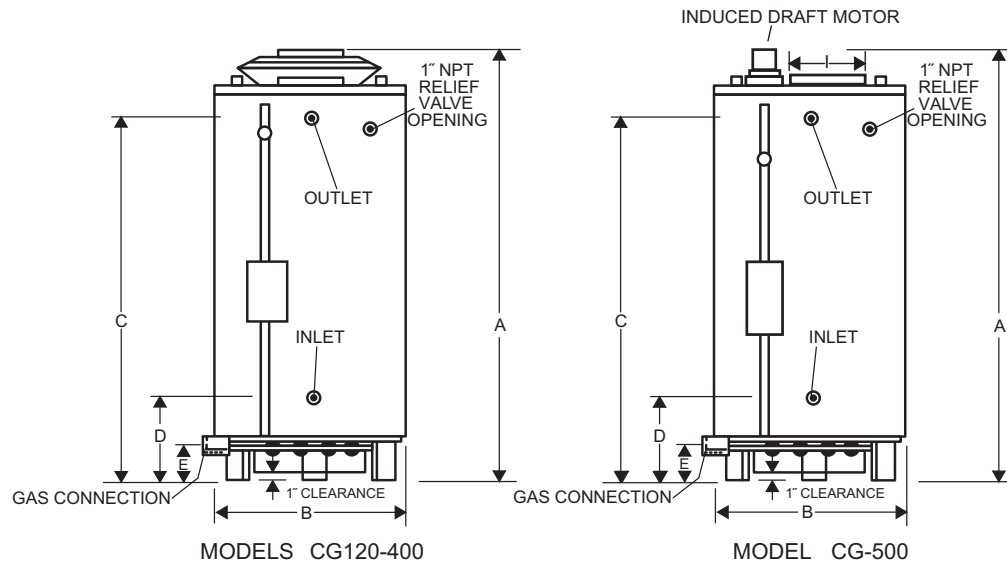

### FOR EASE IN ORDERING BY MODEL NUMBER

CG	N	180	080
Charger	Natural Gas	Btu/hr Input	Gallon Capacity

*This is a natural gas  
Charger water heater.  
It has standard construction,  
180,000 Btu/hr, and 81 gallon  
storage capacity.*

MODELS CG120-400				MODEL CG-500									
Model Number	Btu/hr Input	Capacity Gallons	GPH @ 100°F Rise	A	B	C	D	E	Vent Size	Gas Conn	Water Conn	Shipping Weight	Shipping Weight (ASME)
CGN120 070	120,000	71	116	69-3/4"	27-3/4"	52"	19-3/4"	4-1/4"	6"	1/2"	1-1/2"	400	-
CGN150 032	150,000	32	145	45"	27-3/4"	42-1/2"	15-3/4"	5"	6"	3/4"	1-1/2"	460	-
CGN155 080	154,000	81	149	73"	27-3/4"	59"	19-3/4"	4-1/4"	6"	1/2"	1-1/2"	470	-
CGN180 080	180,000	81	175	67-1/2"	27-3/4"	54-3/4"	20-1/2"	4-1/2"	6"	1/2"	1-1/2"	470	-
CGN200 032	199,000	32	194	45"	27-3/4"	42-1/2"	15-3/4"	5"	6"	3/4"	1-1/2"	460	-
CGN200 080	199,000	81	193	67-1/2"	27-3/4"	54-3/4"	20-1/2"	4-1/2"	6"	1/2"	1-1/2"	470	-
CGN200 100	199,000	100	193	75"	27-3/4"	62-3/4"	20-1/2"	4-1/2"	6"	1/2"	1-1/2"	603	-
CGN199 100 (A)	199,000	100	193	72"	30-1/4"	56-1/2"	19-3/4"	4-1/2"	6"	1/2"	2"	630	725
CGN250 100 (A)	250,000	100	242	72"	30-1/4"	56-1/2"	19-3/4"	4-1/2"	8"	1/2"	2"	630	725
CGN250 065 (A)	251,000	65	243	75"	27-3/4"	58-3/4"	20"	4-1/2"	8"	1/2"	1-1/2"	750	862
CGN275 100 (A)	275,000	100	267	72"	30-1/4"	56-1/2"	19-3/4"	4-1/2"	8"	1/2"	2"	630	725
CGN305 065 (A)	305,000	65	296	75"	27-3/4"	58-3/4"	20"	4-1/2"	8"	1/2"	1-1/2"	750	862
CGN365 085 (A)	365,000	85	354	79-1/2"	27-3/4"	63"	22-1/2"	4-1/2"	8"	3/4"	1-1/2"	725	833
CGN400 100 (A)	390,000	100	378	75-1/2"	30-1/4"	59"	26-3/4"	4-1/2"	8"	3/4"	2"	760	874
CGN500 085 (A)	500,000	85	485	82-1/4"	27-3/4"	65-3/4"	25-1/2"	4-1/2"	8"	1"	1-1/2"	820	856

A = ASME construction

See the installation manual for dimensional information on Top and Back Tappings

### Standard Features:

- 80% Thermal Efficiency
- Multi-Flue Design
- Glass Lined Tank
- 150 PSI Working Pressure
- Tank Saver Anode
- ASME Temperature & Pressure Relief Valve
- Automatic Reset High Limit
- Spark Ignition
- 180°F Operation Approved
- Combustible Floor Approved
- Steel Jacket with Foam Insulation
- Hand Hole Cleanout
- Slide Out Burner Tray
- 3 Year Limited Warranty on Tank
- 1 Year Limited Warranty on Parts

### Optional Equipment:

- UL Sanitation
- High Altitude (2,000 to 8,000 feet)



Lochinvar, LLC  
300 Maddox Simpson Parkway  
Lebanon, Tennessee 37090  
P: 615.889.8900 / F: 615.547.1000  
www.Lochinvar.com

