



The Fire-Rated Ox Box is certified by Intertek/Warnock-Hersey to the following Fire Rating Standards:

ASTM E-814

2 hours (F), 1½ hours (T)
for 2-hour design

1 hour (F), 31 min (T)
for 1-hour design

CAN/ULC S115

2 hours (F), 1½ hours (T)
for 2-hour design

1 hour (F), 31 min (T)
for 1-hour design

ASTM E119

UL 1479




Fire-Rated Ox Box™

Outlet Box

Patent #7,360,553 & Other Patents Pending

- Available in washing machine, ice maker, lavatory, and toilet outlet box offerings
- Warnock Hersey Certified
- Constructed using fire retardant plastic resin
- Over-the-stud installation is the quickest, easiest, strongest, and carries the highest rated fire certification in the industry
- Debris covers included to protect boxes from drywall mud and paint

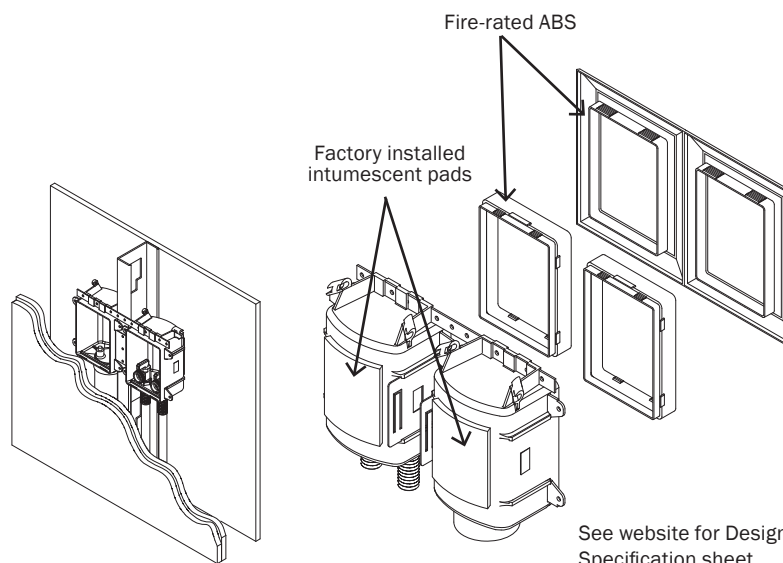

Fire-Rated Ox Box™





Washing Machine Outlet Box

Patent #7,360,553 & Other Patents Pending

- Boxes mount securely to stud
- Separates supply and drainage systems into two stud bays
- Drain knockout is easy to remove with pliers
- Supply lines can be mounted from above or below
- High-quality quarter-turn ball valves
- ¾" male hose-thread outlet connections

Standard Pack

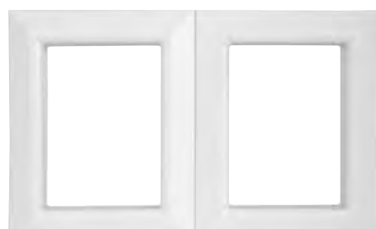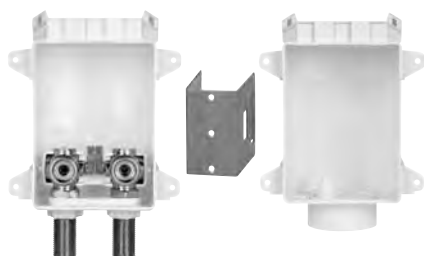

696R2303MF



Item No.	Shank Connection	Pkg	Min. Qty	Case Qty	List Price
STANDARD PACK					
696R2303MF	½" female sweat	B*	1	10	72.95 EA
696R2303CF	½" CPVC male	B*	1	10	73.55 EA
696R2303XF	½" PEX F1807	B*	1	10	74.05 EA
696R2303AF	½" PEX F2080	B*	1	10	84.45 EA
696R2303WF	½" PEX F1960	B*	1	10	76.45 EA
696RG2303MF	½" female sweat, no lead	✓ B*	1	10	96.95 EA
696RG2303CF	½" CPVC male, no lead	✓ B*	1	10	97.55 EA
696RG2303XF	½" PEX F1807, no lead	✓ B*	1	10	98.05 EA
696RG2303WF	½" PEX F1960, no lead	✓ B*	1	10	100.45 EA