

REGULATORS

"O" Series

Pressure Regulating Valve

Watson McDaniel reserves the right to change the designs and/or materials of its products without notice.
©2002 Watson McDaniel Company

Revised 7/2002

Model	"O" Series
Service	Steam, Air, Water, Other Liquids
Sizes	3/8", 1/2", 3/4", 1", 1-1/4", 1-1/2", 2"
Connections	Threaded
Body Material	Cast Iron
Seat & Disc	Hardened 420 Stainless Steel
Diaphragm	Phosphor Bronze – Steam Neoprene/Nylon – Water, Air & Oil (200° F Max.) Viton up to 300°F (optional)
Max. Inlet Pressure	250 PSIG
Min. Inlet Pressure	15 PSIG
Max. Diff. Pressure	125 PSI
Min. Diff. Pressure	15 PSI



PRESSURE TEMPERATURE RATING

NPT 250 PSIG @ 450° F

TYPICAL APPLICATIONS

The "O" Series Self-Contained Pressure Regulating Valves are used for reducing pressure in steam, air, and water systems. Commonly used in heating and other process applications.

HOW TO ORDER

Specify:

- Regulator "O" Series
- Size based on capacity chart
- Spring range or outlet pressure required
- Liquid, Air or Steam Service

Example: **1" O-Series – 10-30 Spring Range**

FEATURES

- Hardened stainless steel seat and disc for extended service life (55Rc)
- Neoprene & Nylon fiber diaphragm for water, oil, and air service. 180°F maximum temperature
- Viton diaphragm for up to 300°F service
- Phosphor Bronze diaphragm for steam service
- Double spring available for extended outlet pressure range
- Integral stainless steel strainer on 3/4"HC, 1", 1-1/4, 1-1/2", 2"

PRESSURE-ADJUSTING SPRING RANGES – Spring No. & Color Code


	Outlet Pressure	3/8"	1/2"	3/4"	Size 3/4"HC	1"	1-1/4"	1-1/2"	2"
Single Spring	0-10	13 blue/yellow	13 blue/yellow	13 blue/yellow	3 red	7 red/green	7 red/green	8 red/blue	8 red/blue
	10-30	–	–	–	4 green	8 red/blue	8 red/blue	9 red/yellow	9 red/yellow
	10-50	14 black/yellow	14 black/yellow	14 black/yellow	–	–	–	–	–
	30-50	–	–	–	5 blue	9 red/yellow	9 red/yellow	10 green/blue	10 green/blue
	40-85	–	–	–	6 yellow	10 green/blue	10 green/blue	11 green/yellow	11 green/yellow
	40-100	9 red/yellow	9 red/yellow	9 red/yellow	–	–	–	–	–
	100-200	10 green/blue	10 green/blue	10 green/blue	–	–	–	–	–
Double Spring	0-75	–	–	–	8, red/green 9, red/blue	8, red/blue 9, red/yellow	8, red/blue 9, red/yellow	8, red/blue 9, red/yellow	8, red/blue 9, red/yellow
	30-130	–	–	–	9, red/blue 10, red/yellow	9, red/yellow 10, green/blue	9, red/yellow 10, green/blue	9, red/yellow 10, green/blue	9, red/yellow 10, green/blue

REGULATORS

“O” Series Pressure Regulating Valve

DIMENSIONS & WEIGHTS – inches/pounds

Size	A	B	C	C Double Spring	Weight (lbs)
3/8"	3-1/4	6-1/2	8	-	8
1/2"	3-1/4	6-1/2	8	-	8
3/4"	3-1/4	6-1/2	8	-	8
3/4" HC*	4	8	10	12-1/2	15
1"	4-1/2	8-1/2	10-1/2	13	18
1-1/4"	4-1/2	8-1/2	10-1/2	13	18
1-1/2"	6-1/2	8-3/4	12	14-1/2	40
2"	6-1/2	8-3/4	12	14-1/2	40

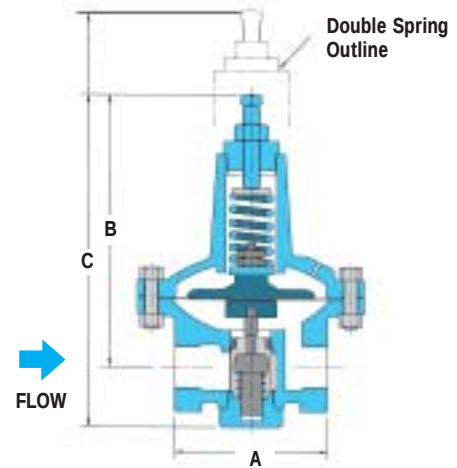

Note: 3/4 HC – High Capacity version of standard 3/4" valve

CAPACITIES – Steam (lbs/hr) *Air (scfm) *Water (gpm)

Inlet Press.	Outlet Press.	3/8", 1/2", 3/4"			3/4" HC			1"			1-1/4"			1-1/2"			2"		
		Steam	Air	Water	Steam	Air	Water	Steam	Air	Water	Steam	Air	Water	Steam	Air	Water	Steam	Air	Water
15	2	46	26	6	92	51	11	130	73	16	145	81	18	180	100	22	199	111	25
	5	38	21	4	75	42	9	106	59	13	119	66	14	147	82	18	163	91	19
20	5	65	36	8	130	72	15	184	102	22	205	114	25	254	141	30	281	156	34
	10	61	34	6	123	69	13	174	97	18	194	109	20	241	134	25	266	149	27
30	15	45	25	4	90	51	9	128	72	13	143	80	14	177	99	18	196	109	19
	5	83	46	10	167	93	20	236	131	28	264	147	32	327	181	39	362	201	43
50	10	83	46	10	167	93	18	236	131	25	264	147	28	327	181	35	362	201	39
	20	71	40	6	142	79	13	201	112	18	225	126	20	278	155	25	308	172	27
100	5	121	67	13	242	134	27	342	190	38	382	212	42	473	263	53	523	291	58
	25	121	67	10	242	134	20	342	190	28	382	212	32	473	263	39	523	291	43
125	40	87	49	6	174	97	13	247	138	18	276	154	20	341	191	25	377	211	27
	30	214	119	17	428	238	33	607	337	47	678	376	53	839	466	66	928	515	73
150	50	214	119	14	428	238	28	607	337	40	678	376	45	839	466	55	928	515	61
	70	195	109	11	275	154	18	390	218	25	436	244	28	540	301	35	597	333	39
200	30	261	145	19	522	290	39	739	410	55	826	458	62	1021	567	76	1130	627	84
	50	261	145	17	522	290	35	739	410	49	826	458	55	1021	567	68	1130	627	75
250	70	261	145	15	522	290	30	739	410	42	826	458	47	1021	567	58	1130	627	64
	100	201	112	10	402	225	20	569	318	28	636	355	32	787	440	39	871	486	43
300	30	307	171	22	615	341	44	871	484	62	974	540	69	1204	668	86	1332	740	95
	50	307	171	20	615	341	40	871	484	57	974	540	63	1204	668	78	1332	740	87
400	70	307	171	18	615	341	36	871	484	51	974	540	57	1204	668	70	1332	740	78
	100	298	166	14	596	333	28	844	471	40	943	527	45	1167	652	55	1291	721	61
500	120	239	133	11	478	267	22	677	378	31	756	422	35	935	523	43	1035	578	47
	30	401	222	26	802	445	52	1135	630	74	1269	705	83	1570	871	102	1737	964	113
600	50	401	222	24	802	445	49	1135	630	69	1269	705	78	1570	871	96	1737	964	106
	70	401	222	23	802	445	46	1135	630	65	1269	705	72	1570	871	89	1737	964	99
700	100	401	222	20	802	445	40	1135	630	57	1269	705	63	1570	871	78	1737	964	87
	150	347	194	14	694	388	28	983	549	40	1099	614	45	1359	759	55	1504	840	61
800	50	494	274	28	988	549	57	1400	777	80	1565	869	90	1935	1074	111	2141	1189	123
	70	494	274	27	988	549	54	1400	777	76	1565	869	85	1935	1074	105	2141	1189	116
900	125	494	274	22	988	549	45	1400	777	63	1565	869	71	1935	1074	88	2141	1189	97
	150	494	274	20	988	549	40	1400	777	57	1565	869	63	1935	1074	78	2141	1189	87
1000	175	465	260	17	930	520	35	1318	736	49	1473	823	55	1822	1018	68	2016	1126	75

For capacities of other gases multiply the air capacities by the following factors: Argon-0.85 Co₂-0.81 Helium-2.69 Nitrogen-1.02
* Air and water capacities are based on using elastomeric diaphragms.