

- Excellent water removal efficiency
- For heavy duty applications with minimum pressure drop requirement
- Unique deflector plate that creates swirling of the air stream ensuring maximum water and dirt separation
- Large filter element surface guarantees low pressure drop and increased element life
- 40 micron filter element standard, 5 micron available
- Metal bowl with sight gauge standard
- Twist drain as standard, optional auto drain
- Large bowl capacity
- Optional high capacity bowl(s) available



3/4" & 1"



1-1/4" & 1-1/2"

Material specifications


Description		(Hi-Flow) F602-06W F602-08W F602-06E F602-08E	(Hi-Flow) F602-10W F602-12W F602-10E F602-12E
Body		Zinc	Zinc
Bowl	(E) 32 oz	Aluminum	Aluminum
	(W) 16 oz	Zinc	Zinc
Drains	Housing R	Acetal	Acetal
	Housing Q	Bronze	Bronze
Drain - Twist	Body & stem	Brass	Brass
Filter element	5 micron	Polypropylene	Polypropylene
	40 micron	Polypropylene	Polypropylene
Seals		Nitrile	Nitrile
Sight gauge		Nylon	Nylon

Operating information

		F602 (Hi-Flow)
Operating pressure:	Aluminum bowl (E) 32 oz.	0 to 300 PSIG (0 to 20.4 bar)
	Zinc (W) 16 oz.	0 to 250 PSIG (0 to 17.2 bar)
	With internal auto drain (R)	20 to 175 PSIG (1.4 to 11.9 bar)
	With external auto drain (Q)	0 to 250 PSIG (0 to 17.2 bar)
Operating temperature:	Aluminum bowl (E) 32 oz.	40°F to 150°F (4.4°C to 65.6°C)
	Zinc (W) 16 oz.	40°F to 150°F (4.4°C to 65.6°C)
	With internal auto drain (R)	40°F to 125°F (4.4°C to 52°C)
	With external auto drain (Q)	40°F to 150°F (4.4°C to 65.6°C)

For technical information see CD

Particulate Filters




	Port size	Bowl type	Bowl size	Flow SCFM	Part number (NPT)	
					Twist drain	Automatic float drain
F602 	3/4"	Metal / Sight gauge	16 oz	270	F602-06WJ	F602-06WJR
	3/4"	Metal / Without sight gauge	32 oz	270	F602-06EJ	F602-06EJR
	1"	Metal / Sight gauge	16 oz	300	F602-08WJ	F602-08WJR
	1"	Metal / Without sight gauge	32 oz	300	F602-08EJ	F602-08EJR
F602 	1-1/4"	Metal / Sight gauge	16 oz	380	F602-10WJ	F602-10WJR
	1-1/4"	Metal / Without sight gauge	32 oz	380	F602-10EJ	F602-10EJR
	1-1/2"	Metal / Sight gauge	16 oz	450	F602-12WJ	F602-12WJR
	1-1/2"	Metal / Without sight gauge	32 oz	450	F602-12EJ	F602-12EJR


 Most popular.


General Industrial Air Preparation Products
Liquid Separators
Particulate Filters
Coalescing Filters
Regulators
Pilot Regulators
Filter / Regulators
Micro-Mist Lubricators
Mist Lubricators
Combinations


F602-06W, F602-08W (Hi-Flow)

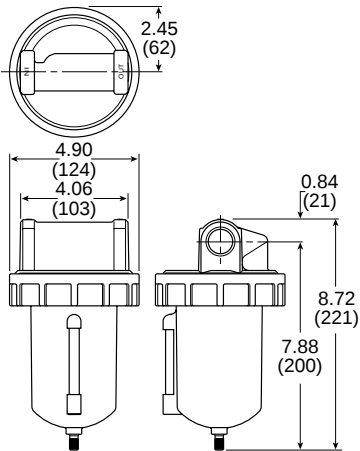


F602-06E, F602-08E (Hi-Flow)

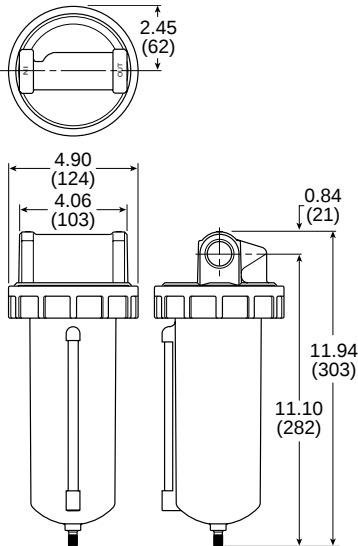

F602-10W, F602-12W (Hi-Flow)

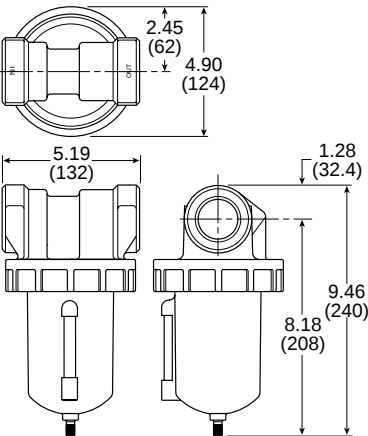

F602-10E, F602-12E (Hi-Flow)

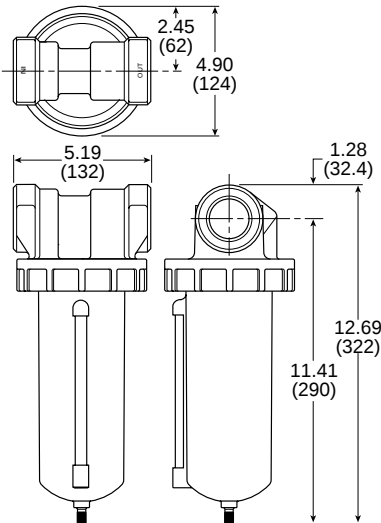

Service kits

Description		(Hi-Flow) F602-06W, F602-08W, F602-06E, F602-08E	(Hi-Flow) F602-10W, F602-12W, F602-10E, F602-12E
Bowl kits –	Aluminum (E) 32 oz	BK603B	BK603B
	Zinc / sight gauge (W) 16 oz	BK605WB	BK605WB
Drain kits –	Internal auto	SA602MD	SA602MD
	Manual	SA600Y7-1	SA600Y7-1
Filter element kits –	40 micron	EK602B	EK602B
	5 micron	EK602VB	EK602VB
Mounting bracket kits –	3/4" unit	SA200AW57	
	1" unit	SA200CW57	
Repair kits –	Deflector, baffle assy, & retaining rod	RK602B	RK602B
	External auto drain	RK602D	RK602D
	Internal auto drain	RK602MD	RK602MD
	Metal bowl / sight gauge	RKB605WB	RKB605WB