


L20 QIX Lubricators



Features


- Unique Interchangeable QIX Inserts Allow One Module to Accommodate 5 Port Sizes 1/4", 3/8", 1/2", 3/4", 1"
- High Flow Venturi and By-pass Valve to Minimize Pressure Drop and Ensure Consistant Lubrication at All Rated Flows
- Excellent Water Removal Efficiency
- Tamper Resistant Removable Drip Control Knob
- Manual Drain Standard
- High Flow: 250 SCFM for 3/4" & 1" Port Sizes

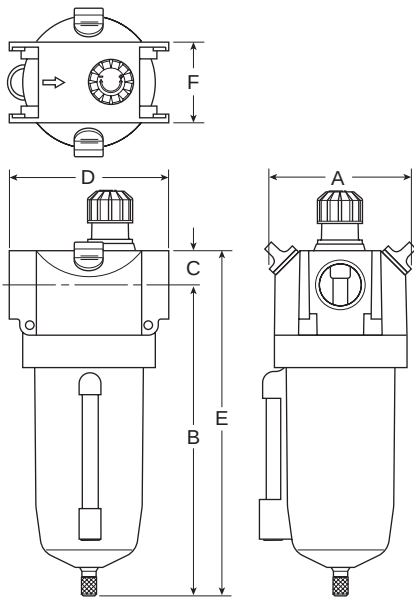

L20 Filter Dimensions						
A	B	C	D*	D**	E	F
3.13 (80)	6.82 (173)	2.04 (52)	3.50 (89)	4.50 (114)	8.86 (228)	1.77 (45)


inches
(mm)
* 1/4 thru 3/4 Inch Port Insert Size
** 1 Inch Port Insert Size

Ordering Information

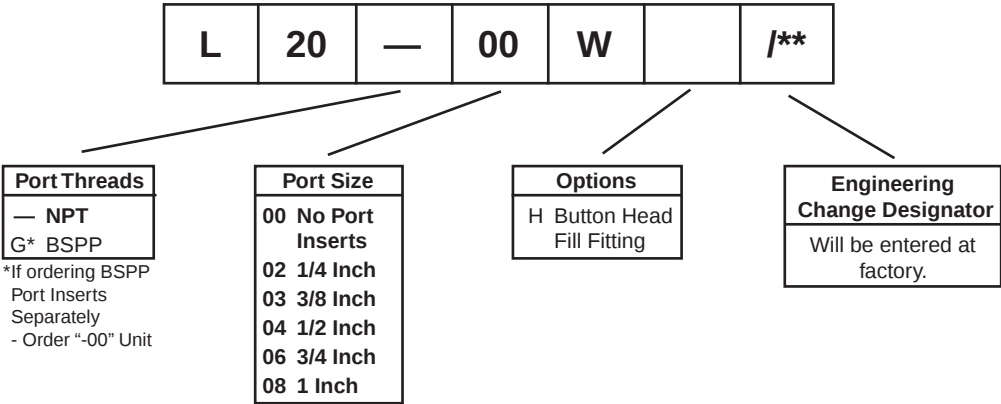

BOLD ITEMS ARE MOST POPULAR.

Technical Information

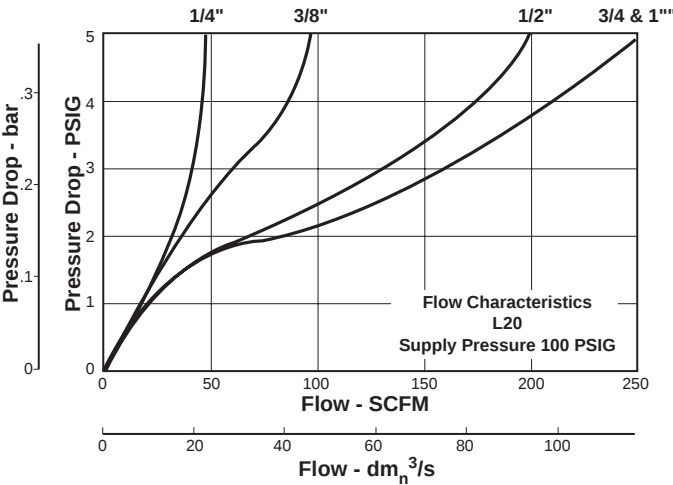

B

QIX L20 Kits & Accessories

Bowl Kit	BKF21WA
Bowl Sightgauge Repair Kit	RKB605WB
Button Head Fill Fitting	L606C14
(M14 male thread)	
Combination Connector	IK20CC
(Connects 2 QIX units together)	
Drip Control Repair Kit	RKL100
Internal By-pass Repair Kit	RKL20A
Mounting Brackets (pair)	MK20-0100
Port Insert Kits (includes o-rings & pins) NPT –	
1/4" Port Size.....	IK20Y
3/8" Port Size.....	IK20X
1/2" Port Size.....	IK20A
3/4" Port Size.....	IK20B
1" Port Size.....	IK20C
Shut-off Valve w/lockout (for inlet)	IK20V

Specifications

Bowl Capacity	10 oz.
Maximum Pressure	250 PSIG

Port Threads / Inserts –

00	No Port Inserts
02	1/4"
03	3/8"
04	1/2"
06	3/4"
08	1"

Temperature Range 40°F to 150°F

Weight 3.3 lb
(For total weight add .1 lb for port inserts)

Materials of Construction

Body	Zinc
Bowl	Zinc
Drain	Brass
Drip Control	Polyurethane
Seals	Buna-N
Sightgauge	Nylon
Thread Inserts	Zinc