



Air Preparation Products

Global

Prep-Air II

Miniature

P3N

General Industrial

Stainless Steel

Precision / Proportional

Bulk Liquid Separators

L606 General Industrial Mist Lubricators

- Metal bowl with sight gauge - standard
- Polycarbonate sight dome
- Bowl can be filled while air line is under pressure
- Proportional oil delivery over a wide range of air flows
- Large capacity bowl
- Optional high capacity bowl(s) available
- Precision needle valve assures repeatable oil delivery and provides simple adjustment of delivery rate
- 3/4", 1", 1-1/4" & 1-1/2" ports (NPT & BSPP)



L606 3/4" & 1"



L606 1-1/4" & 1-1/2"

Material specifications

Body	Zinc	
Bowl	(E) 32 oz	Aluminum
	(G) 64 oz.	Aluminum with polycarbonate sight gauge
	(W) 16 oz	Zinc with nylon sight gauge
Seals	Buna N	

Operating information

Operating pressure:	Aluminum bowl (E) 32 oz.	0 to 300 PSIG (0 to 20.4 bar)
	Aluminum (G) 64 oz.	0 to 150 PSIG (0 to 10.2 bar)
	Zinc (W) 16 oz.	0 to 250 PSIG (0 to 17.2 bar)
Operating temperature:	Aluminum bowl (E) 32 oz.	40°F to 150°F (4.4°C to 65.6°C)
	Aluminum (G) 64 oz.	40°F to 125°F (4.4°C to 52°C)
	Zinc (W) 16 oz.	40°F to 150°F (4.4°C to 65.6°C)
Suggested lubricant:		F442 oil
Petroleum based oil of 100 to 200 SSU viscosity at 100°F (38°C) and an aniline point greater than 200°F (93°C)		
(DO NOT USE OILS WITH ADDITIVES, COMPOUNDED OILS CONTAINING SOLVENTS, GRAPHITE, DETERGENTS, OR SYNTHETIC OILS.)		

L606 Lubricators




Port size	Bowl type	Bowl capacity	Drain	Flow SCFM	Part number	
					NPT	BSPP
3/4"	Zinc / Sight gauge	16 oz	Yes	325	L606-06W	L606G06W
3/4"	Aluminum	32 oz	Yes	325	L606-06E	L606G06E
3/4"	Aluminum / Sight gauge	64 oz	None	325	L606-06G	L606G06G
1"	Zinc / Sight gauge	16 oz	Yes	350	L606-08W	L606G08W
1"	Aluminum	32 oz	Yes	350	L606-08E	L606G08E
1"	Aluminum / Sight gauge	64 oz	None	350	L606-08G	L606G08G
1-1/4"	Zinc / Sight gauge	16 oz	Yes	325	L606-10W	L606G10W
1-1/4"	Aluminum	32 oz	Yes	325	L606-10E	L606G10E
1-1/4"	Aluminum / Sight gauge	64 oz	None	325	L606-10G	L606G10G
1-1/2"	Zinc / Sight gauge	16 oz	Yes	400	L606-12W	L606G12W
1-1/2"	Aluminum	32 oz	Yes	400	L606-12E	L606G12E
1-1/2"	Aluminum / Sight gauge	64 oz	None	400	L606-12G	L606G12G


Most popular.



L606 - 3/4" and 1"

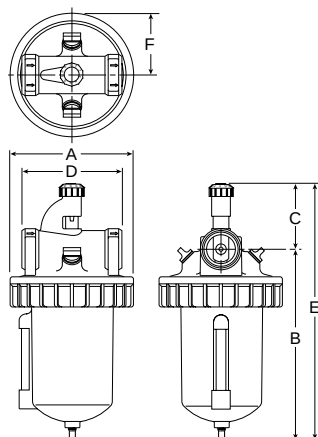


W & E size bowl

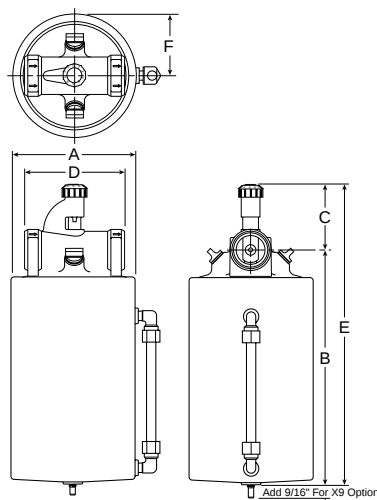


G size bowl

A	B	C	D	E	F
L606-06W, L606-08W					
4.97 (126)	7.25 (184)	2.63 (66.7)	4.06 (103)	9.88 (251)	2.48 (63.1)
L606-06E, L606-08E					
4.97 (126)	10.75 (273)	2.63 (66.7)	4.06 (103)	13.38 (340)	2.48 (63.1)
L606-06G, L606-08G					
5.00 (127)	9.40 (239)	2.62 (66)	4.06 (103)	12.02 (305)	2.50 (64)
inches (mm)					

L606 - 1-1/4" and 1-1/2"

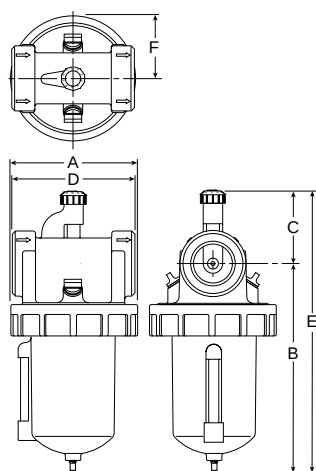

W & E size bowl

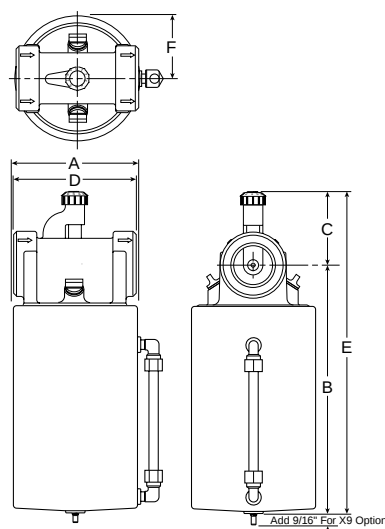

G size bowl

A	B	C	D	E	F
L606-10W, L606-12W					
4.97 (126)	7.63 (194)	2.84 (72.2)	4.81 (122)	10.47 (266)	2.48 (63.1)
L606-10E, L606-12E					
4.97 (126)	11.13 (283)	2.84 (72.2)	4.81 (122)	13.97 (355)	2.48 (63.1)
L606-10G, L606-12G					
5.00 (127)	7.99 (203)	2.84 (72.2)	4.81 (122)	12.80 (325)	2.50 (64)
inches (mm)					

Service kits

Description	L606
Adjusting knob	606Y72
Bowl kits –	
Aluminum (e) 32 oz	BK603B
Aluminum (g) 64 oz	BK606X30B
Zinc / sight gauge (w) 16 oz	BK609WB
Button head fill fitting (m14 male thread)	L606C14
Dip tube kit	DTK606
Drip spout kit	RK606SY
Mounting brackets –	
3/4 Inch units (2 required per unit)	SA200AW57
1 Inch units (2 required per unit)	SA200CW57
Oil –	
1 Quart	F442001
2 Quart case	F442003
4 Gallon case	F442005
Repair kits –	
Needle valve assembly (all)	RK606Y
Sight gauge bowl repair kit (w)	RKB605WB
Sight gauge bowl repair kit (g)	RKB606X30B