


Straight Couplings

Same Connections on Both Ends

A.Y. McDonald Service Fittings are made in the United States of America and are manufactured to meet or exceed the AWWA C800 (latest revision) standard. Our service fittings are rated to withstand the same pressures as the tubing they are designed to fit. They are designed and tested for cold potable water only. EPDM rubber gaskets are used in our compression fittings.

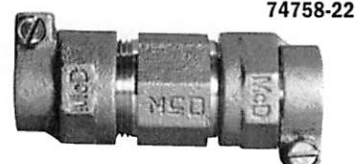

Size	Nut	MNPT	74758 Flare x Flare	74758-22 -22 CTS Compression x -22 CTS Compression	74758G G CTS Compression x G CTS Compression	74758Q Q CTS Compression x Q CTS Compression	74758T T CTS Compression x T CTS Compression
1/2"	1/2"	1/2"	●	●			
1/2" x 3/4"	1/2"	3/4"	●	●			
3/4"	3/4"	3/4"	●	●	●	●	●
3/4" x 1"	3/4"	1"	●	●	●	●	●
3/4" x 1 1/4"	3/4"	1 1/4"	●	●	●	●	●
1"	1"	1"	●	●	●	●	●
1" x 1 1/4"	1"	1 1/4"	●	●	●	●	●
1" x 1 1/2"	1"	1 1/2"	●	●	●	●	●
1 1/4"	1 1/4"	1 1/4"	●	●	●	●	●
1 1/4" x 1 1/2"	1 1/4"	1 1/2"	●	●	●	●	●
1 1/2"	1 1/2"	1 1/2"	●	●	●	●	●
1 1/2" x 2"	1 1/2"	2"	●	●	●	●	●
2"	2"	2"	●	●	●	●	●
2" x 1"	2"	1"		●			
2 1/2"	2 1/2"	2 1/2"		●			

Size	Nut	Nut	74758-33 -33 PEP Compression x -33 PEP Compression	74758-3G -3G PEP Compression x -3G PEP Compression	74758-3Q -3Q PEP Compression x -3Q PEP Compression	74758-44 -44 PVC Compression x -44 PVC Compression	74758-55 -55 IP Compression x -55 IP Compression
1/2"	1/2"	1/2"				●	
3/4"	3/4"	3/4"	●	●	●	●	●
3/4" x 1"	3/4"	1"	●	●	●	●	●
3/4" x 2"	3/4"	2"	●			●	●
1"	1"	1"	●	●	●	●	●
1 1/4"	1 1/4"	1 1/4"	●			●	
1 1/2"	1 1/2"	1 1/2"	●			●	●
2"	2"	2"	●			●	●

Size	Nut	Nut	74758-66 -66 Strong Lead Compression x -66 Strong Lead Compression	74758-67 -67 X Strong Lead Compression x -67 X Strong Lead Compression	74758-68 -68 XX Strong Lead Compression x -68 XX Strong Lead Compression
1/2"	1/2"	1/2"		●	
5/8"	5/8"	5/8"		●	●
3/4"	3/4"	3/4"	●	●	●
1"	1"	1"	●	●	
1 1/4"	1 1/4"	1 1/4"		●	

OPTIONS

- For Handyloc - Replace "Q" or "-3Q" with "H" or "-3H" in 3/4" & 1" only.
- For C903 tube - Replace "Q" with "K". On "Q" Series options only 3/4" x 1" only.
- For valve or fitting less flare nut add "L" to end of model number.
- CTS Anode (QA) & Flare Anode (A) - Replace "Q" with QA or add "A" to flare.
- Insert stiffeners are **required** on all flexible plastic connections. See page 23.
- See page 15 for Flare conversion adapters.