


## PRODUCT SPECIFICATIONS

## Malleable Iron Screwed Fittings - Class 150



BLACK

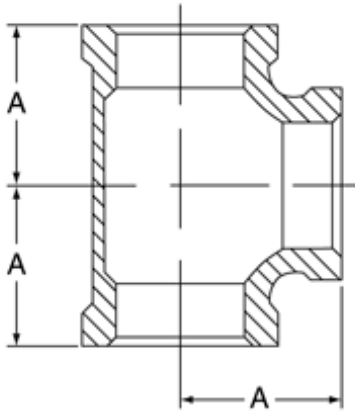

GALVANIZED



### STRAIGHT TEE

| Nominal Size    | Dimension A     | Approx. Wt. Each |
|-----------------|-----------------|------------------|
| <i>In. (mm)</i> | <i>In. (mm)</i> | <i>Lbs. (kg)</i> |
| 1/8             | 0.69            | 0.09             |
| 6               | 17.53           | 0.04             |
| 1/4             | 0.81            | 0.14             |
| 8               | 20.57           | 0.06             |
| 3/8             | 0.95            | 0.21             |
| 10              | 24.13           | 0.10             |
| 1/2             | 1.12            | 0.31             |
| 15              | 28.45           | 0.14             |
| 3/4             | 1.31            | 0.50             |
| 20              | 33.27           | 0.23             |
| 1               | 1.50            | 0.79             |
| 25              | 38.10           | 0.36             |
| 1 1/4           | 1.75            | 1.19             |
| 32              | 44.45           | 0.54             |
| 1 1/2           | 1.94            | 1.57             |
| 40              | 49.28           | 0.71             |
| 2               | 2.25            | 2.43             |
| 50              | 57.15           | 1.10             |
| 2 1/2           | 2.70            | 4.33             |
| 65              | 68.58           | 1.96             |
| 3               | 3.08            | 6.37             |
| 80              | 78.23           | 2.89             |
| 4               | 3.79            | 11.03            |
| 100             | 96.27           | 5.00             |
| 6               | 5.13            | 25.98            |
| 150             | 130.30          | 11.78            |

### MATERIAL SPECIFICATIONS

Dimensional: Fittings: ASME B16.3  
Unions: ASME B16.39  
Bushings/Plugs: ASME B16.14

Material: ASTM A-197

Galvanizing: ASTM A-153 (Hot Dip Galvanizing)

Threading\*: ASME B1.20.1

Pressure Rating: Fittings: ASME B16.3  
Unions: ASME B16.39  
Bushings/Plugs: ASME B16.14

Pressure Testing: All malleable iron fittings are tested for through wall porosity using an air under water process.

Agency Approvals: All malleable iron fittings and unions are UL Listed and FM Approved.

\* British Standard threading per BS 21 available upon request.



For Listings/Approval Details and Limitations, visit our website at [www.anvilintl.com](http://www.anvilintl.com) or contact an Anvil® Sales Representative.