

For Residential and Commercial Applications

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

BL12-**WA Speedi Plumb® PLUS Braided Washing Machine Connector – Female Hose Thread

Use: For use in potable water distribution systems in accessible locations only.

Design Features:

- **Superior corrosion resistance** to harsh chemicals found in common household cleaning and plumbing repair products
- **More flexible than stainless steel**, the braided polymer-coated fibers bend freely without kinking or crimping
- **Tough inner core** is reinforced to resist chlorine and chloramine leaching and deterioration
- **Nitrile rubber washers** provide a large pliable sealing surface and ensures a long lasting water tight connection
- **8-sided pneumatic crimp** provides greater dependability for realible nut-to-hose connections
- **100% Compliant** to California and Vermont “low-lead” requirements ✓

Operating Specifications:

Temperature: 40° - 140° F, intermittent to 180° F

Pressure: 125 psi maximum

Tubing Diameter: 0.450" I.D. (0.660" O.D.)

MATERIAL SPECIFICATIONS	
Inner Hose	EPDM or reinforced PVC
Braiding	PVC coated polyester yarn
Barbs	Compliant brass
Ferrules	Zinc plated 1008 steel
Nuts	C36000 brass
Washers	Nitrile rubber

Part Listing:


☐	BL12-48WA	3/4" Female Hose Thread x 3/4" Female Hose Thread x48" Length, sleeve
☐	BL12-48WA B	3/4" Female Hose Thread x 3/4" Female Hose Thread x48" Length, bulk
☐	BL12-48WA F	3/4" Female Hose Thread x 3/4" Female Hose Thread x48" Length, flag labeled
☐	BL12-60WA	3/4" Female Hose Thread x 3/4" Female Hose Thread x60" Length, sleeve
☐	BL12-60WA B	3/4" Female Hose Thread x 3/4" Female Hose Thread x60" Length, bulk

This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.

400.112 BL12-**WA SPP Braided Washing Machine Connector REV 01/11

BrassCraft®

© 2011 Brass-Craft Mfg.

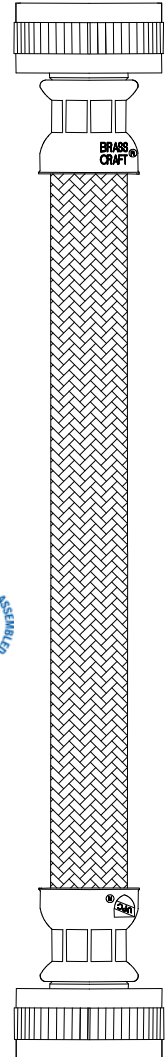


Patents
5,803,129 &
5,899,236

BL12-**WA Speedi Plumb® PLUS Braided Washing Machine Connector – Female Hose Thread

Part Listing (con't):

- | | | |
|--------------------------|---------------|--|
| ☐ | BL12-60WA PX2 | 3/4" Female Hose Thread x 3/4" Female Hose Thread x60" Length, 2 per bag, cutcase of 5 |
| ☐ | BL12-72WA | 3/4" Female Hose Thread x 3/4" Female Hose Thread x 72" Length, sleeve |
| ☐ | BL12-72WA B | 3/4" Female Hose Thread x 3/4" Female Hose Thread x 72" Length, bulk |
| ☐ | BL12-72WA F | 3/4" Female Hose Thread x 3/4" Female Hose Thread x 72" Length, flag labeled |

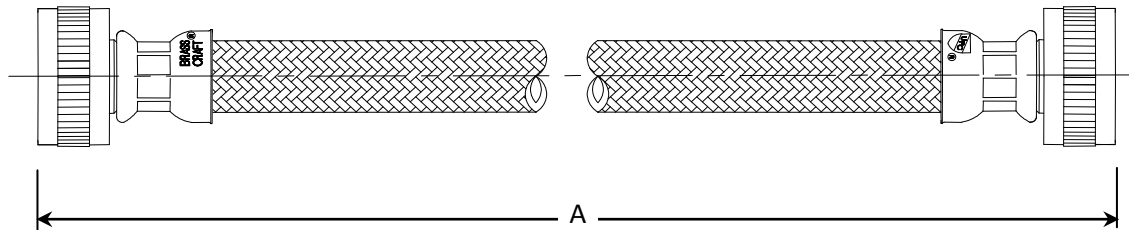

PART DIMENSIONS (Inches)	
Model	DIM. A
BL12-48WA	48.0 / 49.0
BL12-60WA	60.0 / 61.0
BL12-72WA	72.0 / 73.0

Listings & Certifications:

- IAPMO listed to ASME A112.18.6-2003 (File # 0452)
- CSA listed to ASME A112.18.6-2003 / CSA B125 (File # 204593)
- CSA approved to California Health & Safety Code 116875 and Vermont Bill S.152 (Project # 2174785)



This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.

BrassCraft®