For Residential and Commercial Applications			
Job Name	Engineer / Architect		
Job Location	Wholesaler		
Submittal Date	Contractor		

## SL12-\*\*WA Stainless Steel Flexible Braided Washing Machine Water Connector – Garden Hose Inlet

*Use:* For use in potable water distribution systems in accessible locations only

## **Design Features:**

- Tough inner core is reinforced to resist chlorine and chloramine leaching and deterioration
- Plated brass nuts for durability
- Rubber washer ensures a universal fit and long lasting water-tight connection
- 8-sided pneumatic crimp ensures realible nut-to-hose connection
- No Lead




**Temperature:** 40°- 140° F, intermittent to 180° F

**Pressure:** 125 PSI maximum

**Tubing Diameter:** 0.300" ID (0.550" OD)

MATERIAL SPECIFICATIONS		
Inner Hose	Reinforced PVC	
Braiding	Stainless steel wire	
Barb	Brass	
Ferrule	Zinc plated steel	
Nut	Brass, chrome plated	
Washer	Rubber	



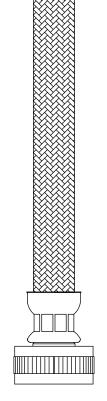


	rt			

	SL12-48WA F	3/4" female hose thread x 3/4" female hose thread x 48" ler	ngth
	SL12-60WA F	3/4" female hose thread x 3/4" female hose thread x 60" ler	ngth
Γ	SL12-72WA F	3/4" female hose thread x 3/4" female hose thread x 72" ler	ngth



## SL12-\*\*WA Stainless Steel Flexible Braided Washing Machine Water Connector – Garden Hose Inlet

PART DIMENSIONS (Inches)		
Model	Dim. A	
SL12-48WA	48.0 / 49.0	
SL12-60WA	60.0 / 61.0	
SL12-72WA	72.0 / 73.0	

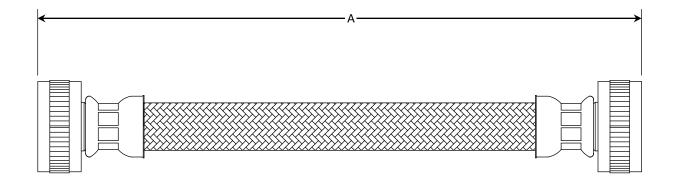

## **Listings & Certifications:**

- CSA listed to ASME A112.18.6 and CSA B125.6 (File #204593)
- IAPMO listed to ASME A112.18.6 and CSA B125.6 (File # 0452)
- Compliant product CSA listed to Low Lead Content Certification
  Program Plumbing Products Class 6853-01
- Tubing material is formulated with food grade ingredients and certified by NSF to standard 51 Food Equipment Materials







