



# NEW PRODUCTS

FG-1A-1009



## FlameGuard™ TorqueSafe™ GASKET SEALED HEAD ADAPTER

The CPVC Fire Sprinkler Head Adapter  
You've Been Waiting For...

- Eliminates Radial Stress
- Requires NO Thread Sealants
- Eliminates Sealant Incompatibility
- Prevents Over Tightening
- Provides Easy Frame Alignment
- UL® Listed, FM Approved



**Compatible with all Brands of Approved CPVC Fire Sprinkler Products**

Spears® **TorqueSafe™** revolutionary design features a special molded-in-place Brass Thread Insert fitted with an elastomer gasket seal at the base of the threads. The gasket seal allows a modified thread design that eliminates radial stress and associated problems typical with tapered thread joint make up. The insert is designed to rotate during head installation for easy sprinkler frame alignment without over tightening!

**Training Requirements:** Due to the unique advantages of this product, Spears® requires and will provide contractor training free of charge prior to sale and use of the **TorqueSafe™** product. Contact your nearest Spears® Regional Distribution Center for details.

### TorqueSafe™ Female Sprinkler Head Adapter - Gasket Sealed Brass Thread Insert Style Socket x Gasket FIPT

Part Number	Size	Std Pk	Mstr Ctn	Disc Code	Price Each
4235-130GS	1X1/2	50	0	076	13.54
FIPT With Elastomer Seal - Use NO Thread Sealant					

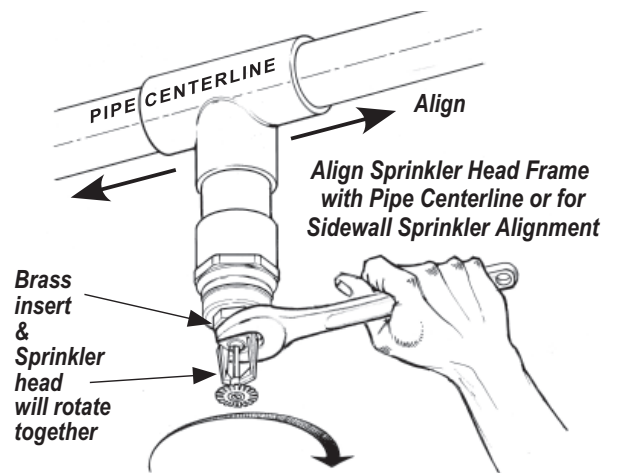

Part Number	Size	L	M	M1	N	Approx. Wt. (Lbs.)
4235-130GS	1x1/2	2	1-11/16	1-3/8	5/8	.17

**NOT FOR USE WITH COMPRESSED AIR OR GAS**  
**Progressive Products From Spears® Innovation & Technology**



**SPEARS® MANUFACTURING COMPANY • CORPORATE OFFICE**

15853 Olden St., Sylmar, CA 91342 • PO Box 9203, Sylmar, CA 91392

(818) 364-1611 • [www.spearsmfg.com](http://www.spearsmfg.com)

