



The Professional's Choice

King Bros. Industries

29101 The Old Road, Valencia, CA 91355


Toll Free: (800) 325-9468 Fax: (661) 257-4320

E-mail: valves@kbico.com Web: www.kbico.com

PVC Compression Couplings

Features:

- Molded in the **USA** by Kbi.
- Pressure Rated to 150 psi @ 73° F
- Nominal operating pressure.
- NSF listed.
- IAPMO (UPC) listed.
- Meets/exceeds ASTM D-1784 & ASTM D-2000
- Made with HI-Impact PVC Type II material.
- Available in CPVC.
- Available in CTS dimensions.

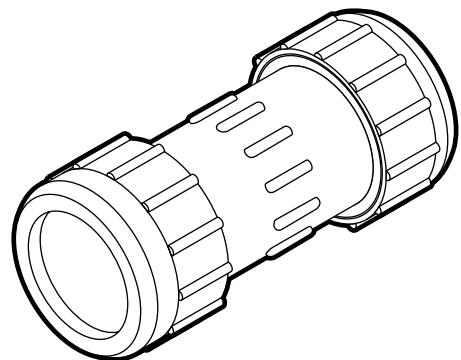

Model	Size	Description	L	D	Case	W	List
CPC-0500	1/2"	COMP x COMP-IPS	5 1/4"	1 3/4"	30	7.8	\$ 2.30
CPC-0750	3/4"	COMP x COMP-IPS	5 1/2"	2"	24	7.9	\$ 3.10
CPC-1000	1"	COMP x COMP-IPS	5 3/4"	2 3/8"	18	7.9	\$ 4.00
CPC-1250	1 1/4"	COMP x COMP-IPS	6 1/4"	2 3/4"	12	7.1	\$ 6.20
CPC-1500	1 1/2"	COMP x COMP-IPS	7"	3"	15	11.8	\$ 6.40
CPC-2000	2"	COMP x COMP-IPS	7 1/8"	3 5/8"	12	13.8	\$ 8.40
CPC-2500	2 1/2"	COMP x COMP-IPS	9 7/8"	4 1/2"	5	12.2	\$15.00
CPC-3000	3"	COMP x COMP-IPS	10 7/8"	5 1/4"	4	13.0	\$19.65
CPC-4000	4"	COMP x COMP-IPS	12 1/4"	6 1/4"	3	14.3	\$32.30
CPC-6000	6"	COMP x COMP-IPS	11 1/4"	8 7/8"	1	7.8	\$73.30

FEATURES COMMON TO KBI PVC PRODUCTS

- NSF listed *
- IAPMO (UPC) listed *
- Molded in the USA by KBI
- Limited LIFETIME Warranty
- 150 psi working pressure (tested to 500 psi static @ 72°F)
- Meets/Exceeds ASTM Standards
- Made with Hi-Impact PVC Type II Cell Class 15344-C
- * See individual products for details

