


data sheet

ARGCO



KYDEX® SPLIT RING

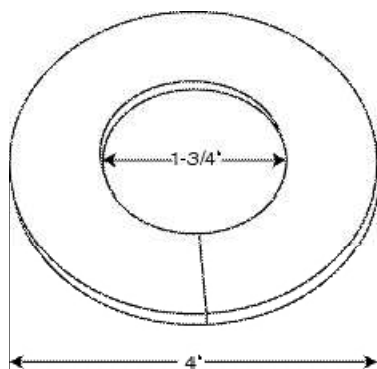

Conceal oversized holes & cutting errors in ceiling tile

Fire resistant plastic 1/32" thick

Simply flex open and install around existing sprinkler drop.

Custom sizes available

4515500: Kydex Split Ring 4" OD x 1-3/4" ID x 1/32" thick

4515501: Kydex (no split) Ring 4" OD x 1-3/4" ID x 1/32" thick

4515502: Kydex Sheet .028 thick 48"x 96"

4515503: Kydex Special Cut, Call for Size Requirements and Pricing

KYDEX® is a thermoplastic sheet that is cost competitive with fire retardant ABS/PVC (FR-ABS) formulations but with significantly higher impact strength and extensibility. Microban® protection is built-in to continuously fight the growth of microbes.

Flammability as tested under ASTM E-662 and ASTM E-162.

Heat Deflection Temperature (HDT) @ 1.8 MPa (264 psi) annealed: 172°F (77.8°C)

Flammability:

Independent Laboratory Testing	UL Standard 94	V.O
Federal Aviation Administration	FAR 25.853 (a)	Pass
Motor Vehicle Safety Standard	FMVSS 302	Pass
Radiant Panel, Is	ASTM E-162	< 35
Smoke Generation	ASTM E-662	<100 @1.5min < 200 @4.0 min
Fire Behavior Classification	DIN 5510-2	0.9mm (S4, ST2, SR2) 6.80mm (S4, ST2, SR2)

Certifications:

UL Std. 94 V-0 (listed) (File E115252)

UL Std. 95 5V (listed)

UL 746C for Signage (listed)

FAR 25.853 (a) 60s, 12s (Aircraft Rating)

FMVSS 302 (Mass Transit Rating)

ASTM E-162 Flame Spread Index (Mass Transit Rating)

The information contained herein is produced in good faith and is believed to be reliable but is for guidance only. ARGCO and its agents cannot assume liability or responsibility for results obtained in the use of its product by persons whose methods are outside or beyond our control. It is the user's responsibility to determine the suitability of any of the products, methods of use, or preparation prior to use, mentioned in our literature. It is the user's responsibility to observe and adapt such precautions as may be advisable for the protection of personnel and property in the handling and use of any of our products.

**FOR MORE INFORMATION CALL ARGCO AT 1-800-854-1015
OR LOG ONTO WWW.ARGCO.COM**