
SAMMYS® FOR CONCRETE

3/8'

SAMMYS® FOR CONCRETE - Vertical Application

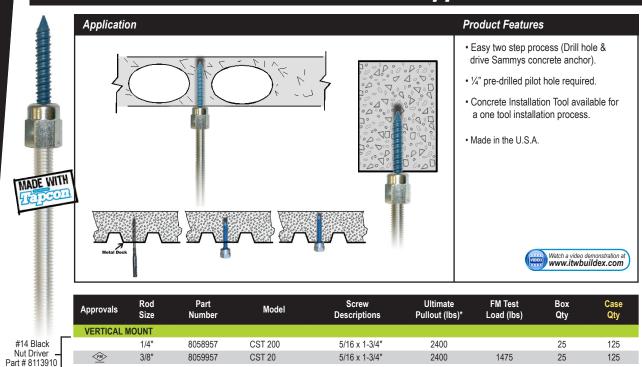

^{*} Tested in 3000 PSI concrete

125

125

25

25

SIDEWINDER® FOR CONCRETE - Horizontal Application


CST 20-SS

CST 2



#14SW Red

Nut Driver = Part # 8114910



8145925

Product Features

2400

2400

- Easy two step process (Drill hole & drive Sammys concrete anchor).
- 1/4" pre-drilled pilot hole required.
- Concrete Installation Tool available for a one tool installation process.
- Made in the U.S.A.





Part # 8114910

Approvals	Rod Size	Part Number	Model	Screw Descriptions	Ultimate Pullout (lbs)*	FM Test Load (lbs)	Box Qty	Case Qty
HORIZONTAL MOUNT								
	1/4"	8062957	SWC 200	5/16 x 1-3/4"	2450		25	125
FM	3/8"	8061957	SWC 20	5/16 x 1-3/4"	2450	1475	25	125
неческая	3/0	0001337	0VVO 20	3/10 X 1-3/ 1	2430	1473	20	120

5/16 x 1-3/4"

5/16 x 1-3/4"









SPECIAL NUT DRIVER SYSTEM: The nut drivers were designed with a unique spin-off feature which provides a fast and safe installation each time. When the face of the driver comes into contact with the material you are installing into, continue drilling until nut driver spins free. Installation is then complete. Warranty requires the use of the appropriate nut driver for installations.

^{*} Tested in 3000 PSI concrete