


**DIRECT VENT / SIDEWALL - CATEGORY IV VENTING  
PVC / CPVC WITH CONCENTRIC VENT KITS (400-601 ONLY).**

The exhaust piping terminates out the sidewall. The combustion air piping terminates out the sidewall.

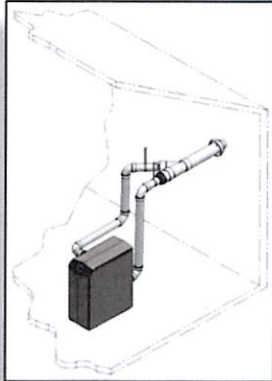

**BULLET POINTS**

- This is Category IV venting, positive pressure, condensing stack.
- All joints and seams must be sealed gastight and may not be common vented.
- The concentric vent termination is provided by Lochinvar and all other vent material are obtained locally.
- Maximum distance – 100 equivalent feet of vent.
- Maximum distance – 100 equivalent feet of air intake.

Model	Kit Number	Equivalent vent length
KBN 400	CVK3007	5 Feet (1.5 m)
KBN 501	CVK3007	30 Feet (9 m)
KBN 601	CVK3007	30 Feet (9 m)

