


Check Valves - Flo Control



PVC Swing Check Valve Features:

- No metallic parts, corrosion resistant..
- Full flow design.
- Angle seat and weighted flapper designed for low pressure seal.
- PVC weighted and shielded flapper will retain backpressure up to 125 psi.
- Iron pipe sized 1/2" - 4".
- Compression style for IPS sized plastic or metal pipe 1 1/4" - 3"
- Ideal for close working areas, easy pipe alignment.
- Compression ends can be used as union connections.
- Designed for both horizontal and vertical use.
- Pressure rated 125 psi @ 72 °F.
- NSF approved.

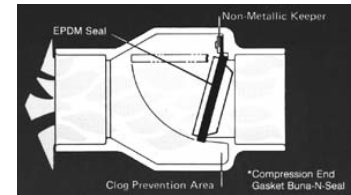

1500 Series

NSF61
Annex G



1520 Series

NSF61
Annex G



1520C Series



1720 Series



1720C Series

Part Number	IPS Size	Body Length	Ctn Qty	List Price
PVC Swing Check Valve - WHITE comp x comp				
1500-12	1-1/4"	7-1/2"	12	\$ 42.20
1500-15	1-1/2"	7-1/2"	12	47.15
1500-20	2"	9-3/4"	12	66.35
1500-30	3"	14"	2	169.85
PVC Swing Check Valve - CLEAR comp x comp				
1500C-15	1-1/2"	7-1/2"	5	54.97
1500C-20	2"	9-3/4"	8	81.49
PVC Swing Check Valve - WHITE slip x slip				
1520-05	1/2"	4-1/2"	25	27.20
1520-07	3/4"	4-1/2"	25	27.70
1520-10	1"	5-1/8"	25	28.68
1520-12	1-1/4"	5-1/4"	12	30.51
1520-15	1-1/2"	5-3/4"	12	31.48
1520-20	2"	6"	12	48.12
1520-30	3"	9"	4	85.78
1520-40	4"	9-1/2"	4	121.20
PVC Swing Check Valve - CLEAR slip x slip				
1520C-10	1"	5-1/8"	1	39.63
1520C-12	1-1/4"	5 1/4"	1	42.03
1520C-15	1-1/2"	5 3/4"	12	45.15
1520C-20	2"	6"	12	65.09
True Union Swing Check Valves - WHITE slip x slip				
1720-15	1 1/2"		12	34.47
1720-20	2"		12	50.35
True Union Swing Check Valves - CLEAR BODY, WHITE NUTS/TAILS slip x slip				
1720C-10	1"		20	39.08
1720C-15	1 1/2"		12	49.63
1720C-20	2"		12	67.63
1720C-30	3"		20	134.13