

WRENCHES & LOCKING DEVICES

LUBRICATED PLUG VALVES – LIST PRICES

WRENCH SIZE AND DIMENSIONS

SIZE	Square	Length	Approx. Wt. - Lbs.	Full Port and Diamond Port	Round Port	Reduced Port 602	Standard Opening 612	Full Port 603-606
F	1 ³ / ₁₆ "	8 ¹ / ₈ "	1 ¹ / ₄ "	1 ¹ / ₂ " — 3 ¹ / ₄ "	1 ¹ / ₂ "	—	1"	1 ¹ / ₂ "
G	1 ⁵ / ₁₆ "	9 ⁹ / ₁₆ "	1 ¹ / ₂ "	1" — 1 ¹ / ₂ "	3 ³ / ₄ " — 1 ¹ / ₂ "	—	1 ¹ / ₄ " — 2"	3 ³ / ₄ " — 1 ¹ / ₂ "
E	1 ¹ / ₄ "	10 ¹ / ₂ "	2 ³ / ₄ "	2" — 2 ¹ / ₂ "	—	—	2 ¹ / ₂ " — 3"	2" — 2 ¹ / ₂ "
L1	1 ¹⁷ / ₃₂ "	17 ²⁷ / ₃₂ "	3 ¹ / ₂ "	3"	2" — 2 ¹ / ₂ "	—	4	—
N	2 ¹ / ₃₂ "	*	*	4–5–6"	3"	—	5–6–8–10"	3–4"
P	2 ¹⁵ / ₃₂ "	*	*	8–10"	4–6–8"	10–12"	12–14"	6–8"

*Size optional—order in inches


WRENCH SIZES E, F, G & L



DOUBLE END WRENCH SIZE AND DIMENSIONS

SIZE	FF	EE	LL	NN	PP	GG
Square	1 ³ / ₁₆ "	1 ¹ / ₄ "	1 ¹⁷ / ₃₂ "	2 ¹ / ₃₂ "	2 ¹⁵ / ₃₂ "	1 ⁵ / ₁₆ "
Length	16 ¹ / ₄ "	19 ³ / ₄ "	—	—	—	RTF
Approx. Wt.-Lb.	1 ⁵ / ₈	4 ⁵ / ₈	8 ¹ / ₂	15	35	RTF

WRENCH SIZES N & P

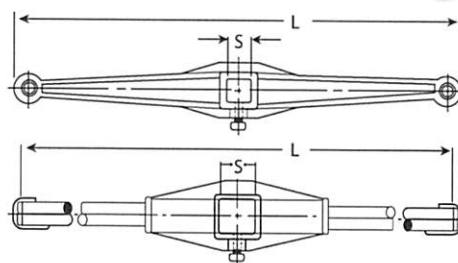

LOCKING & SEALING AND WRENCH LOCKING DEVICES

VALVE SIZE	FIG. NO.	LOCKING & SEALING DEV.	TYPE OF VALVE		WRENCH LOCKING DEV.	TYPE OF VALVE	
			Full Port	Std. Opening		Full Port	Std. Opening
1 ¹ / ₂ "	601, 641, 651	LSD #1	32	32	N/A	N/A	N/A
3 ³ / ₄ "	601, 641	"	32	32	"	"	"
1"	611, 612	"	32	32	"	"	"
1 ¹ / ₄ "	651, 652	LSD #2	32	32	N/A	N/A	N/A
1 ¹ / ₂ "	651, 652	"	32	32	"	"	"
3 ³ / ₄ "	651	LSD #3	32	32	N/A	N/A	N/A
1"	601, 602, 641, 651, 652	"	32	32	"	"	"
1 ¹ / ₄ "	601, 602, 611, 612, 641	"	32	32	"	"	"
1 ¹ / ₂ "	601, 602, 611, 612, 641, 642	"	32	32	"	"	"
2"	611, 612	"	32	32	"	"	"
2"	601, 602, 641, 642	E-LS	44	44	E-WL	68	68
2 ¹ / ₂ "	601, 602, 611, 612, 641, 642	"	44	44	"	68	68
3"	611, 612	"	44	44	"	68	68
2, 2 ¹ / ₂ "	651, 652	L-LS	83	83	L-WL	97	97
3"	601, 602, 641, 642	"	83	83	"	97	97
4"	611, 612	"	83	83	"	97	97
3"	651, 652	N-LS	120	120	N-WL	134	134
4"	601, 602, 641, 642	"	120	120	"	134	134
5"	602, 602A, 612, 642	"	120	120	"	134	134
6"	602, 602A, 612, 612A, 642, 622A	"	120	120	"	134	134
8"	612, 612A	"	120	120	"	134	134
10"	612A	"	120	120	"	134	134
4"	651A, 652	P-LS	168	168	P-WL	184	184
6"	652A	"	168	168	"	184	184
8"	602A, 622A, 642A, 652A	"	168	168	"	184	184
10"	602A, 622A, 642A	"	168	168	"	184	184
12"	602A, 622A, 612A	"	168	168	"	184	184

Locking devices may be added without valve modification. For straightway valves, locking device sizes are the same as the corresponding wrench size. Specify by letter.


Homestead Locking and Sealing Device (Patented)

Specify "LS" after wrench letter



Homestead Wrench Locking Device (Patented)

Specify "WL" after wrench letter



Sizes requiring "N" or "P" wrench have pin and lock arrangement.

In some instances pictures shown do not represent the lubrication fitting currently being sold.