


2XL PRODUCT RANGE



Ball Valve

SIZE	P/N
1-1/4"	SBBV35
1-1/2"	SBBV41
2"	SBBV54

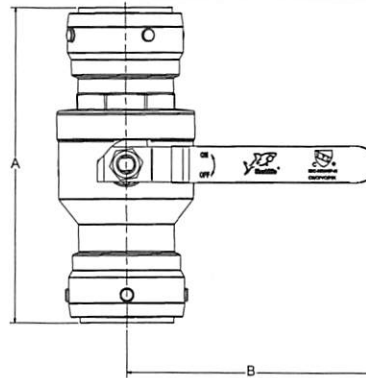


Ball Valve

P/N	Size	A	B	Weight
SBBV35	1-1/4"	6.08"	5.10"	2.06
SBBV41	1-1/2"	6.79"	6.10"	2.99
SBBV54	2"	7.58"	6.16"	4.45



Shark Shifter De-Mount Tools

SIZE	P/N
1-1/4" DE-Mount Clip	SBDC35
1-1/2" DE-Mount Clip	SBDC41
2" DE-Mount Clip	SBDC54
Shifter Set De-MOUNT Tools	SBDC354154



Shark Shifter De-Mount Tools


P/N	Size	A	Weight
SBDC35	1-1/4"	2.70"	0.07
SBDC41	1-1/2"	2.94"	0.08
SBDC54	2"	2.45"	0.09



PEX Stiffener

SIZE	P/N
1-1/4"	SBTL35
1-1/2"	SBTL41
2"	SBTL54

* All weights are in pounds



Pex Stiffener

P/N	Size	A	B	Weight
SBTL35	1-1/4"	1.65"	1.34"	0.08
SBTL41	1-1/2"	1.89"	1.59"	0.10
SBTL54	2"	2.09"	2.09"	0.15



All SharkBite 2XL Fittings are supplied in individual sealed bags for protection and ensure the fittings remain clean and free of dirt or debris only remove from the bag just prior to installation.

SPECIFICATION DATA

Body	DZR Brass-Lead Free Alloy.
O Ring	Chloramine resistant EPDM.
Tube Liner	Copper.
Grab Ring	316 Stainless Steel.
Locking Ring	PSU/PPSU Blend.
BV Cap	DZR Brass-Lead Free Alloy.
BV Ball	316 Stainless Steel.
BV Spindle	DZR Brass-Lead Free.
BV Seat	PTFE.
BV Handle	Mild Steel.

CONNECTIONS

Tube Connections	CTS.
Threaded Connections	Male or Female NPT.
Street Connections	CTS.

CERTIFICATIONS

IAPMO IGC 157: Ball Valves - This standard covers material, testing, dimensional and performance requirements. ASSE1061: Fittings- Performance requirements for removable & non-removable push-fit fittings.