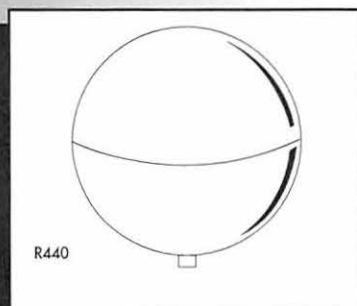


BOB® COPPER FLOATS & BRASS ADAPTERS


BOB® Copper Float Balls consist of two float halves soldered together using an inside lapping joint.
For open tank service only. 10" & 12" floats special order w/extended lead time.

**R440 SERIES COPPER FLOATS**

PART NUMBER	FLOAT DIAMETER	BUOYANCY IN LBS.	FEMALE SPUD CONNECTION	WEIGHT LBS.
R440-3	3"	.34	1/4-20 SAE	.19
R440-4	4"	.80	1/4-20 SAE	.38
R440-5	5"	1.73	1/4-20 SAE	.56
R440-6	6"	3.26	1/4-20 SAE	.69
R441-6	6"	3.26	5/16-18 SAE	.69
R442-6	6"	3.26	3/8-16 SAE	.69
R440-7	7"	5.72	3/8" FIP	1.38
R441-7	7"	5.72	5/16-18 SAE	1.38
R442-7	7"	5.72	5/16-18 SAE	1.38
R440-8	8"	8.03	3/8" FIP	1.94
R442-8	8"	8.03	3/8-16 SAE	1.94
R440-10	10"	16.66	1/2" FIP	3.25
R442-10	10"	16.66	3/8-16 SAE	3.25
R440-12	12"	28.38	3/4" FIP	4.50
R442-12	12"	28.38	3/8-16 SAE	4.50

Float with thru-hole available upon request (except 12"). Thru hole for • 1/4" dia rod (.325 I.D. hole) add suffix "SR-250". • 3/8" dia rod (.450 I.D. hole) add suffix "SR-375". • 1/2" dia rod (.635 I.D. hole) add suffix "SR-500". • Add 50% to list, special order, no return/cancel. Allow 4-6 weeks for delivery.

PART NUMBER	FLOAT DIAMETER	LENGTH	BUOYANCY IN OZS.	FEMALE SPUD CONNECTION	WEIGHT OZS.
RM141 (COPPER)	4"	7"	35.00	1/4-20 SAE	9.58


**R209 SERIES Adapter**

PART NUMBER	THREAD COMBINATION
R209-3/8X1/8	3/8" MIP X 1/8" FIP
R209-3/8X1/4	3/8" MIP X 1/4" FIP

102263 SERIES Adapter


• Adapts 8-32 Stem to 1/4-20 SAE MALE for Larger Floats

PART NUMBER
102263-1 (BRASS)
102263-2 (STAINLESS STEEL)

**R434 SERIES PLUG Adapter**

• Plug to Adapt Machine Thread Stems to Floats Having Pipe Threads

PART NUMBER	THREAD COMBINATION	PART NUMBER	THREAD COMBINATION
R434-0	1/4-20 SAE X 3/8" MIP	R434-11	3/8-16 SAE X 3/8" MIP
R434-1	5/16-18 SAE X 3/8" MIP		

**R435 SERIES Adapter**

PART NUMBER	THREAD COMBINATION
R435-1	1/4-20 SAE X 1/8" FIP
R435-4	1/4-20 SAE X 5/16-18 SAE FEM
R435-5	1/4-20 SAE X 3/8-16 SAE FEM