


Clamps

Heavy Duty I-Line Clamps - 13ILH

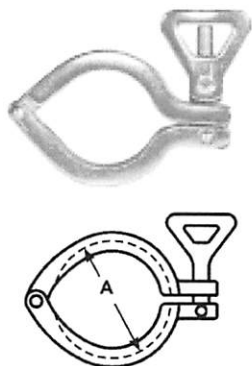

Tube O.D.	Dimension A	Service Pressure Rating at 70°F	Service Pressure Rating at 250°F	Part Number
1" - 1½"	2.122	700 PSI	250 PSI	13ILH100-150
2"	2.654	450 PSI	250 PSI	13ILH200
2½"	3.185	450 PSI	200 PSI	13ILH250
3"	3.717	350 PSI	150 PSI	13ILH300
4"	4.820	200 PSI	125 PSI	13ILH400
6"	7.689	150 PSI	100 PSI	13ILH600
8"	9.689	125 PSI	75 PSI	13ILH800

Bolted I-Line Clamps - 13ILB



Tube O.D.	Dimension A	Service Pressure Rating at 70°F	Service Pressure Rating at 250°F	Part Number
1" - 1½"	2.122	1220 PSI	1100 PSI	13ILB100-150
2"	2.654	900 PSI	830 PSI	13ILB200
2½"	3.185	720 PSI	660 PSI	13ILB250
3"	3.717	600 PSI	550 PSI	13ILB300
4"	4.820	570 PSI	525 PSI	13ILB400
6"	7.689	300 PSI	200 PSI	13ILB600
8"	9.689	250 PSI	150 PSI	13ILB800

Note: 6" and 8" use a two-bolt configuration. The nuts must be tightened to 25 ft.lbs.


Ferrules

Male I-Line Short Weld Ferrules - 14WI



Tube O.D.	Dimension A	304 Part Number	316L Part Number
1"	.600	14WI-G100	14WI-R100
1½"	.765	14WI-G150	14WI-R150
2"	.790	14WI-G200	14WI-R200
2½"	.848	14WI-G250	14WI-R250
3"	.906	14WI-G300	14WI-R300
4"	1.031	14WI-G400	14WI-R400
6"	.940	-	14WI-R600
8"	.940	-	14WI-R800

Male I-Line Long Weld Ferrules - 14WLI

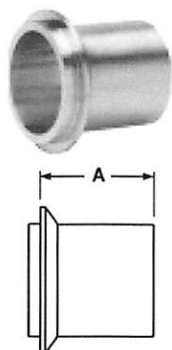

Tube O.D.	Dimension A	304 Part Number	316L Part Number *
1"	1.562	14WLI-G100	14WLI-R100
1½"	1.843	14WLI-G150	14WLI-R150
2"	2.062	14WLI-G200	14WLI-R200
2½"	2.188	14WLI-G250	14WLI-R250
3"	2.375	14WLI-G300	14WLI-R300
4"	2.688	14WLI-G400	14WLI-R400
6"	2.688	14WLI-G600	14WLI-R600