



FEATURES:

- Vandal-resistant and Easy Maintenance
 - Components housed above counter
 - Integral hot and cold mixing valves
 - Hot and cold check valves and filters
 - Pre-assembled
 - All metal housing
 - 0.5 gpm (1.9 L/min) and 1.5 gpm (5.7 L/min) flow controls
 - 60 second flow time out feature
 - Cap provided for tempered water installation
 - Lead free brass construction standard for S-9010
- S-9010 Battery Powered
- S-9020 AC Powered

COMPLIANCE:

- Meets existing ASME A112.18.1/CSA B125.1 and WaterSense standards



AVAILABLE FINISHES:

- Polished Chrome (standard)

OPTIONS:

- Two (2) stainless steel flexible supply hoses to supply stops -HS
- One (1) stainless steel hose for tempered water systems (S-8700, S-8710, & S-8720 only) -HTS
- 1.5 gpm laminar flow control outlet -LF
- Less transformer -LT
- Under counter thermostatic mixing valve -TMV-CA
- Vandal-resistant screws for removable cover and custom wrench -VRS

WARRANTY:

- 1 year limited

SEE REVERSE FOR ROUGH-IN DIMENSIONS

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL.

SPEAKMAN®

400 ANCHOR MILL ROAD | NEW CASTLE, DE 19720
P: 800-537-2107 | F: 800-977-2747
WWW.SPEAKMANCOMPANY.COM

REVISION DATE: SEPTEMBER 2013



Management Systems
Registered to ISO 9001


275

SPEAKMAN®




Sensorflo® S-9010-CA, S-9020-CA

SPECIFICATION

S-9010-CA

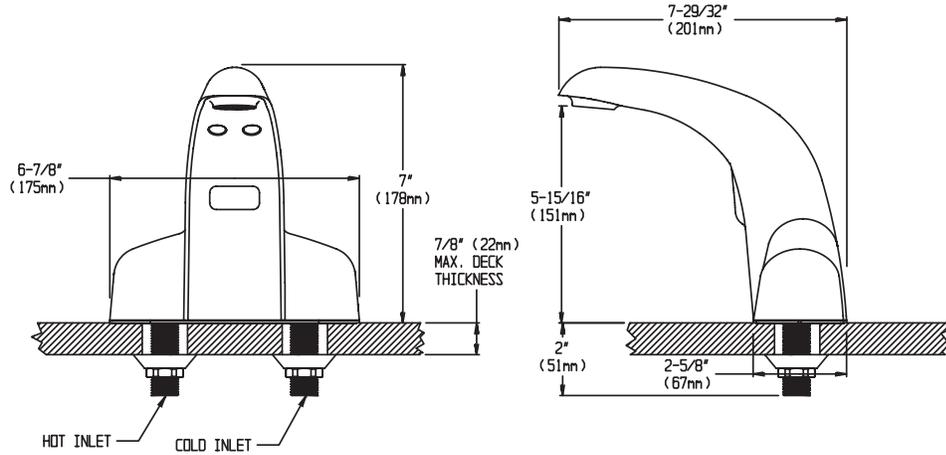

S-9020-CA

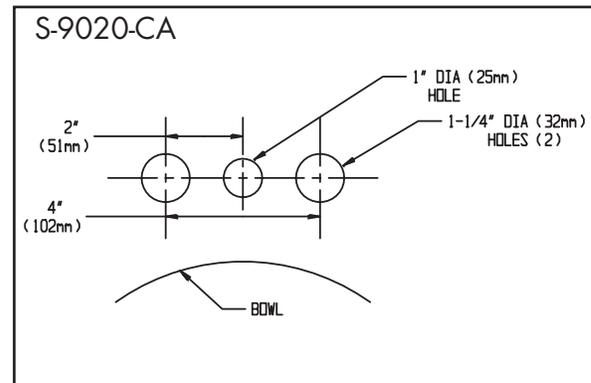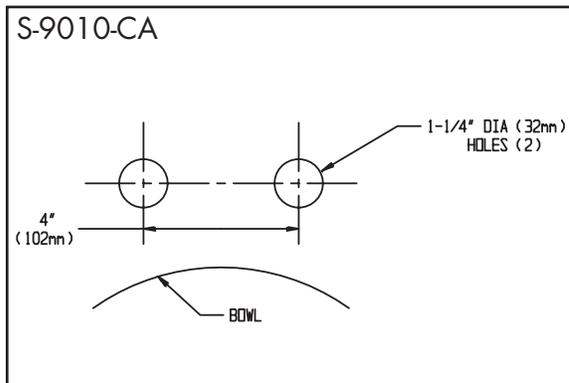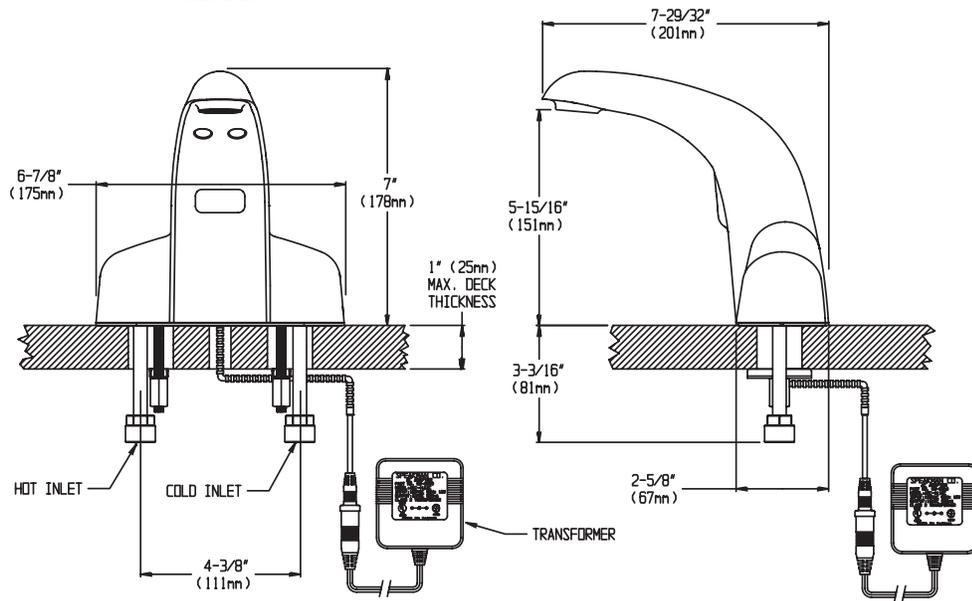

NOTE: 1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice. 2. Inlet is 3/8" compression with male threads. 3. Position faucet as close to the edge of the sink as possible

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL.

SPEAKMAN®

400 ANCHOR MILL ROAD | NEW CASTLE, DE 19720
 P: 800-537-2107 | F: 800-977-2747
 WWW.SPEAKMANCOMPANY.COM



Management Systems
 Registered to ISO 9001

REVISION DATE: SEPTEMBER 2013