




DIMENSIONAL DATA

Sockolet

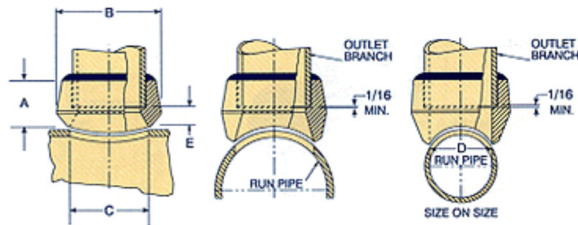

REDUCING SIZES							
	Outlet Size Inches	Dimensions					Appx. Wt Pounds
		A	B	C	D	E	
CL 3000	1/8	3/4	1	5/8	0.269	9/32	0.10
	1/4	3/4	1	5/8	0.364	9/32	0.10
	3/8	13/16	1 1/4	3/4	0.493	7/16	0.20
	1/2	1	1 13/32	29/32	0.622	9/16	0.30
	3/4	1 1/16	1 23/32	1 5/32	0.824	9/16	0.35
	1	1 5/16	2	1 7/16	1.049	25/32	0.60
	1 1/4	1 5/16	2 9/16	1 3/4	1.380	3/4	0.85
	1 1/2	1 3/8	2 27/32	2	1.610	3/4	1.00
	2	1 1/2	3 15/32	2 9/16	2.067	13/16	1.60
	2 1/2	1 9/16	4 1/16	3	2.469	3/4	2.75
	3	1 3/4	4 13/16	3 11/16	3.068	15/16	3.80
	3 1/2	2 1/8	5 7/32	4	3.548	1	4.30
	4	1 7/8	5 31/32	4 3/4	4.026	1 1/16	7.25
	5	2 5/8	7 5/16	5 9/16	5.047	1 11/32	12.00
	6	2 3/4	8 5/8	6 11/16	6.065	1 13/32	14.50
CL 6000	1/2	1 1/4	1 23/32	3/4	0.466	7/8	0.50
	3/4	1 7/16	1 61/64	1	0.614	7/8	0.80
	1	1 9/16	2 7/16	1 5/16	0.815	15/16	1.30
	1 1/4	1 5/8	2 23/32	1 1/2	1.160	13/16	1.60
	1 1/2	1 11/16	3 1/4	1 15/16	1.338	7/8	2.00
	2	2 1/16	4 1/32	2 3/4	1.689	1 3/16	5.15
Size on Size							
	Outlet Size Inches	Dimensions					Appx. Wt in Pounds
		A	B	C	D	E	
CL3000	1/2	1	1 3/8	15/16	0.622	17/32	0.15
	3/4	1 1/16	1 5/8	1 3/16	0.824	15/32	0.25
	1	1 5/16	2	1 7/16	1.049	23/32	0.45
	1 1/4	1 5/16	2 3/8	1 3/4	1.380	9/16	0.65
	1 1/2	1 3/8	2 7/8	2	1.610	21/32	0.85
	2	1 1/2	3 1/2	2 9/16	2.067	15/16	1.40
	2 1/2	1 9/16	4 1/16	3	2.469	3/4	2.25
	3	1 3/4	4 13/16	3 11/16	3.068	15/16	3.75
	3 1/2	1 11/16	5 3/8	4 7/16	3.548	11/16	4.30
	4	1 7/8	6 1/16	4 3/4	4.026	1 1/16	6.60
	5	2 7/16	7 1/4	5 1/4	5.047	1	9.00
	6	2 11/16	8 11/16	6 1/16	6.065	1 3/16	15.50