

Ferrule Set (FS)



Duolok Part #	TUBE O.D.
DM6FS	6
DM8FS	8
DM10FS	10
DM12FS	12



A Ferrule Set (FS) consists of one front ferrule and one rear ferrule and is conveniently packaged and sold in multiples of ten sets per "holding tube" housing. *To order twenty (20) sets of the 1/4" 316 Stainless Steel front and back ferrules, specify: 20 pcs. ISSD4FS*

Tube Insert (TI)


Duolok Part #	TUBE O.D.	TUBE I.D.	I.D. OF BORE
DM6TI4	6	4	2.8
DM8TI6	8	6	4.4
DM10TI8	10	8	6.4
DM12TI8	12	8	6.4
DM12TI10	12	10	8.3

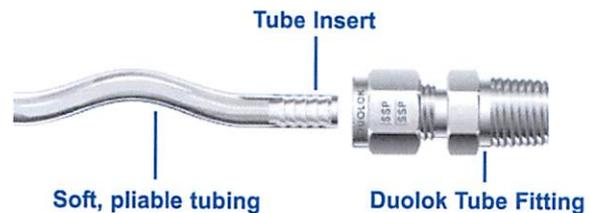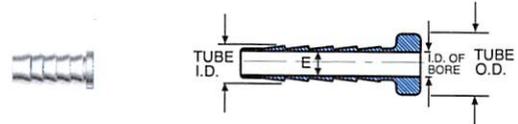

In general, Duolok tube fittings may be used with a variety of plastic tube materials without any special preparations. However, very soft-wall, pliable tubing such as Tygon® needs a tube insert for support prior to insertion in the Duolok tube fitting. The standard Duolok tube fitting installation instructions (see page 6) are then followed for proper make-up.

Bonded Washer (DW)

Duolok Part #	ISO PIPE SIZE	E	A	L
4DW-BSPP	1/4	13.7	20.6	2
6DW-BSPP	3/8	17.3	23.9	2
8DW-BSPP	1/2	21.6	28.7	2.5
12DW-BSPP	3/4	26.9	35.1	2.5
16DW-BSPP	1	33.8	42.9	2.5



Comes standard as 300 series stainless steel washer with Buna inner ring. Also available with Viton® ring or as a stainless steel washer with Viton® ring. Add -V for Viton® or -SS-V for stainless steel/ Viton®