


## APPLICATIONS:

Process instrumentation, High Temperature and Cryogenic services, High pressure service, Vacuum services.

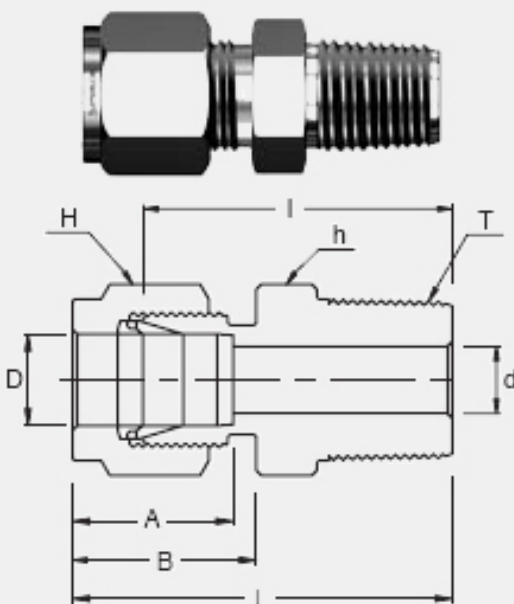

- ➔ Two ferrule design
- ➔ Stainless steel, Duplex, Carbon steel, Hastelloy, Alloy 400, 600, 825
- ➔ Gaugeability
- ➔ Vibration resistance
- ➔ Reliable remake capabilities
- ➔ Excellent Leak-Free Sealing System in high thermal stresses and high impulse

## INTERCHANGEABLE WITH:

**Swagelok:** SS-400-1-4  
**SSP Duolok:** ISSD4MC4  
**Parker A-Lok:** 4MSC4N-SS

## CONNECTS FRACTIONAL TUBE TO FEMALE NPT THREAD

Part No.	Tube O.D. D (inch)	T (NPT)	d Min	Width Across Flat		A	B	I	L
				h (inch)	H (inch)				
SMC 4-4N	1/4	1/4	4.82	9/16	9/16	15.24	17.78	30.48	37.84