


APPLICATIONS:

Process instrumentation, High Temperature and Cryogenic services, High pressure service, Vacuum services.

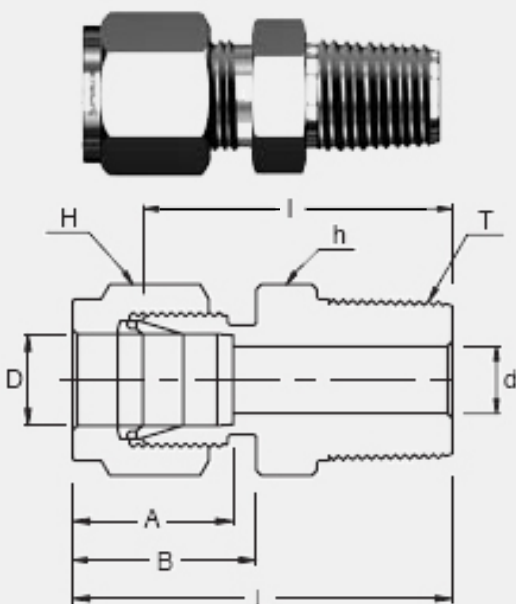

- ➔ Two ferrule design
- ➔ Stainless steel, Duplex, Carbon steel, Hastelloy, Alloy 400, 600, 825
- ➔ Gaugeability
- ➔ Vibration resistance
- ➔ Reliable remake capabilities
- ➔ Excellent Leak-Free Sealing System in high thermal stresses and high impulse

INTERCHANGEABLE WITH:

Swagelok: SS-810-1-8
SSP Duolok: ISSD8MC8
Parker A-Lok: 8MSC8N-SS

CONNECTS FRACTIONAL TUBE TO FEMALE NPT THREAD

| Part No. | Tube O.D. D (inch) | T (NPT) | d Min | Width Across Flat | | A | B | I | L |
|----------|-----------------------|------------|----------|-------------------|----------|-------|-------|-------|-------|
| | | | | h (inch) | H (inch) | | | | |
| SMC 8-8N | 1/2 | 1/2 | 10.41 | 7/8 | 7/8 | 22.86 | 21.84 | 38.86 | 49.02 |