


### APPLICATIONS:

Process instrumentation, High Temperature and Cryogenic services, High pressure service, Vacuum services.

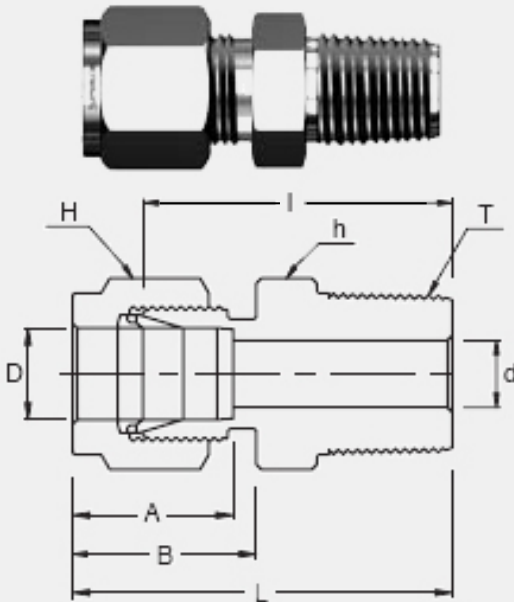

- ➔ Two ferrule design
- ➔ Stainless steel, Duplex, Carbon steel, Hastelloy, Alloy 400, 600, 825
- ➔ Gaugeability
- ➔ Vibration resistance
- ➔ Reliable remake capabilities
- ➔ Excellent Leak-Free Sealing System in high thermal stresses and high impulse

### INTERCHANGEABLE WITH:

**Swagelok:** SS-1010-1-8  
**SSP Duolok:** ISSD10MC8  
**Parker A-Lok:** 10MSC8N-SS

### CONNECTS FRACTIONAL TUBE TO FEMALE NPT THREAD

Part No.	Tube O.D. D (inch)	T (NPT)	d Min	Width Across Flat		A	B	I	L
				h (inch)	H (inch)				
SMC 10-8N	5/8	1/2	11.93	15/16	1	24.38	21.84	38.86	49.02