


APPLICATIONS:

Process instrumentation, High Temperature and Cryogenic services, High pressure service, Vacuum services.

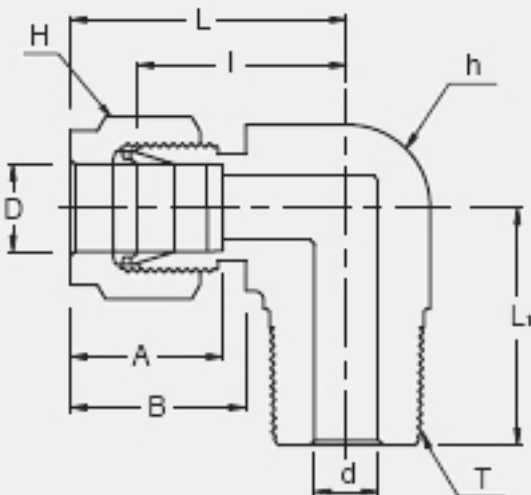

- ➔ Two ferrule design
- ➔ Stainless steel, Duplex, Carbon steel, Hastelloy, Alloy 400, 600, 825
- ➔ Gaugeability
- ➔ Vibration resistance
- ➔ Reliable remake capabilities
- ➔ Excellent Leak-Free Sealing System in high thermal stresses and high impulse

INTERCHANGEABLE WITH:

Swagelok: SS-400-2-4
SSP Duolok: ISSD4ME4
Parker A-Lok: 4MSEL4N-SS

CONNECTS FRACTIONAL TUBE TO FEMALE NPT THREAD

Part No.	Tube O.D. D (inch)	T (NPT)	d Min	Width Across Flat		<u>A</u>	<u>B</u>	<u>I</u>	<u>L</u>	<u>L1</u>
				<u>h</u> (inch)	<u>H</u> (inch)					
SME 4-4N	1/4	1/4	4.82	1/2	9/16	15.24	17.78	19.55	26.92	23.36