


APPLICATIONS:

Process instrumentation, High Temperature and Cryogenic services, High pressure service, Vacuum services.

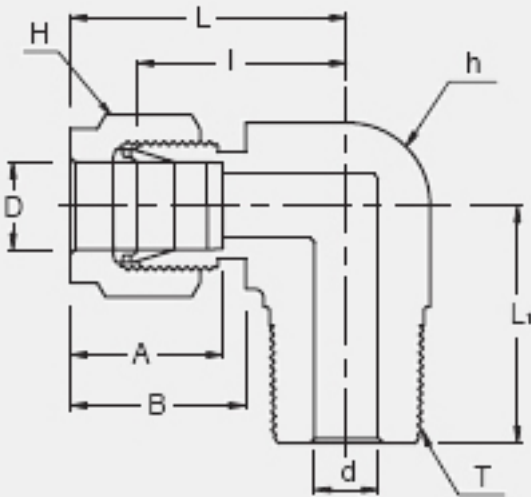

- ➔ Two ferrule design
- ➔ Stainless steel, Duplex, Carbon steel, Hastelloy, Alloy 400, 600, 825
- ➔ Gaugeability
- ➔ Vibration resistance
- ➔ Reliable remake capabilities
- ➔ Excellent Leak-Free Sealing System in high thermal stresses and high impulse

INTERCHANGEABLE WITH:

Swagelok: SS-600-2-8
SSP Duolok: ISSD6ME8
Parker A-Lok: 6MSEL8N-SS

CONNECTS FRACTIONAL TUBE TO FEMALE NPT THREAD

Part No.	Tube O.D. D (inch)	T (NPT)	d Min	Width Across Flat		<u>A</u>	<u>B</u>	<u>I</u>	<u>L</u>	<u>L1</u>
				<u>h (inch)</u>	<u>H (inch)</u>					
SME 6-8N	3/8	1/2	7.11	13/16	11/16	16.76	19.30	25.90	33.27	33.02